



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
PETERBILT 9571508
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER15W40 (45 QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.













CONTAMINATION

Fuel content negligible. There is no indication of any contamination in the oil.

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0000913	---	---
Sample Date		Client Info		28 Mar 2022	---	---
Machine Age	mls	Client Info		48034	---	---
Oil Age	mls	Client Info		8777	---	---
Filter Age	mls	Client Info		8777	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---
Iron	ppm	ASTM D5185m	>90	20	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>2	0	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	12	---	---
Lead	ppm	ASTM D5185m	>40	1	---	---
Copper	ppm	ASTM D5185m	>330	<1	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>25	5	---	---
Potassium	ppm	ASTM D5185m	>20	35	---	---
Fuel	%	ASTM D3524	>3.0	1.2	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>6	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.1	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	0	50	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	6	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	0	737	---	---
Calcium	ppm	ASTM D5185m		1385	---	---
Phosphorus	ppm	ASTM D5185m		757	---	---
Zinc	ppm	ASTM D5185m		899	---	---
Sulfur	ppm	ASTM D5185m		2803	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.0	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	7.2	---	---
Visc @ 100°C	cSt	ASTM D445	14	11.5	---	---

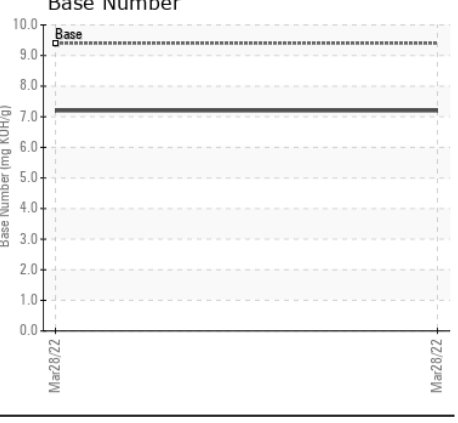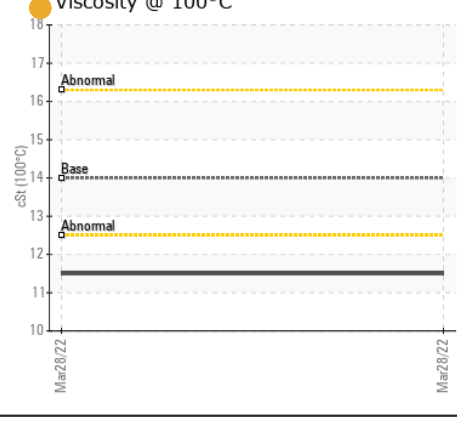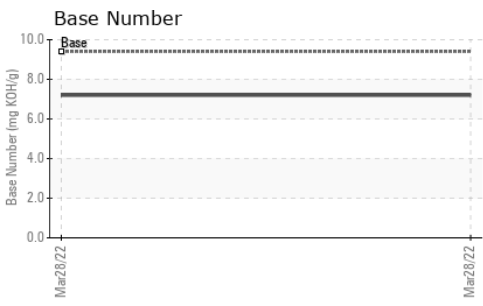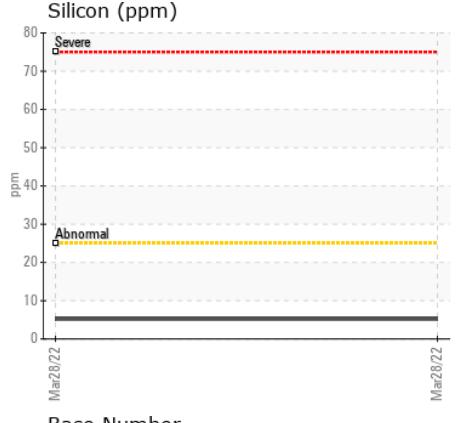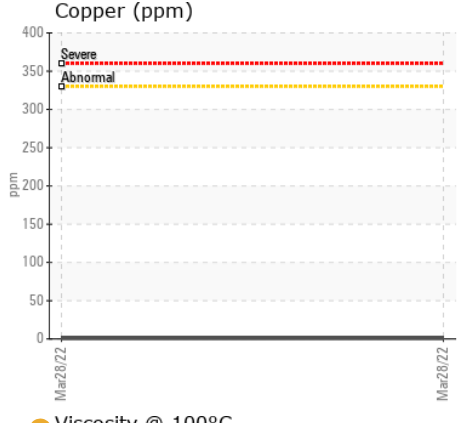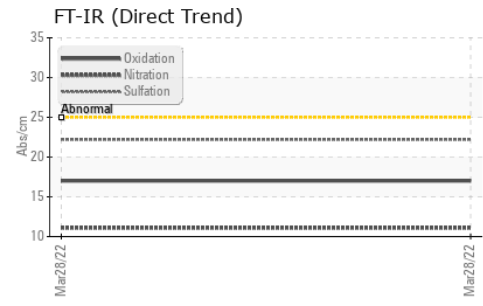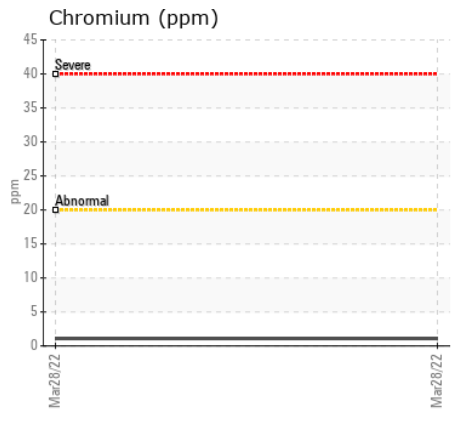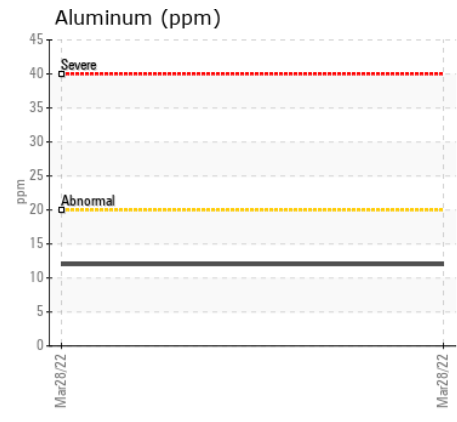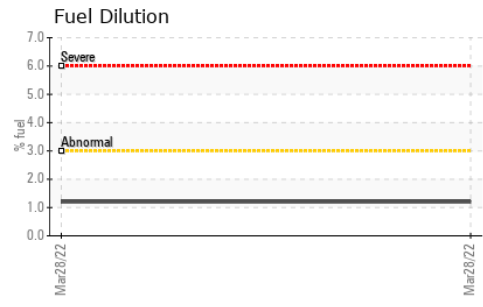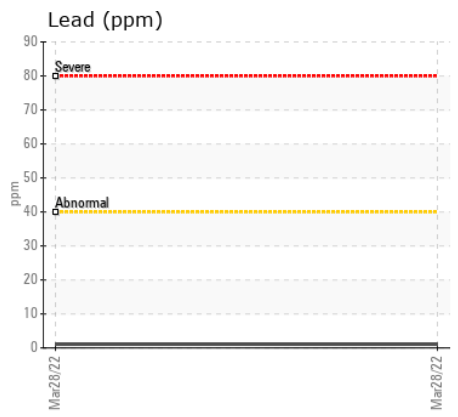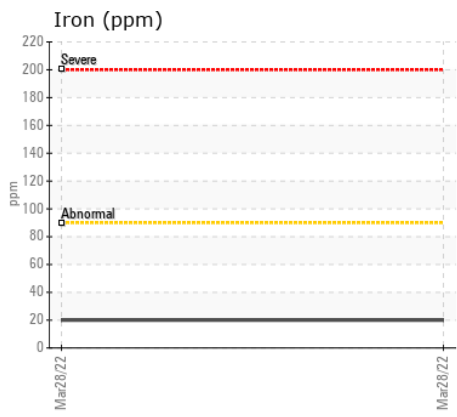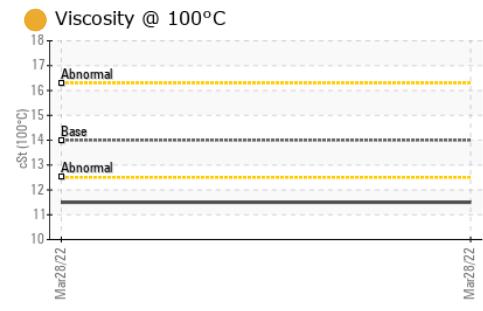

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0000913 **Received** : 19 Apr 2022
Lab Number : 05523305 **Tested** : 21 Apr 2022
Unique Number : 9942585 **Diagnosed** : 21 Apr 2022 - Don Baldrige
Test Package : MOB1+ (Additional Tests: FuelDilution, PercentFuel)

RTL PACLEASE - 7004 - Austin
 1205 Smith Road
 Austin, TX
 US 78721
 Contact: David Johnson
 JohnsonD@RushEnterprises.com
 T: (512)401-7063
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)