



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**{unassigned}**  
Machine Id  
**JOHN DEERE 250GLC 1FF250GXCLF611600**  
Component  
**Swing Drive**  
Fluid  
**JOHN DEERE GL-5 80W90 (2 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0030074</b>	LEC0024376	---
Sample Date		Client Info		<b>25 Apr 2022</b>	29 Nov 2021	---
Machine Age	hrs	Client Info		<b>1282</b>	745	---
Oil Age	hrs	Client Info		<b>1282</b>	745	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>None</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>101</b>	94	---
Iron	ppm	ASTM D5185m	>151	<b>174</b>	104	---
Chromium	ppm	ASTM D5185m	>11	<b>1</b>	1	---
Nickel	ppm	ASTM D5185m		<b>0</b>	1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>21	<b>1</b>	<1	---
Lead	ppm	ASTM D5185m	>51	<b>0</b>	2	---
Copper	ppm	ASTM D5185m	>51	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	<b>19</b>	16	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	5	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>&lt;1</b>	1	---
Boron	ppm	ASTM D5185m		<b>58</b>	61	---
Barium	ppm	ASTM D5185m		<b>0</b>	3	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>2</b>	2	---
Magnesium	ppm	ASTM D5185m		<b>0</b>	<1	---
Calcium	ppm	ASTM D5185m		<b>19</b>	17	---
Phosphorus	ppm	ASTM D5185m		<b>559</b>	451	---
Zinc	ppm	ASTM D5185m		<b>7</b>	9	---
Sulfur	ppm	ASTM D5185m		<b>13418</b>	13841	---
Visc @ 40°C	cSt	ASTM D445		<b>186</b>	189	---

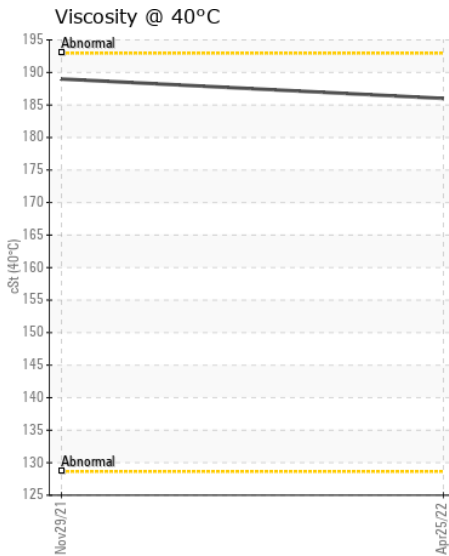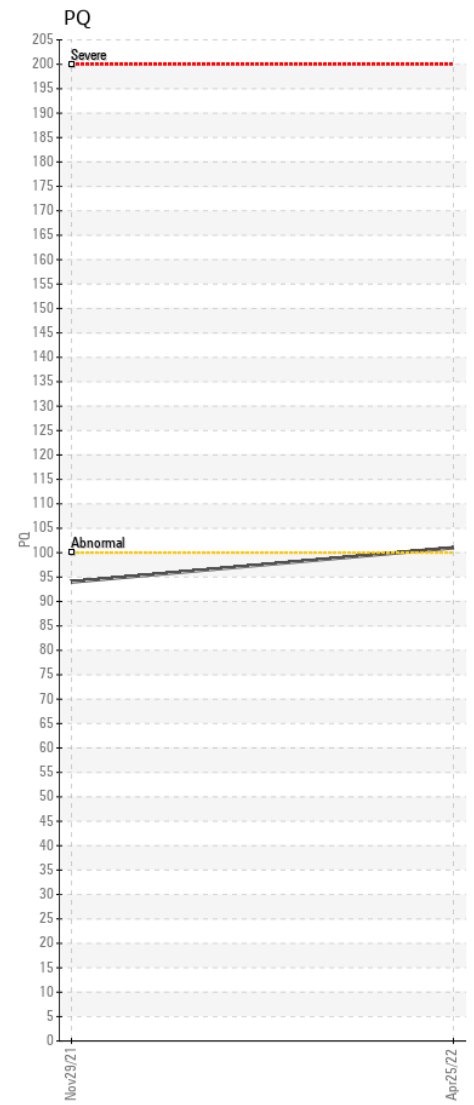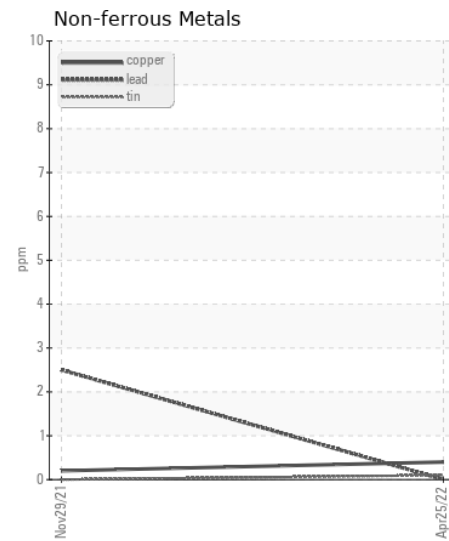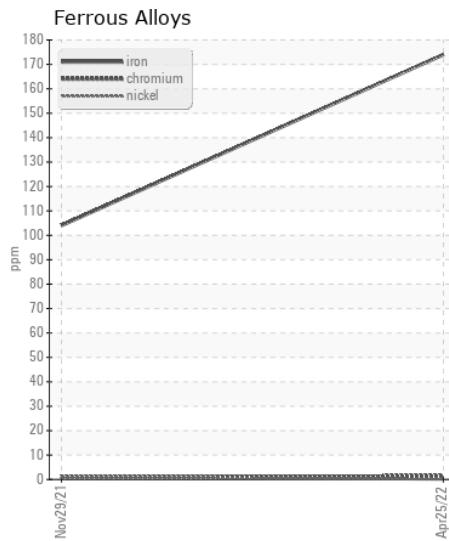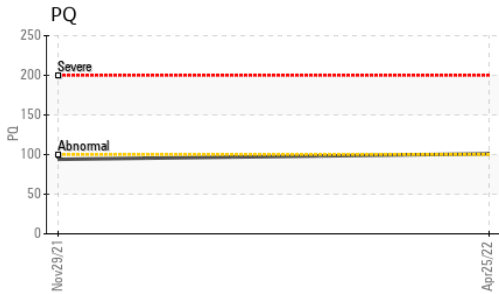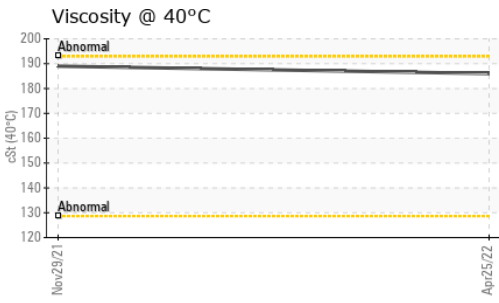

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0030074 **Received** : 28 Apr 2022  
**Lab Number** : 05532096 **Diagnosed** : 02 May 2022  
**Unique Number** : 9956385 **Diagnostician** : Jonathan Hester  
**Test Package** : CONST ( Additional Tests: PQ )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com  
 T:  
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)