



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Area

[05w33992]

Machine Id

JOHN DEERE 350G 1FF350GXHMF815079

Component

Hydraulic System

Fluid

HITACHI HYDRAULIC SUPER EX 46HN (--- QTS)

RECOMMENDATION

Recommend drain oil if not already done. Reduce drain interval to 2000 hours or drain and flush and use recommended zinc free oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0123304	JR0122813	JR0116750
Sample Date		Client Info		21 Jun 2022	01 Apr 2022	22 Feb 2022
Machine Age	hrs	Client Info		1956	1507	1067
Oil Age	hrs	Client Info		1956	1067	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Not Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	21	14	13
Iron	ppm	ASTM D5185m	>32	7	3	3
Chromium	ppm	ASTM D5185m	>9	<1	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>9	1	<1	<1
Lead	ppm	ASTM D5185m	>28	0	0	<1
Copper	ppm	ASTM D5185m	>50	5	<1	2
Tin	ppm	ASTM D5185m	>5	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>11	2	1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	59844	32566	4775
Particles >6µm		ASTM D7647	>20000	4179	1432	793
Particles >14µm		ASTM D7647	>640	42	22	95
Particles >21µm		ASTM D7647	>160	11	6	24
Particles >38µm		ASTM D7647	>40	0	0	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/21/16	23/19/13	22/18/12	19/17/14
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

Zinc level above manufacturer's recommendations. The AN level is acceptable for this fluid.

Sodium	ppm	ASTM D5185m	>21	<1	0	0
Boron	ppm	ASTM D5185m		2	<1	1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		164	0	1
Phosphorus	ppm	ASTM D5185m	827	548	487	580
Zinc	ppm	ASTM D5185m	0	▲ 101	14	24
Sulfur	ppm	ASTM D5185m	13	300	50	70
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.38	0.166	0.16
Visc @ 40°C	cSt	ASTM D445	47	47.9	47.3	47.6

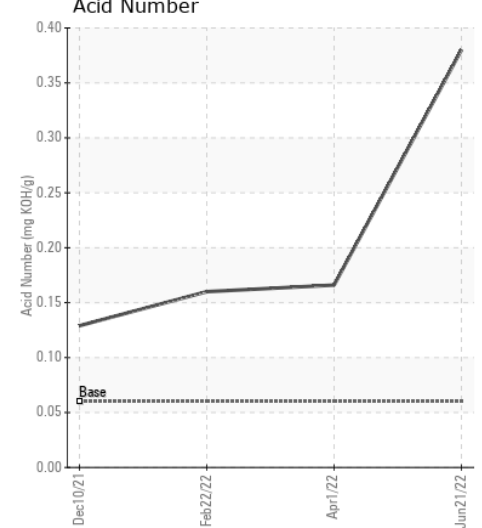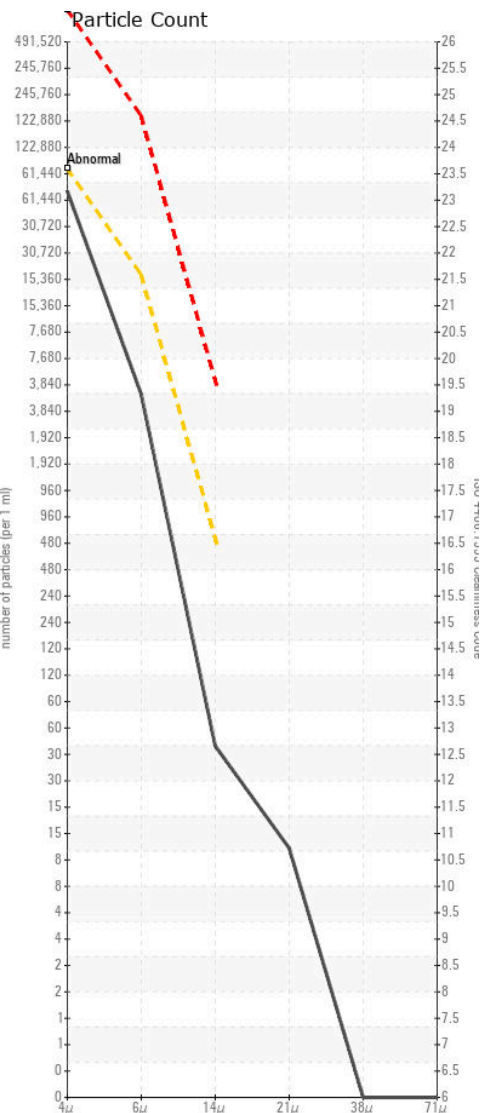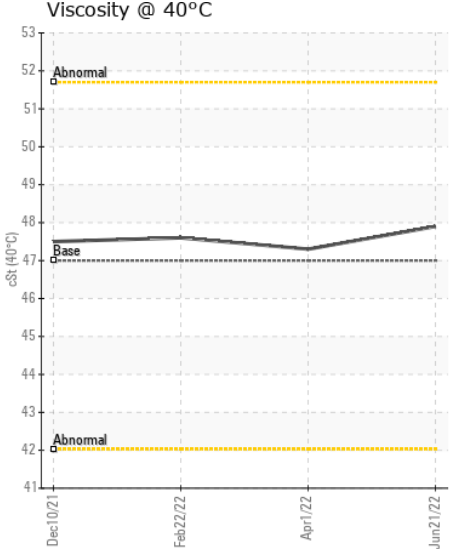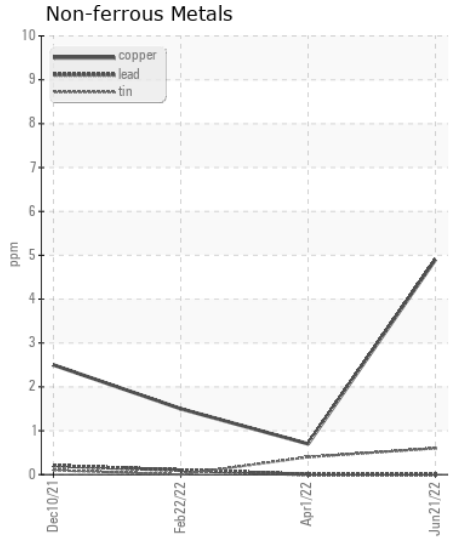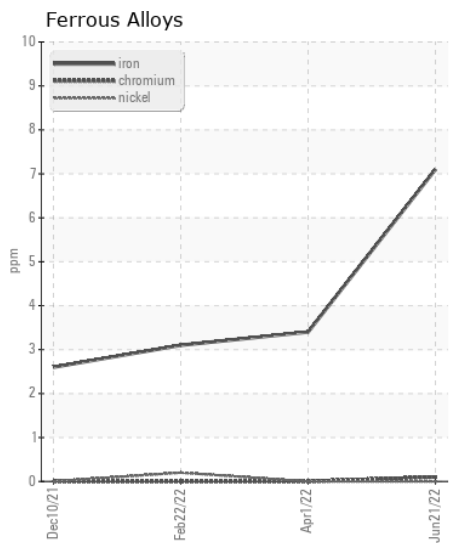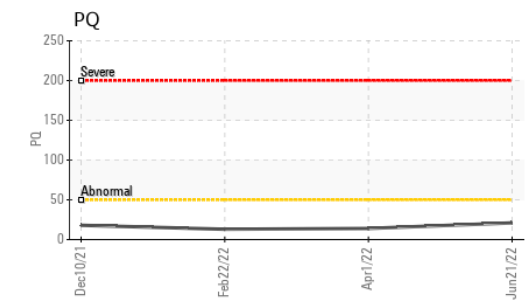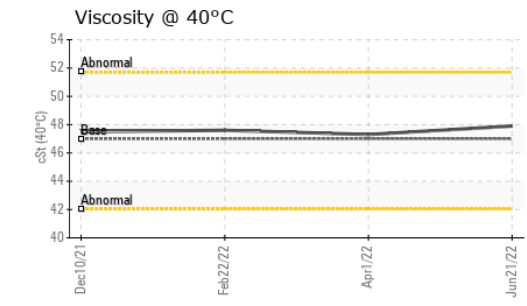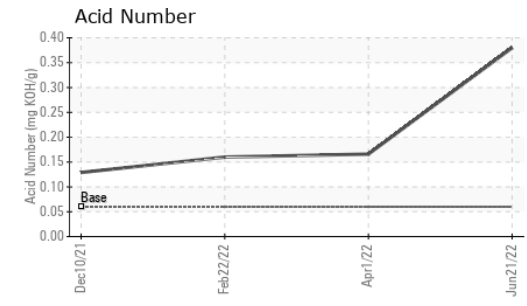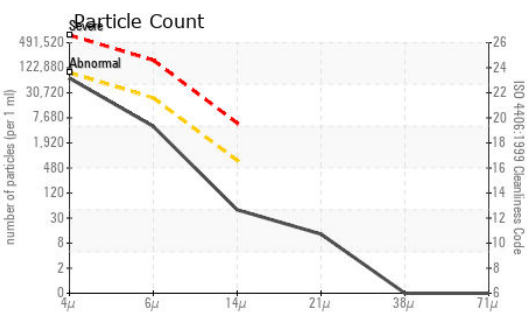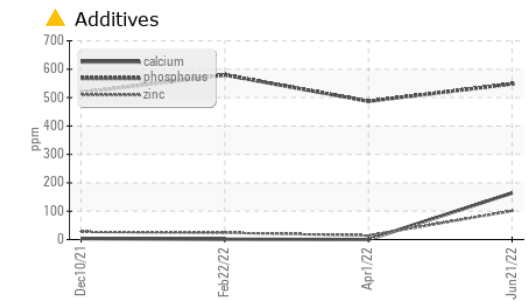

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0123304 **Received** : 23 Jun 2022
Lab Number : 05575659 **Diagnosed** : 25 Jun 2022
Unique Number : 10025076 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111
 Contact: DON VEST
 dvest@jamesriverequipment.com
 T: (703)631-8500
 F: (703)631-4715

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)