



WEAR	<b>SEVERE</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[W49654 SEG 7]**  
 Machine Id  
**JOHN DEERE 672G 6309 (S/N 1DW672GPADE656175)**  
 Component  
**Circle Gearbox**  
 Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0114228</b>	---	---
Sample Date		Client Info		<b>17 Aug 2022</b>	---	---
Machine Age	hrs	Client Info		<b>3684</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Chngd</b>	---	---
Filter Changed		Client Info		<b>Not Chngd</b>	---	---
Sample Status				<b>SEVERE</b>	---	---

### WEAR

Bearing and/or bushing wear is indicated. High concentration of visible metal present.

PQ		ASTM D8184		<b>16</b>	---	---
Iron	ppm	ASTM D5185m	>200	<b>81</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m		<b>▲ 351</b>	---	---
Lead	ppm	ASTM D5185m		<b>2</b>	---	---
Copper	ppm	ASTM D5185m		<b>▲ 2851</b>	---	---
Tin	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>▲ HEAVY</b>	---	---

### CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>16</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185m		<b>3</b>	---	---
Boron	ppm	ASTM D5185m		<b>3</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>148</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>69</b>	---	---
Calcium	ppm	ASTM D5185m		<b>3353</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>994</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1817</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3677</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>56.5</b>	---	---

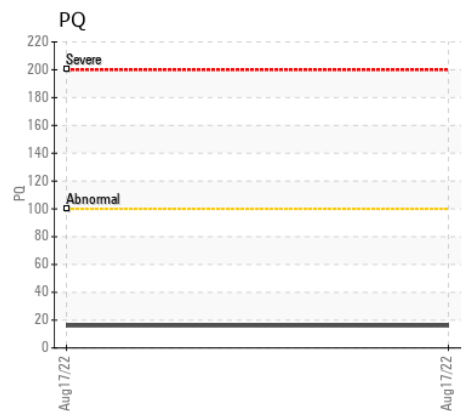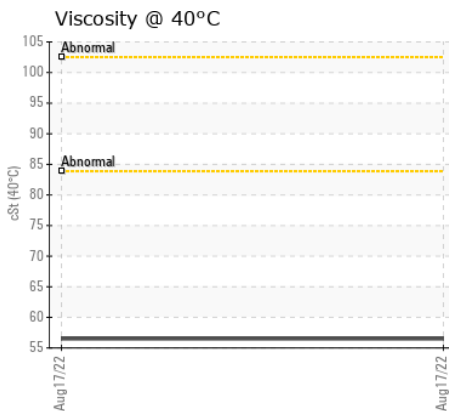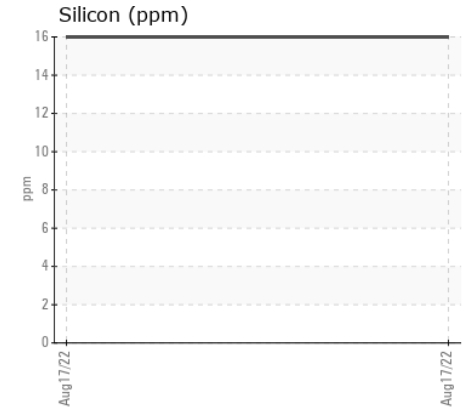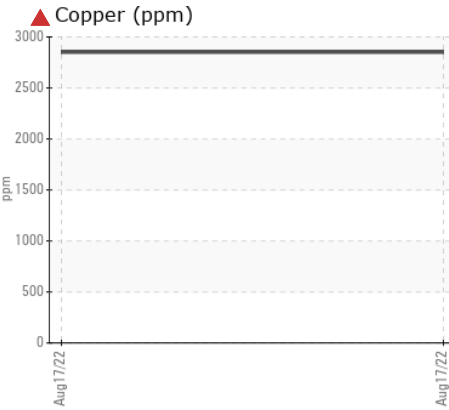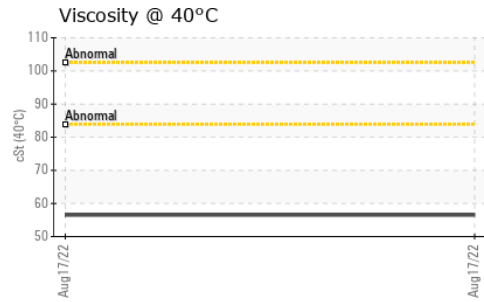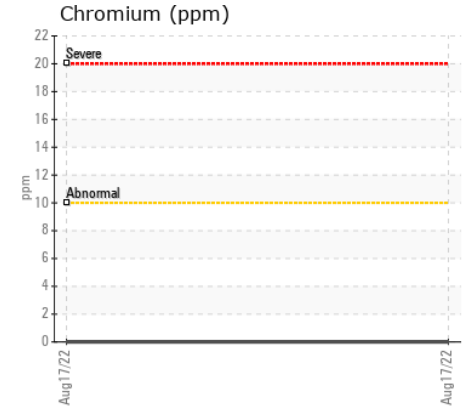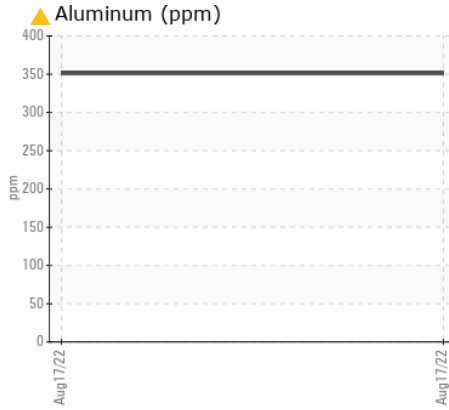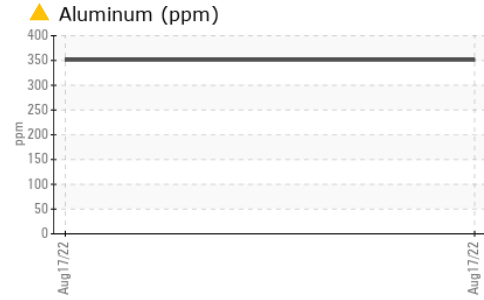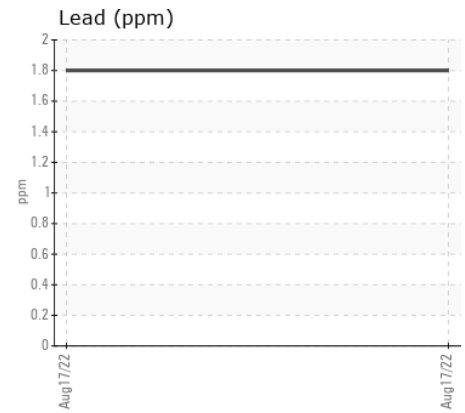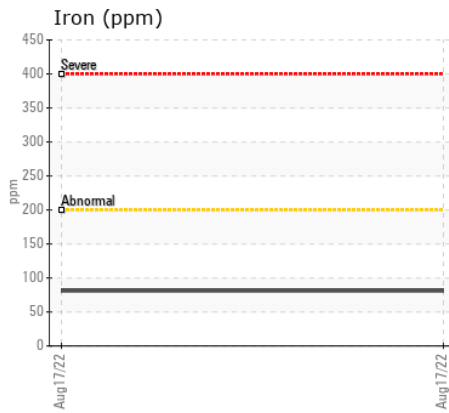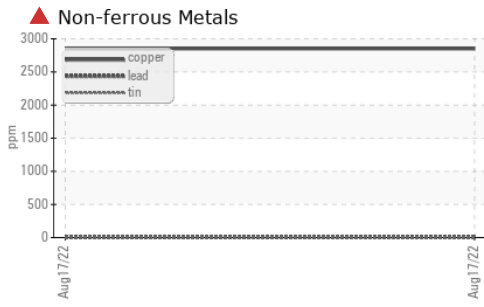

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0114228 **Received** : 22 Aug 2022  
**Lab Number** : 05623389 **Tested** : 23 Aug 2022  
**Unique Number** : 10102896 **Diagnosed** : 24 Aug 2022 - Jonathan Hester  
**Test Package** : MOBCE ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CK CONTRACTING**  
 124-1 WOODING PL  
 KINGS MOUNTAIN, NC  
 US 28086  
 Contact: TAM WRIGHT  
 twright@ckcdllc.com  
 T: (704)730-9948  
 F: (704)730-9975