



WEAR	ABNORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
GEHL DL11-55 5009671 (S/N DL1155CL41909)

Component
Front Differential

Fluid
MOBIL MOBILFLUID 424 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

Gear wear is indicated.

CONTAMINATION

Elemental level of silicon (Si) above normal indicating ingress of seal material.

FLUID CONDITION









The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0137531	JR0067425	JR0067396
Sample Date		Client Info		17 Aug 2022	20 Nov 2020	18 Nov 2020
Machine Age	hrs	Client Info		1596	986	1405
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Filter Changed		Client Info		Not Changd	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		523	1014	177
Iron	ppm	ASTM D5185m	>500	▲ 810	703	139
Chromium	ppm	ASTM D5185m	>10	4	3	<1
Nickel	ppm	ASTM D5185m		0	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>25	6	6	0
Lead	ppm	ASTM D5185m	>25	<1	<1	0
Copper	ppm	ASTM D5185m	>100	2	1	1
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	LIGHT	HEAVY	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>75	▲ 161	▲ 155	60
Potassium	ppm	ASTM D5185m	>20	2	<1	1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m		5	9	2
Boron	ppm	ASTM D5185m		117	119	54
Barium	ppm	ASTM D5185m		0	0	1
Molybdenum	ppm	ASTM D5185m		385	424	43
Manganese	ppm	ASTM D5185m		8	7	2
Magnesium	ppm	ASTM D5185m		2	3	27
Calcium	ppm	ASTM D5185m		819	964	2416
Phosphorus	ppm	ASTM D5185m		838	983	997
Zinc	ppm	ASTM D5185m		1397	1521	1292
Sulfur	ppm	ASTM D5185m		5552	6066	4306
Visc @ 40°C	cSt	ASTM D445	55	98.7	106	69.8

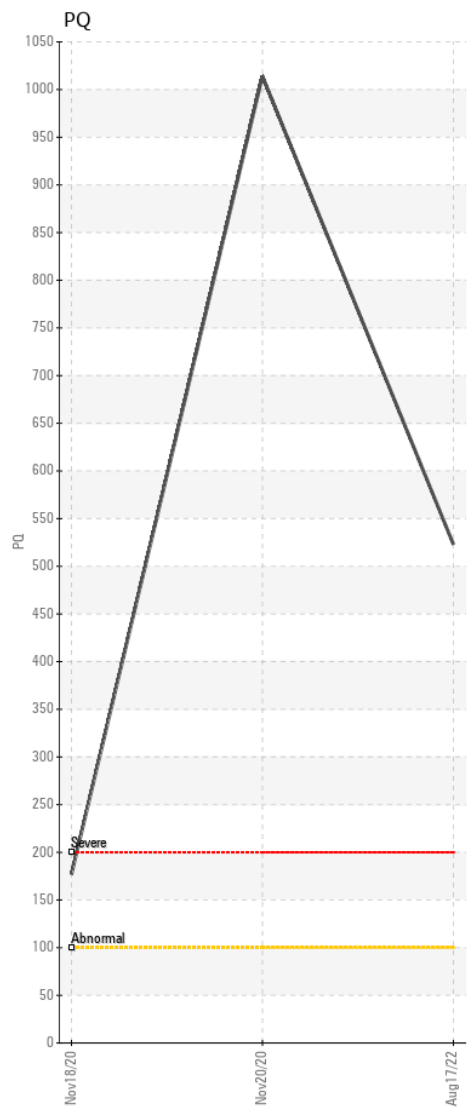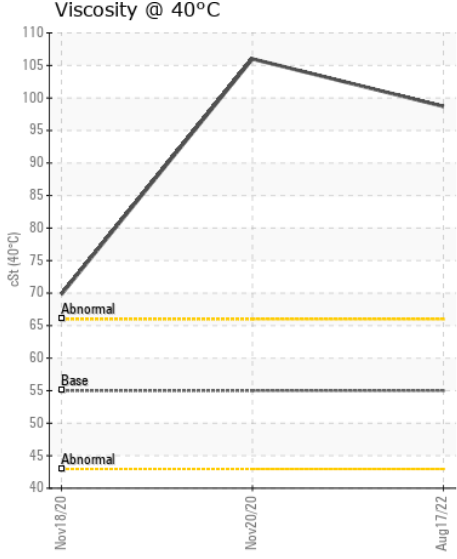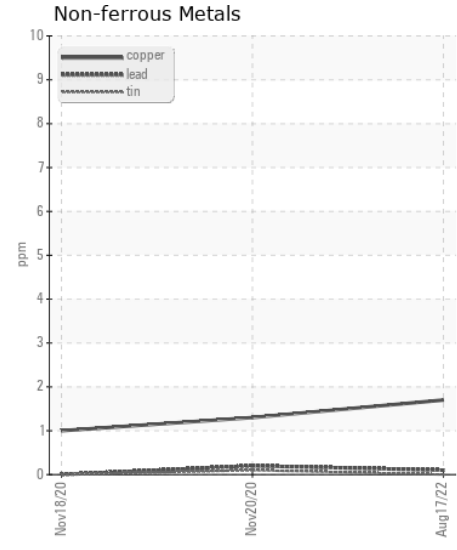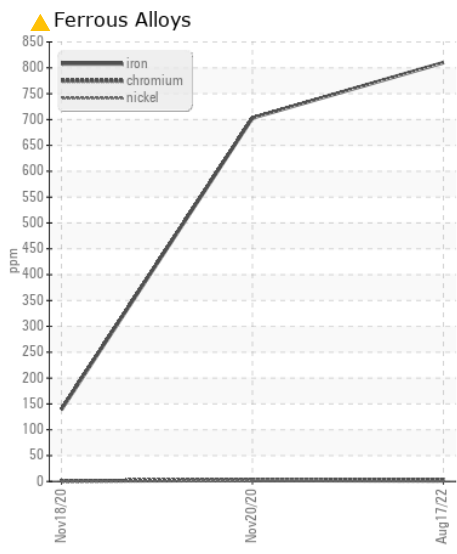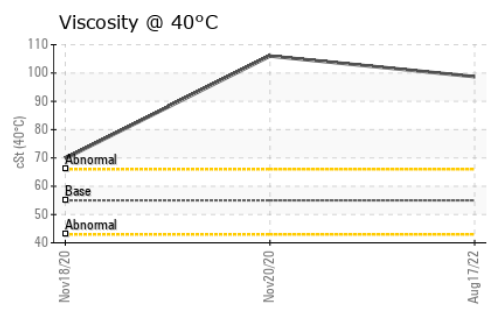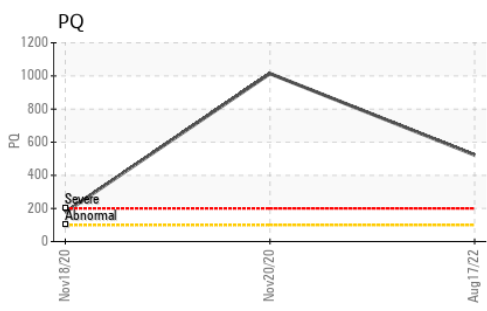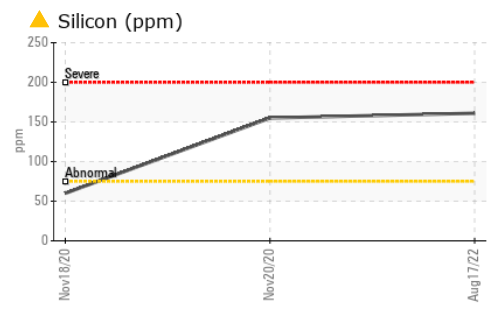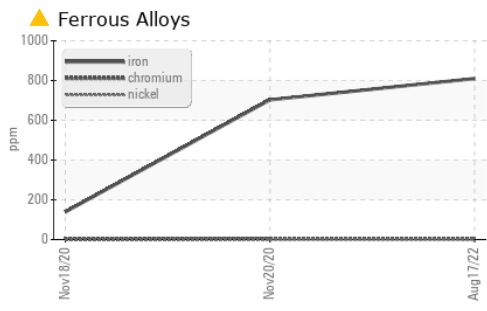

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0137531 **Received** : 24 Aug 2022
Lab Number : 05626449 **Tested** : 27 Aug 2022
Unique Number : 10110970 **Diagnosed** : 27 Aug 2022 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - STEPHENSON
 245 YARDMASTER COURT
 STEPHENSON, VA
 US 22656-1761
 Contact: PHIL DAUGHERTY
 pdaugherty@jamesriverequipment.com
 T: x:
 F: (540)693-2588

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)