



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH40M 1215-124371
Component
Rear Right Wheel Hub
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0236264	LH0213422	---
Sample Date		Client Info		06 Sep 2022	24 Feb 2022	---
Machine Age	hrs	Client Info		1949	1033	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Not Changed	None	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>650	13	28	---
Chromium	ppm	ASTM D5185m	>4	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m	>4	0	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	0	---
Lead	ppm	ASTM D5185m	>4	<1	<1	---
Copper	ppm	ASTM D5185m	>60	9	27	---
Tin	ppm	ASTM D5185m	>4	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	7	---
Potassium	ppm	ASTM D5185m	>20	0	1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	4	---
Boron	ppm	ASTM D5185m		11	10	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	2	---
Manganese	ppm	ASTM D5185m		<1	2	---
Magnesium	ppm	ASTM D5185m		<1	2	---
Calcium	ppm	ASTM D5185m		58	307	---
Phosphorus	ppm	ASTM D5185m		2210	2354	---
Zinc	ppm	ASTM D5185m		18	77	---
Sulfur	ppm	ASTM D5185m		25056	26286	---
Visc @ 40°C	cSt	ASTM D445		169	154	---

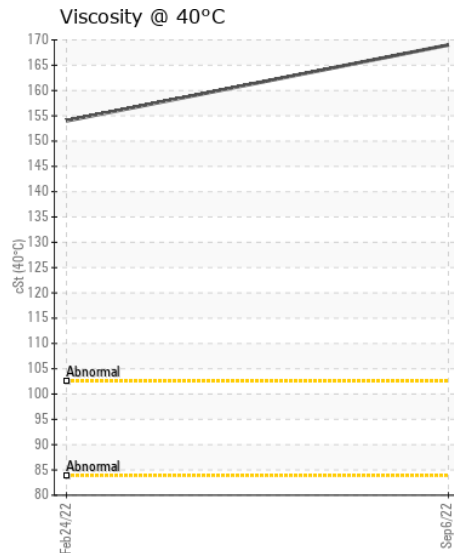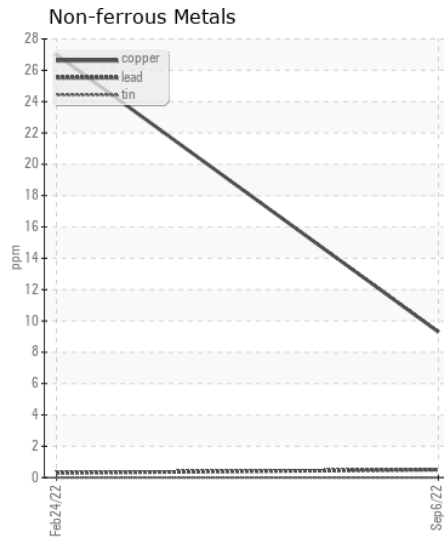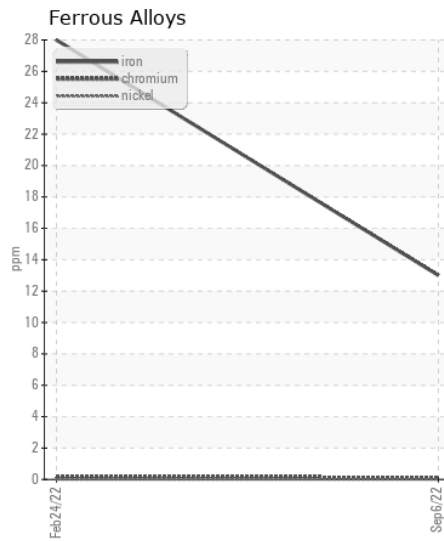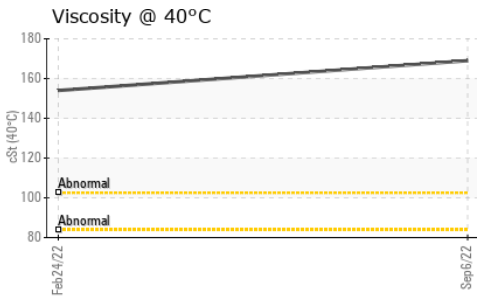

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0236264
Lab Number : 05641752
Unique Number : 10136291
Test Package : CONST
Received : 14 Sep 2022
Tested : 15 Sep 2022
Diagnosed : 15 Sep 2022 - Angela Borella

SADOFF IRON AND METAL
 240 ARNDT STREET
 FOND DU LAC, WI
 US 54936
 Contact: DAVE CASPER
 casperd@sadoff.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: