



TRAAP

Texas Refinery Advanced Analysis Program

# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id  
**DODGE 40 DRAG TOP M10 WEST**  
 Component  
**Gearbox**  
 Fluid  
**MOBIL SHC 630 (4 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

## WEAR

All component wear rates are normal.












## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION

Viscosity of sample indicates oil is within ISO 150 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR05645590	---	---
Sample Date		Client Info		12 Sep 2022	---	---
Machine Age	yrs	Client Info		0	---	---
Oil Age	yrs	Client Info		7	---	---
Filter Age	yrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ATTENTION	---	---
Iron	ppm	ASTM D5185m	>200	22	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>25	<1	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>200	0	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>50	36	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		<1	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m		<1	---	---
Phosphorus	ppm	ASTM D5185m		696	---	---
Zinc	ppm	ASTM D5185m		9	---	---
Sulfur	ppm	ASTM D5185m		127	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.13	---	---
Visc @ 100°C	cSt	ASTM D445	25.9	15.0	---	---

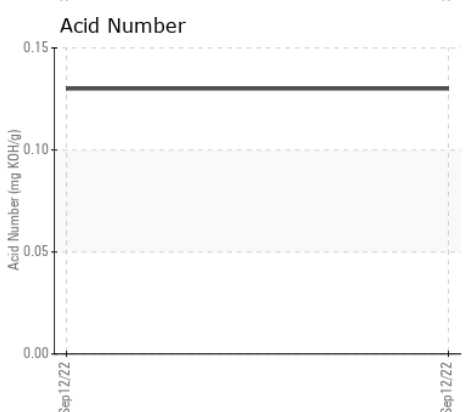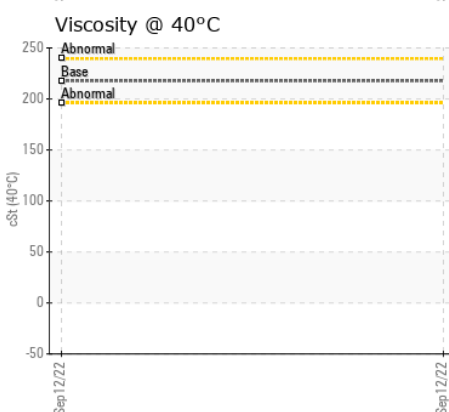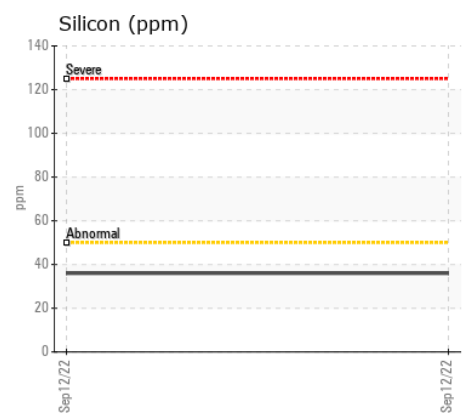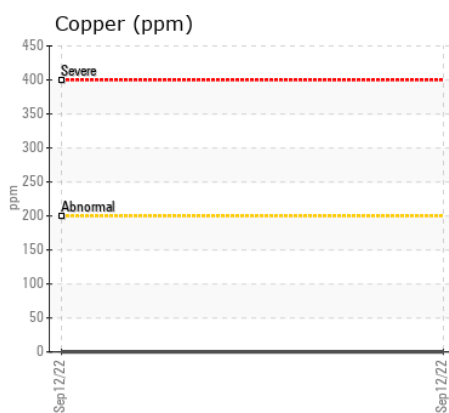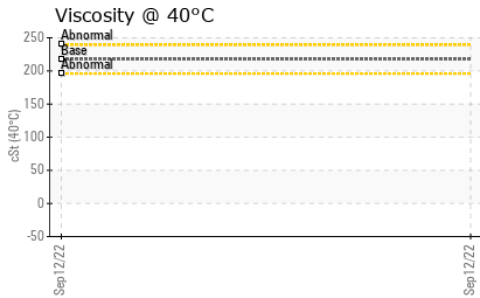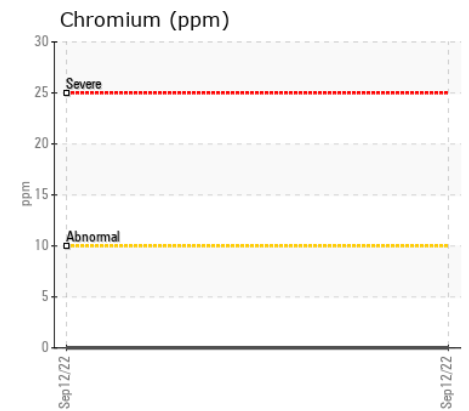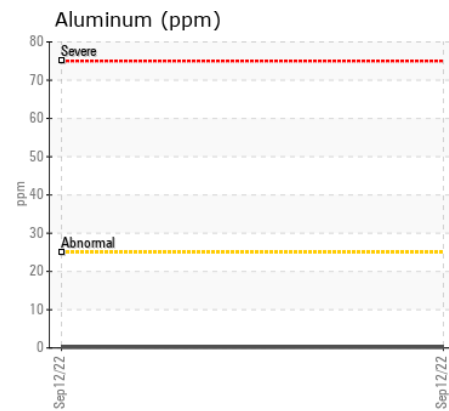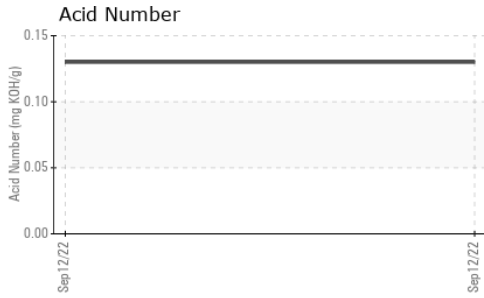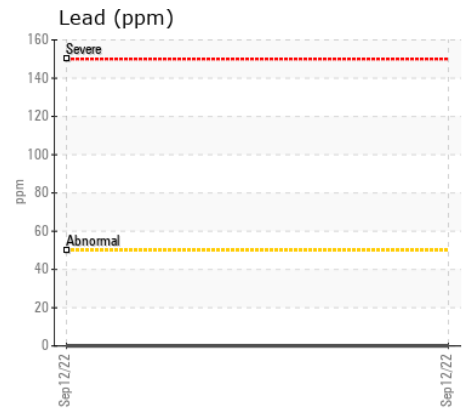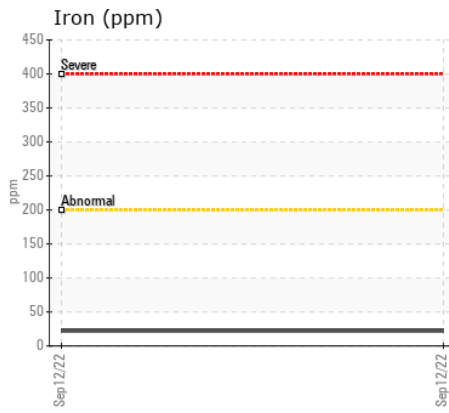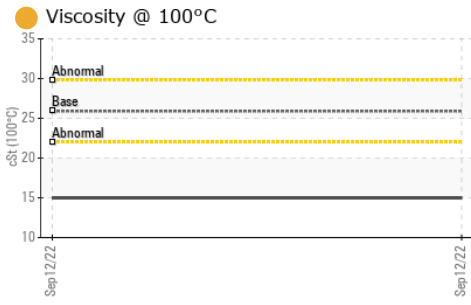

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TR05645590 **Received** : 19 Sep 2022  
**Lab Number** : 05645590 **Tested** : 21 Sep 2022  
**Unique Number** : 10140129 **Diagnosed** : 21 Sep 2022 - Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: KV100 )

**HIGHLINE GRAIN GROWERS**  
 9025 S CRAIG RD  
 CHENEY, WA  
 US 99004  
 Contact: RONALD GROGAN

To discuss this sample report, contact Customer Service at 1-800-827-0711.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: