



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
CHALLENGER MT743 MT743 (S/N AGCC0743PJNND1043)
 Component
Diesel Engine
 Fluid
TRC MOLY XL PRO-SPEC IV XP 15W40 (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | TR05673628 | --- | --- |
| Sample Date | | Client Info | | 14 Oct 2022 | --- | --- |
| Machine Age | hrs | Client Info | | 1611 | --- | --- |
| Oil Age | hrs | Client Info | | 416 | --- | --- |
| Filter Age | hrs | Client Info | | 416 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | Changed | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|------|-----|-----|
| Iron | ppm | ASTM D5185m | >100 | 20 | --- | --- |
| Chromium | ppm | ASTM D5185m | >20 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >4 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | >3 | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | --- | --- |
| Lead | ppm | ASTM D5185m | >40 | <1 | --- | --- |
| Copper | ppm | ASTM D5185m | >330 | 2 | --- | --- |
| Tin | ppm | ASTM D5185m | >15 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION













There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|-------|-----|-----|
| Silicon | ppm | ASTM D5185m | >25 | 6 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 0 | --- | --- |
| Fuel | | WC Method | >5 | <1.0 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Glycol | | WC Method | | NEG | --- | --- |
| Soot % | % | *ASTM D7844 | >3 | 0.2 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 10.1 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 21.9 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|-----|------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 0 | --- | --- |
| Boron | ppm | ASTM D5185m | | 6 | --- | --- |
| Barium | ppm | ASTM D5185m | | <1 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 127 | --- | --- |
| Manganese | ppm | ASTM D5185m | | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 26 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 4538 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 918 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 1114 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 4985 | --- | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 11.0 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 12.7 | --- | --- |
| Visc @ 100°C | cSt | ASTM D445 | | 16.0 | --- | --- |

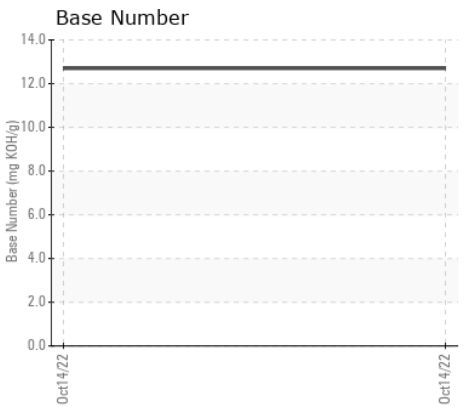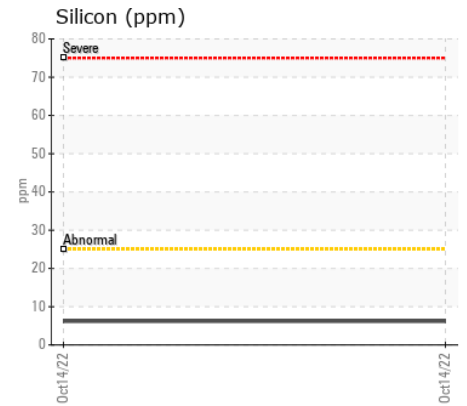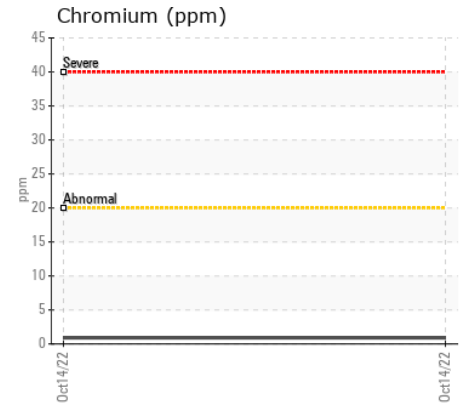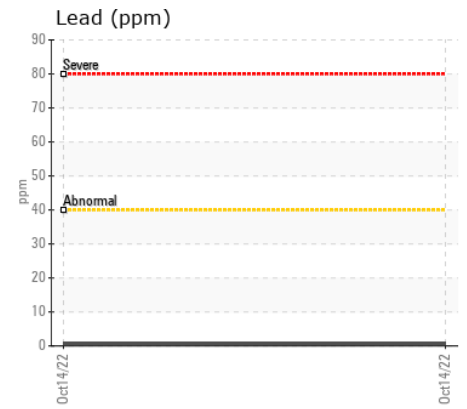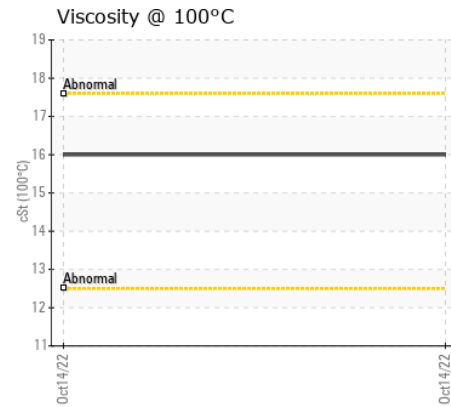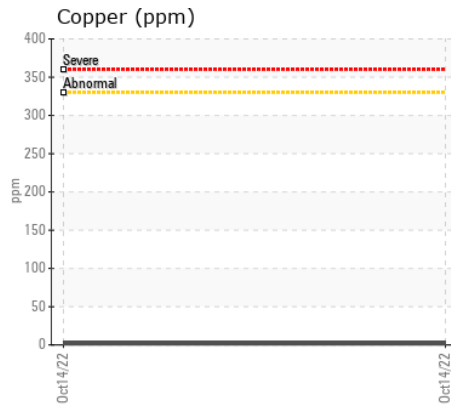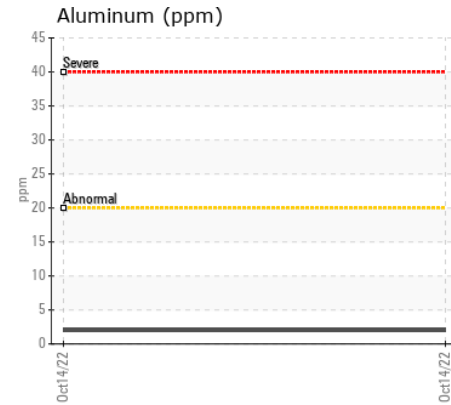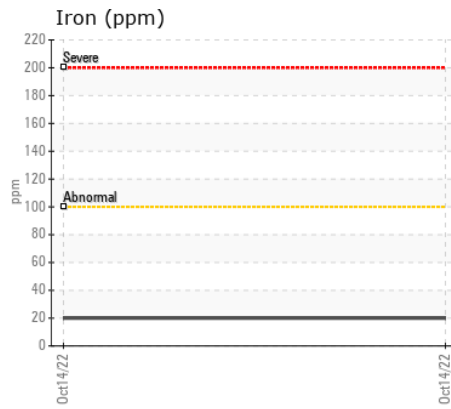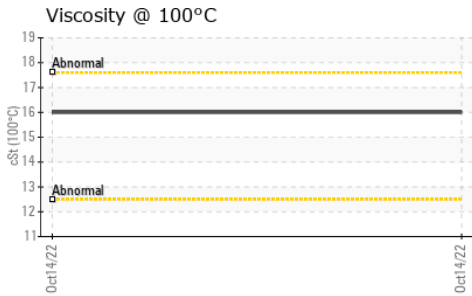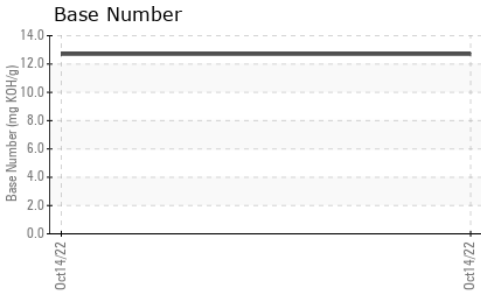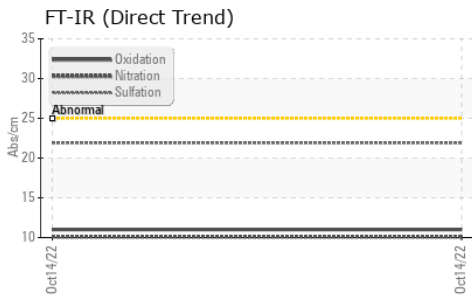

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR05673628 **Received** : 21 Oct 2022
Lab Number : 05673628 **Tested** : 27 Oct 2022
Unique Number : 10183198 **Diagnosed** : 27 Oct 2022 - Wes Davis
Test Package : MOB 2

SLATER BROS FARM LLC
 10001 CANAL RD
 HEBRON, OH
 US 43025
 Contact: SAM SLATER
 SSLATER1357@GMAIL.COM

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: