



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CUMMINS 46537862
 Component
Port Diesel Engine
 Fluid
TRC MOLY XL PRO-SPEC III SYNTHETIC15W40 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR05699920	TR05432118	---
Sample Date		Client Info		20 Oct 2022	20 Nov 2021	---
Machine Age	hrs	Client Info		0	880	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	25	12	---
Chromium	ppm	ASTM D5185m	>20	2	<1	---
Nickel	ppm	ASTM D5185m	>2	2	0	---
Titanium	ppm	ASTM D5185m	>2	<1	<1	---
Silver	ppm	ASTM D5185m	>2	1	1	---
Aluminum	ppm	ASTM D5185m	>20	0	0	---
Lead	ppm	ASTM D5185m	>40	7	<1	---
Copper	ppm	ASTM D5185m	>330	23	11	---
Tin	ppm	ASTM D5185m	>15	2	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	7	---
Potassium	ppm	ASTM D5185m	>20	6	<1	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>6	0.3	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	8.5	6.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2	18.1	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	3	---
Boron	ppm	ASTM D5185m		170	190	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		176	166	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		436	430	---
Calcium	ppm	ASTM D5185m	4500	3853	3832	---
Phosphorus	ppm	ASTM D5185m		901	930	---
Zinc	ppm	ASTM D5185m	1400	1086	970	---
Sulfur	ppm	ASTM D5185m		4460	3062	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.0	11.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	15	13.8	13.3	---
Visc @ 100°C	cSt	ASTM D445	15.5	14.4	15.1	---

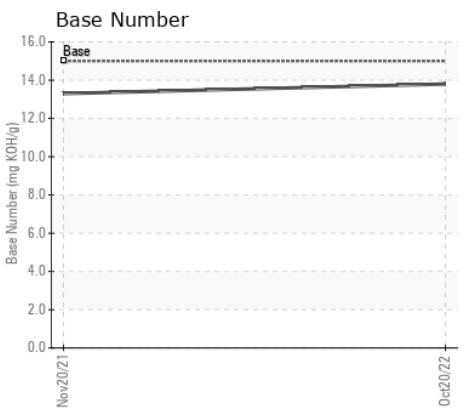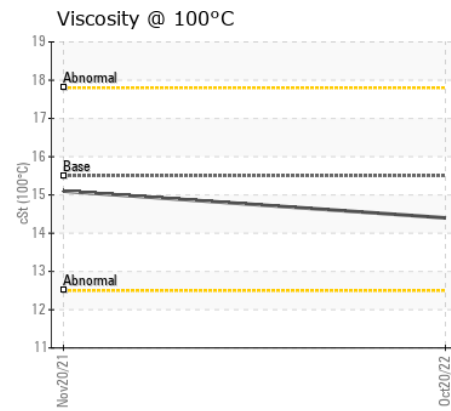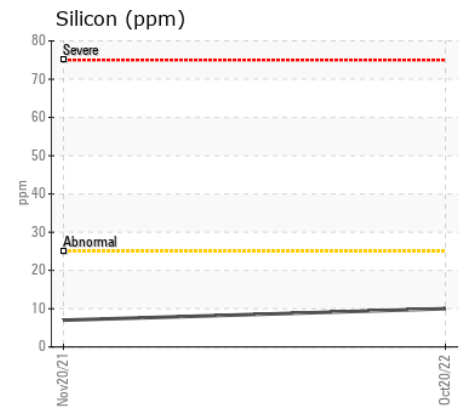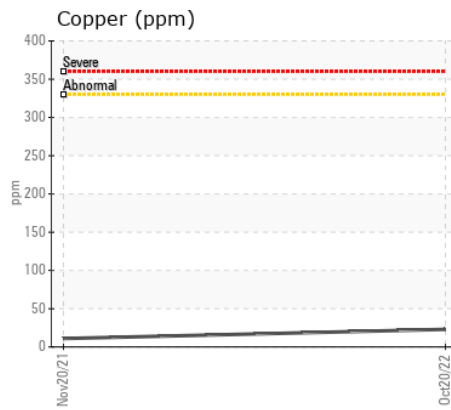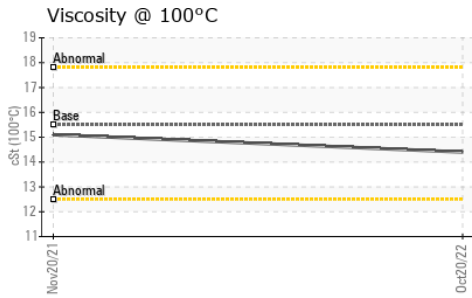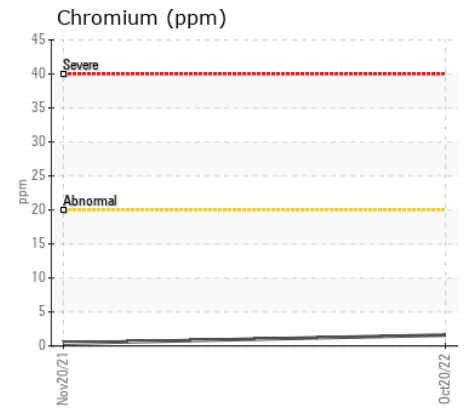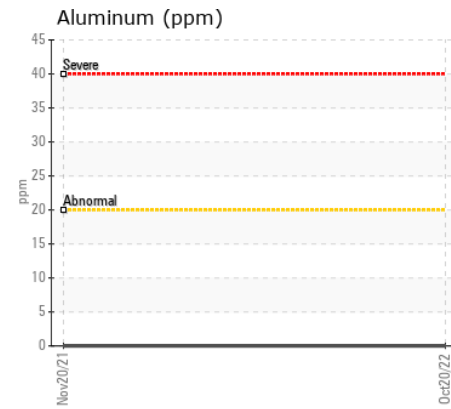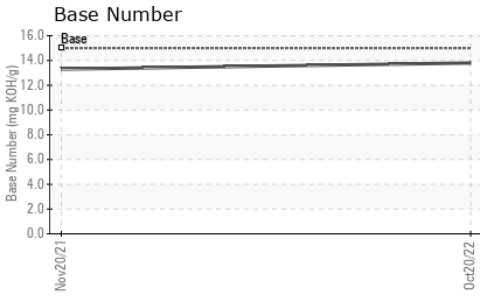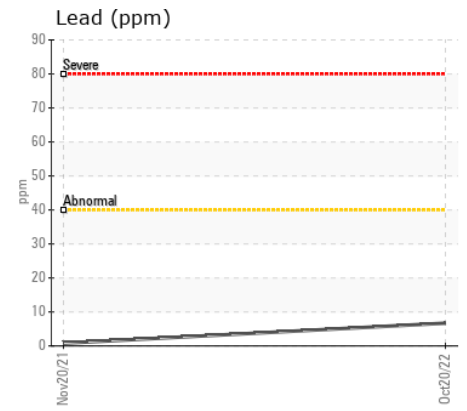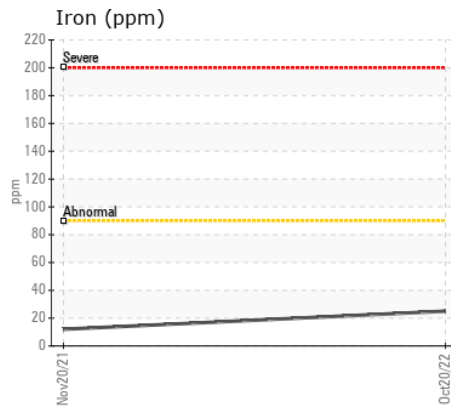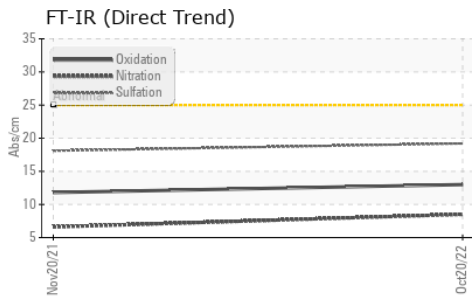

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : TR05699920
 Lab Number : 05699920
 Unique Number : 10229494
 Test Package : MOB 2

Received : 21 Nov 2022
 Tested : 22 Nov 2022
 Diagnosed : 23 Nov 2022 - Don Baldrige

STEPHEN MARTORELLA
 181 BUCKNAM ST
 EVERETT, MA
 US 02149

Contact: STEPHEN MARTORELLA
 17SGM17@GMAIL.COM

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: