



# VOLVO

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area  
**[X12545 RIGID]**  
Machine Id  
**VOLVO A25G 752414**  
Component  
**Front Axle**  
Fluid  
**VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VC547422</b>	---	---
Sample Date		Client Info		<b>08 Nov 2022</b>	---	---
Machine Age	hrs	Client Info		<b>580</b>	---	---
Oil Age	hrs	Client Info		<b>580</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	<b>280</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>5</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>30	<b>0</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>150	<b>20</b>	---	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>5</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

Confirm oil type. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Boron	ppm	ASTM D5185m	379	<b>250</b>	---	---
Barium	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m	0.8	<b>19</b>	---	---
Manganese	ppm	ASTM D5185m	0.0	<b>12</b>	---	---
Magnesium	ppm	ASTM D5185m	31	<b>1</b>	---	---
Calcium	ppm	ASTM D5185m	38	<b>699</b>	---	---
Phosphorus	ppm	ASTM D5185m	1077	<b>1302</b>	---	---
Zinc	ppm	ASTM D5185m	46	<b>297</b>	---	---
Sulfur	ppm	ASTM D5185m	23526	<b>22705</b>	---	---
Visc @ 40°C	cSt	ASTM D445	139	<b>94.9</b>	---	---

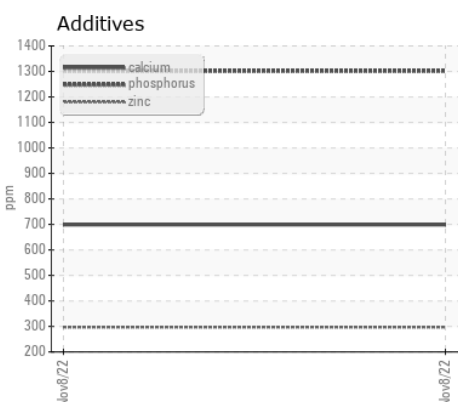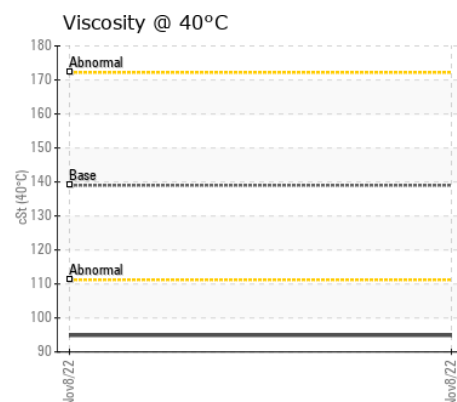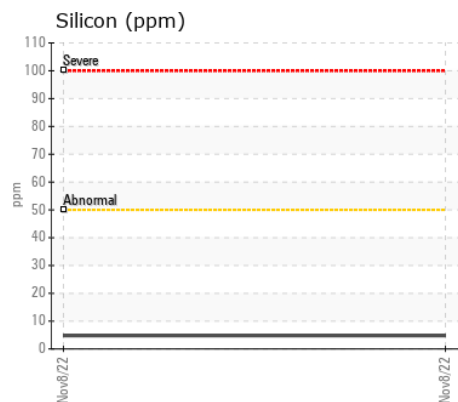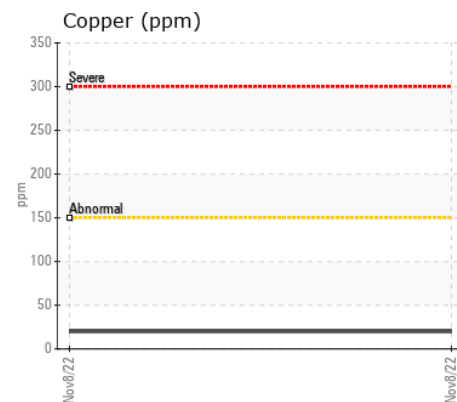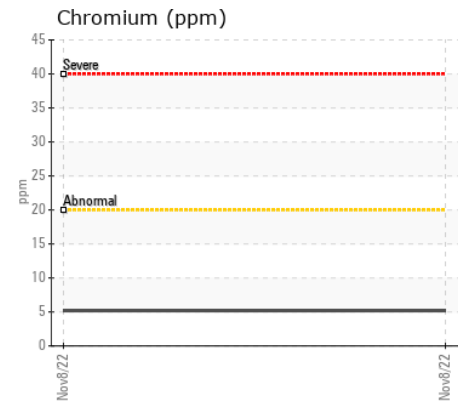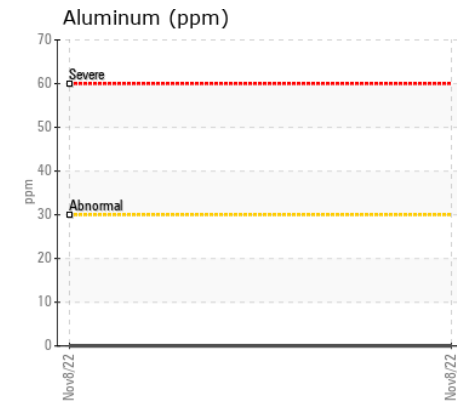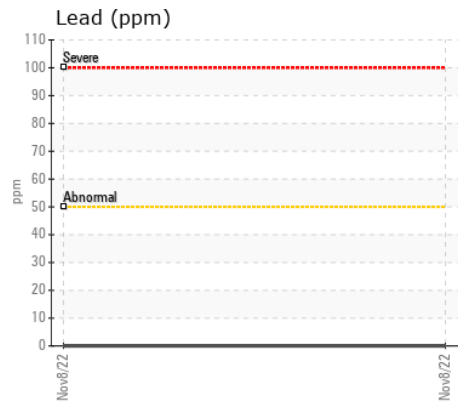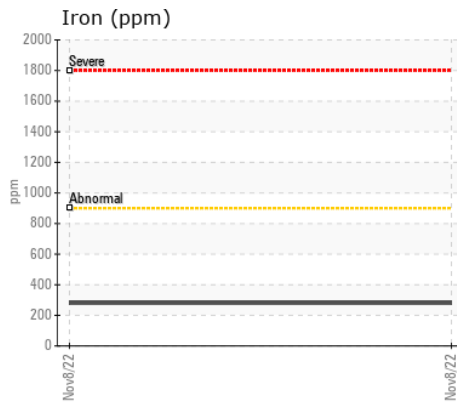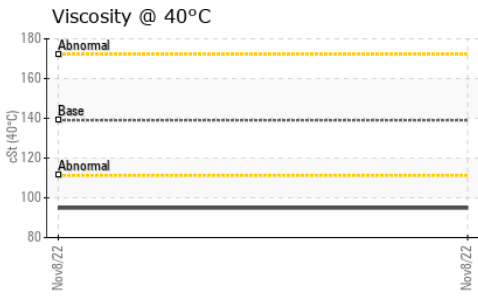

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VC547422  
**Lab Number** : 05699938  
**Unique Number** : 10229512  
**Test Package** : MOBCE

**Received** : 21 Nov 2022  
**Tested** : 23 Nov 2022  
**Diagnosed** : 23 Nov 2022 - Don Baldrige

**113 - ASCENDUM MACHINERY INC - GARNER**  
 3561 JONES SAUSAGE ROAD  
 GARNER, NC  
 US 27529  
 Contact: TRENT BROADWELL  
 trent.broadwell@ascendummachinery.com  
 T: (919)661-8817  
 F: (919)661-9038

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)