



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 3 - Norton
Machine Id
JOHN DEERE 350GL 1FF350GXJKF814116
Component
Diesel Engine
Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (7 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0038089	LEC0032070	---
Sample Date		Client Info		11 Jan 2023	03 Aug 2022	---
Machine Age	hrs	Client Info		923	457	---
Oil Age	hrs	Client Info		426	457	---
Filter Age	hrs	Client Info		426	0	---
Oil Changed		Client Info		Changed	Not Changed	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	69	111	---
Chromium	ppm	ASTM D5185m	>11	1	2	---
Nickel	ppm	ASTM D5185m	>5	5	13	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	<1	---
Aluminum	ppm	ASTM D5185m	>31	4	6	---
Lead	ppm	ASTM D5185m	>26	2	3	---
Copper	ppm	ASTM D5185m	>26	34	▲ 135	---
Tin	ppm	ASTM D5185m	>4	2	5	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	7	11	---
Potassium	ppm	ASTM D5185m	>20	3	14	---
Fuel	%	ASTM D3524	>5	<1.0	0.0	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.5	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	9.0	9.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.0	25.9	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	3	9	---
Boron	ppm	ASTM D5185m		187	229	---
Barium	ppm	ASTM D5185m		0	3	---
Molybdenum	ppm	ASTM D5185m		248	239	---
Manganese	ppm	ASTM D5185m		1	3	---
Magnesium	ppm	ASTM D5185m		787	736	---
Calcium	ppm	ASTM D5185m		1683	1435	---
Phosphorus	ppm	ASTM D5185m		897	790	---
Zinc	ppm	ASTM D5185m		1100	997	---
Sulfur	ppm	ASTM D5185m		3349	2842	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.9	21.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	9.0	9.3	---
Visc @ 100°C	cSt	ASTM D445	15.4	12.5	▲ 10.4	---

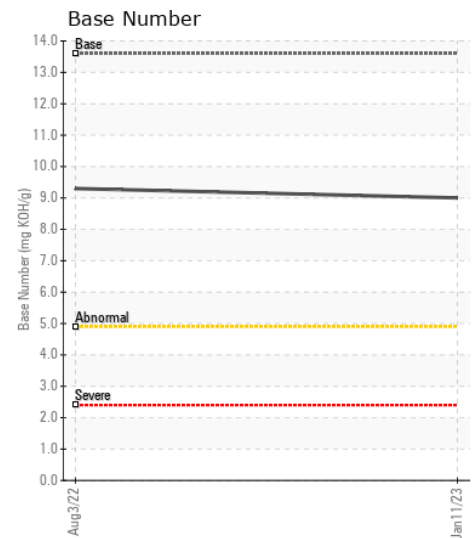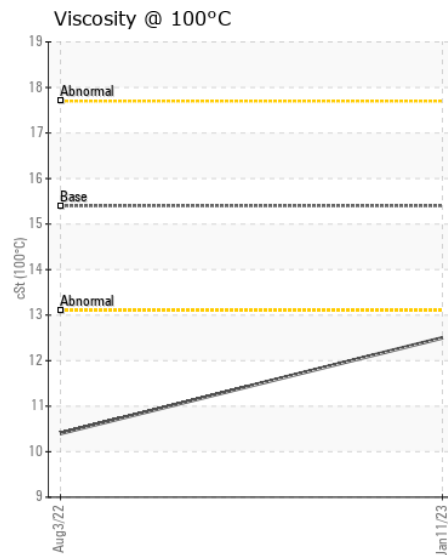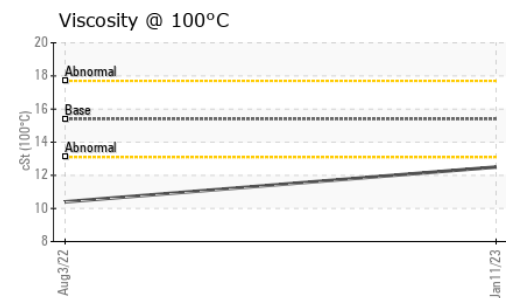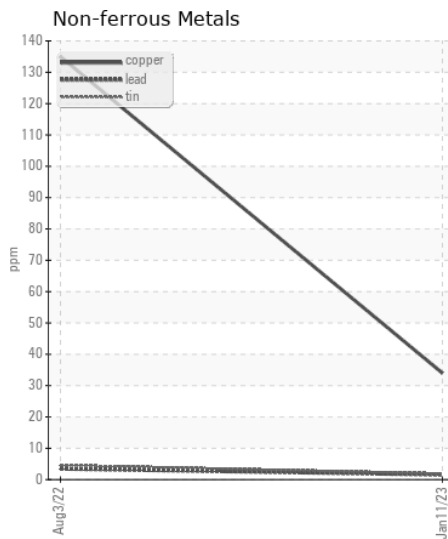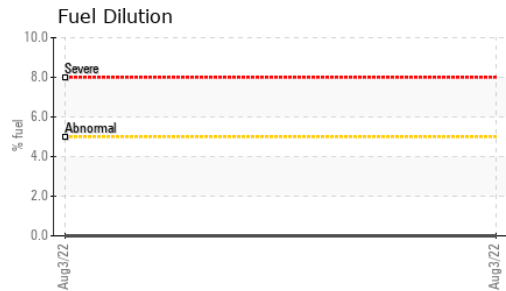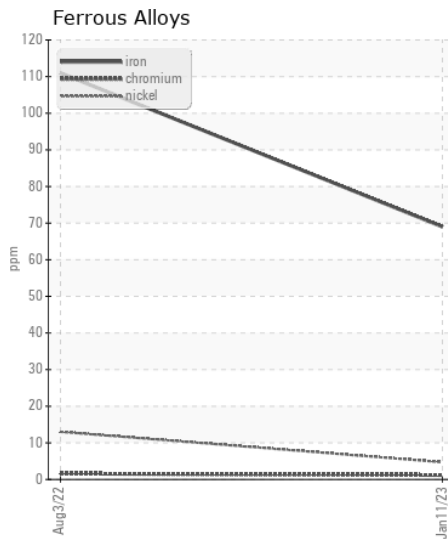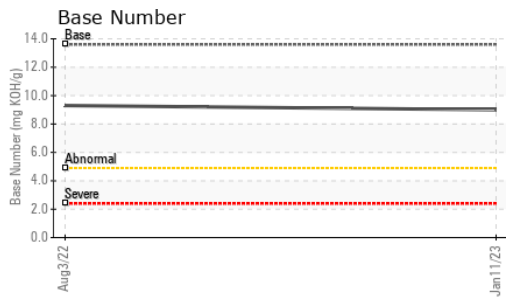

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0038089 **Received** : 13 Jan 2023
Lab Number : 05738295 **Diagnosed** : 16 Jan 2023
Unique Number : 10292894 **Diagnostician** : Sean Felton
Test Package : CONST (Additional Tests: FuelDilution, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570