



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
{unassigned}
Machine Id
JOHN DEERE 250GLC 1FF250GXCLF611600
Component
Pump Drive
Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (1 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0037940	LEC0026870	---
Sample Date		Client Info		19 Jan 2023	29 Nov 2021	---
Machine Age	hrs	Client Info		2336	745	---
Oil Age	hrs	Client Info		2336	745	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		None	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		17	24	---
Iron	ppm	ASTM D5185m	>151	53	56	---
Chromium	ppm	ASTM D5185m	>11	1	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>21	5	<1	---
Lead	ppm	ASTM D5185m	>51	<1	0	---
Copper	ppm	ASTM D5185m	>51	<1	1	---
Tin	ppm	ASTM D5185m	>4	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	17	10	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	3	---
Boron	ppm	ASTM D5185m		281	54	---
Barium	ppm	ASTM D5185m		11	0	---
Molybdenum	ppm	ASTM D5185m		244	101	---
Manganese	ppm	ASTM D5185m		1	2	---
Magnesium	ppm	ASTM D5185m		737	15	---
Calcium	ppm	ASTM D5185m		1533	3948	---
Phosphorus	ppm	ASTM D5185m		902	1144	---
Zinc	ppm	ASTM D5185m		1066	1137	---
Sulfur	ppm	ASTM D5185m		3538	6425	---
Visc @ 40°C	cSt	ASTM D445	117	68.3	64.7	---

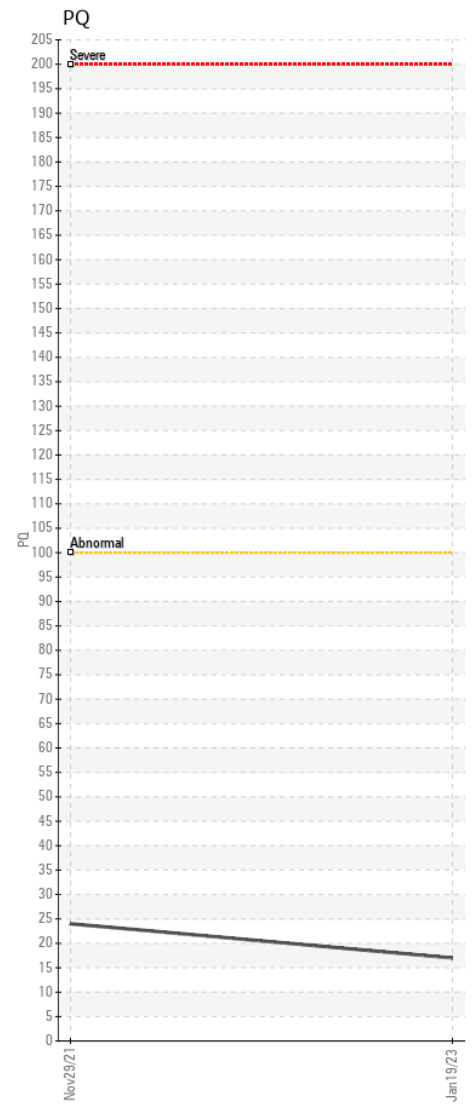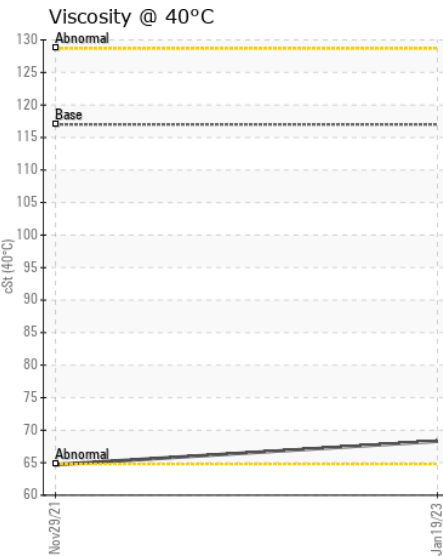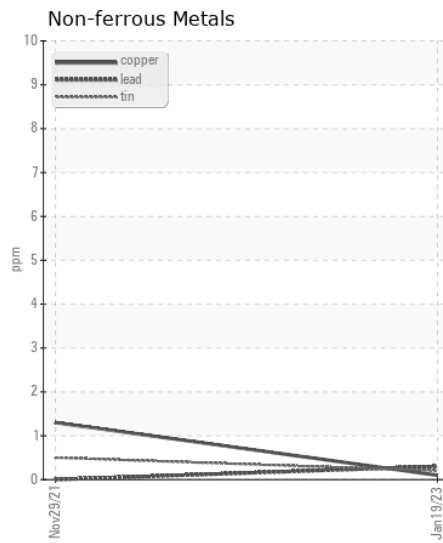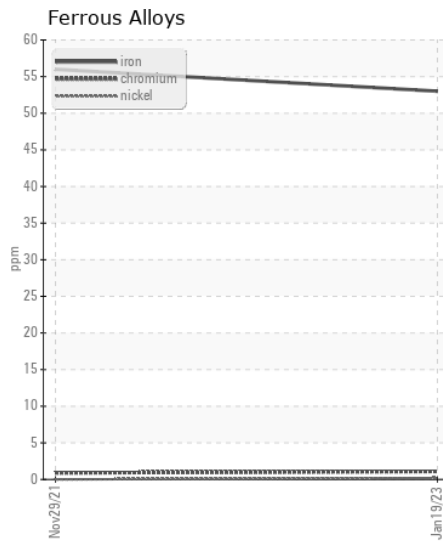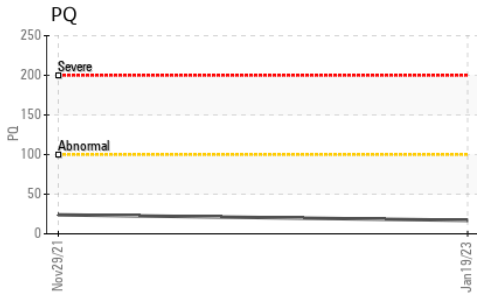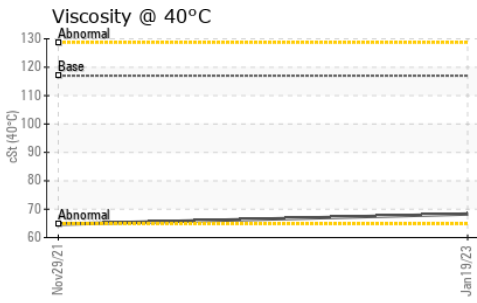

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0037940 **Received** : 24 Jan 2023
Lab Number : 05748293 **Tested** : 25 Jan 2023
Unique Number : 10307897 **Diagnosed** : 25 Jan 2023 - Jonathan Hester
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (740)373-5570