



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Machine Id
BELL B30E B93A631EP03009919
Component
Transmission
Fluid
MOBIL DELVAC SYNTHETIC ATF (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		BE0004310	---	---
Sample Date		Client Info		20 Jan 2023	---	---
Machine Age	hrs	Client Info		1855	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		25	---	---
Iron	ppm	ASTM D5185m	>200	63	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>50	20	---	---
Lead	ppm	ASTM D5185m	>50	10	---	---
Copper	ppm	ASTM D5185m	>200	6	---	---
Tin	ppm	ASTM D5185m	>10	4	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	LIGHT	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is a high amount of particulates present in the fluid.

Silicon	ppm	ASTM D5185m	>50	7	---	---
Potassium	ppm	ASTM D5185m	>20	8	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>10000	▲ 170311	---	---
Particles >6µm		ASTM D7647	>2500	▲ 43954	---	---
Particles >14µm		ASTM D7647	>320	▲ 1264	---	---
Particles >21µm		ASTM D7647	>80	▲ 202	---	---
Particles >38µm		ASTM D7647	>20	7	---	---
Particles >71µm		ASTM D7647	>4	0	---	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	▲ 25/23/17	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		10	---	---
Boron	ppm	ASTM D5185m		197	---	---
Barium	ppm	ASTM D5185m		3	---	---
Molybdenum	ppm	ASTM D5185m		1	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		4	---	---
Calcium	ppm	ASTM D5185m		162	---	---
Phosphorus	ppm	ASTM D5185m		431	---	---
Zinc	ppm	ASTM D5185m		10	---	---
Sulfur	ppm	ASTM D5185m		2903	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		2.40	---	---
Visc @ 40°C	cSt	ASTM D445	39	32.6	---	---

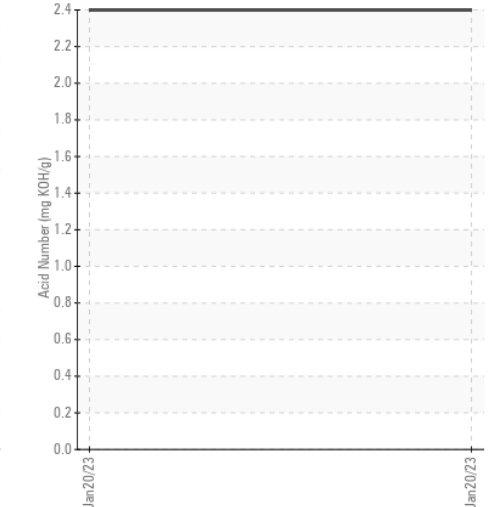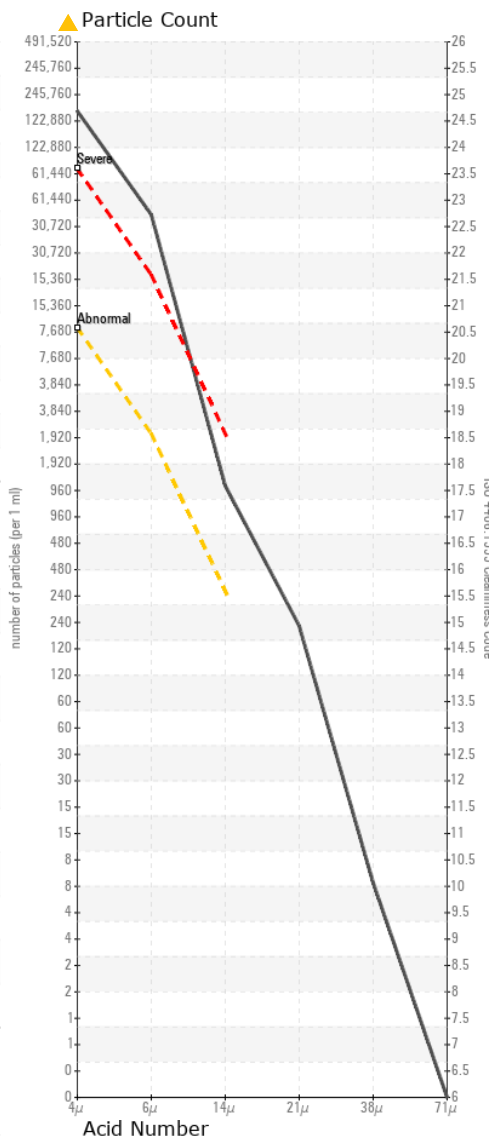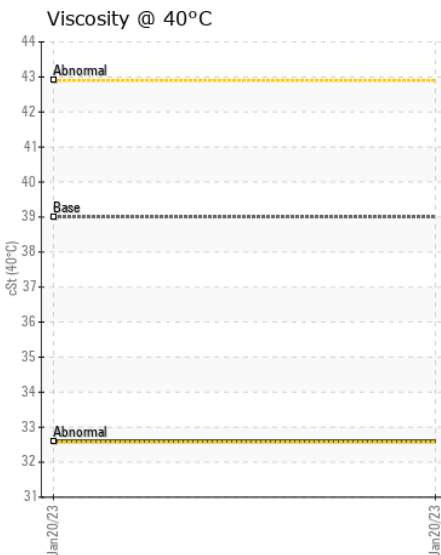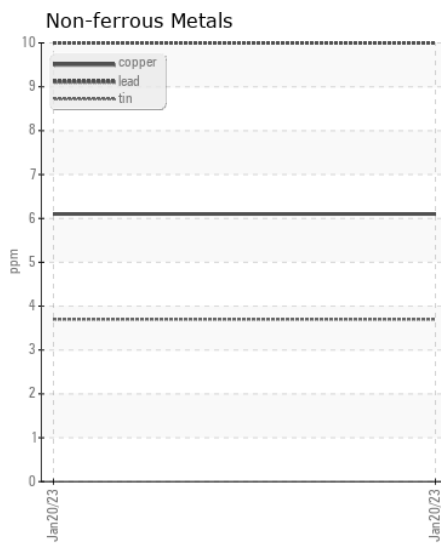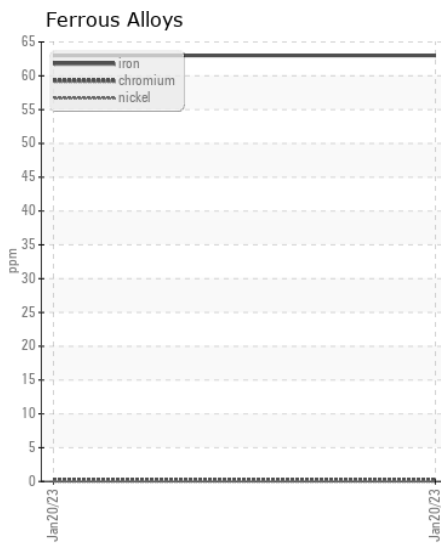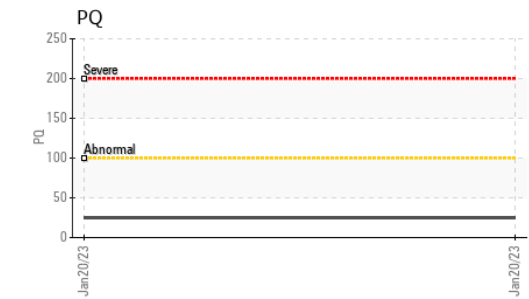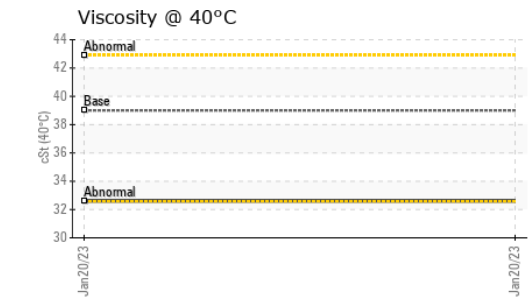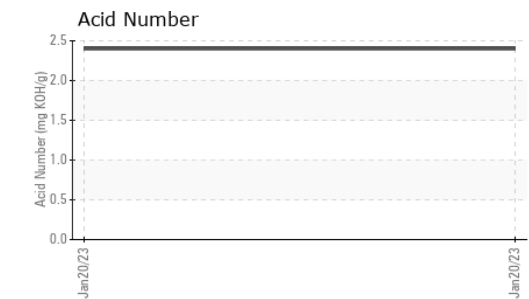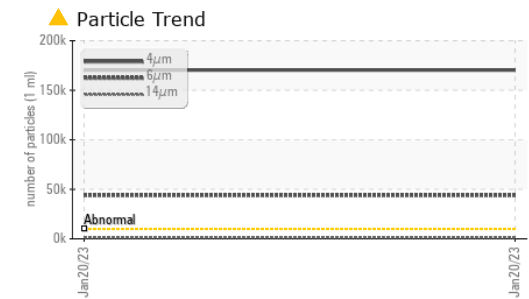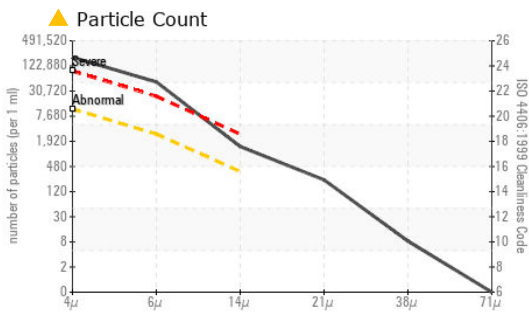

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : BE0004310 **Received** : 26 Jan 2023
Lab Number : 05750679 **Diagnosed** : 27 Jan 2023
Unique Number : 10310283 **Diagnostician** : Jonathan Hester
Test Package : MOBCE

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Taylor Machine Works
 132 Industrial Dr
 White House, TN
 US 37188

Contact: TIM GERBUS
 tgerbus@taylorbigred.com
 T: (615)392-4803

F: