



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
TK536

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0741564	WC0664398	---
Sample Date		Client Info		25 Jan 2023	14 Aug 2022	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	14	11	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	0	<1	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>75	2	2	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	1	<1	---
Potassium	ppm	ASTM D5185m	>20	1	0	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647	>5000	1090	1467	---
Particles >6µm		ASTM D7647	>1300	194	217	---
Particles >14µm		ASTM D7647	>160	22	23	---
Particles >21µm		ASTM D7647	>40	7	3	---
Particles >38µm		ASTM D7647	>10	2	0	---
Particles >71µm		ASTM D7647	>3	1	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/12	18/15/12	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	1	---
Boron	ppm	ASTM D5185m	5	0	<1	---
Barium	ppm	ASTM D5185m	5	1	0	---
Molybdenum	ppm	ASTM D5185m	5	0	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	25	3	1	---
Calcium	ppm	ASTM D5185m	200	71	64	---
Phosphorus	ppm	ASTM D5185m	300	379	376	---
Zinc	ppm	ASTM D5185m	370	344	331	---
Sulfur	ppm	ASTM D5185m	2500	3706	3746	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.47	0.31	---
Visc @ 40°C	cSt	ASTM D445	32	35.4	34.0	---
Visc @ 100°C	cSt	ASTM D445	5.4	6.4	6.6	---
Viscosity Index (VI)	Scale	ASTM D2270	102	133	153	---

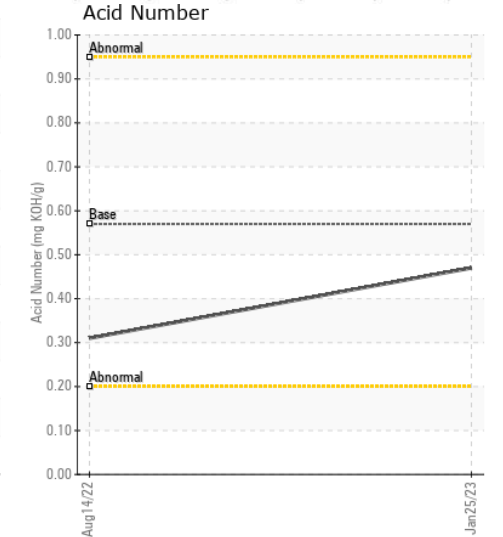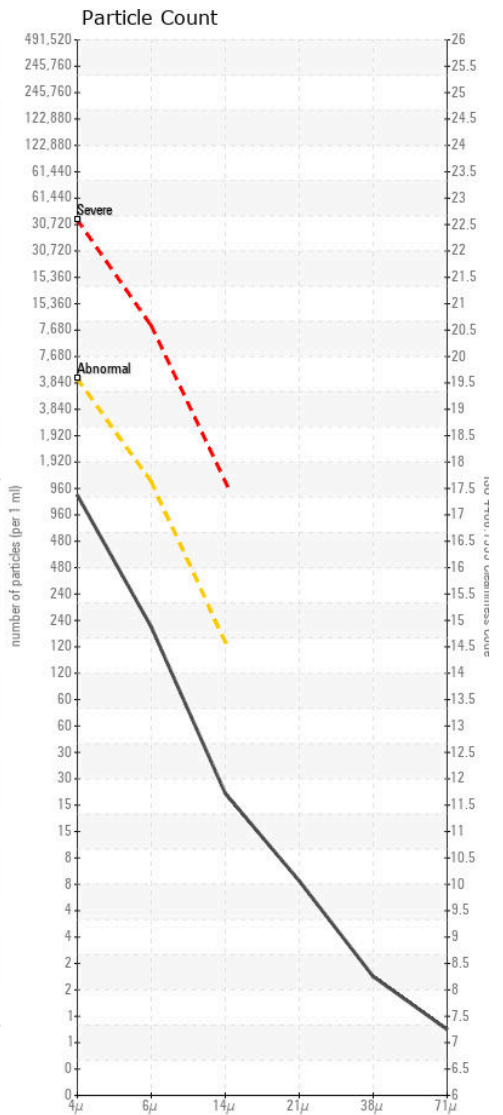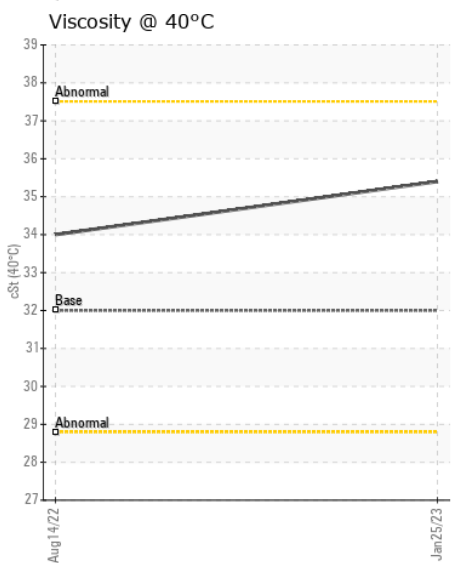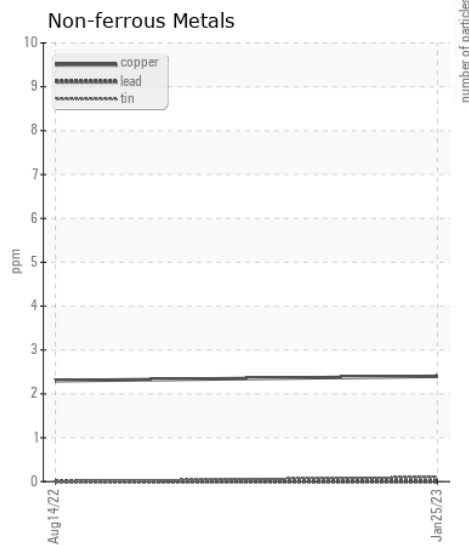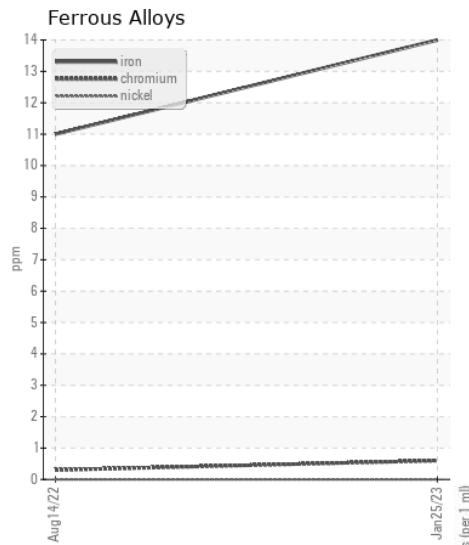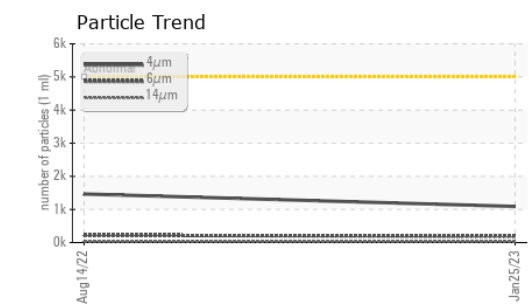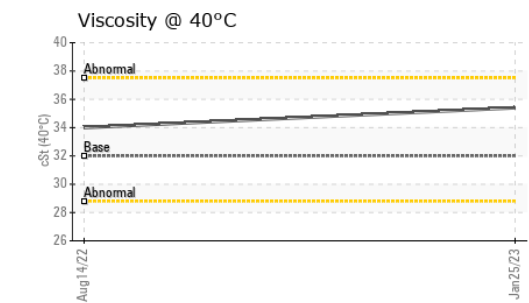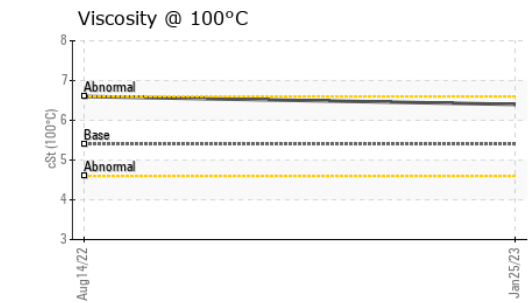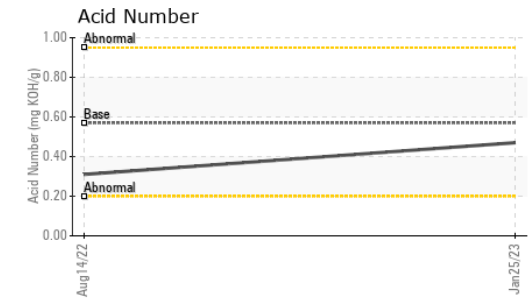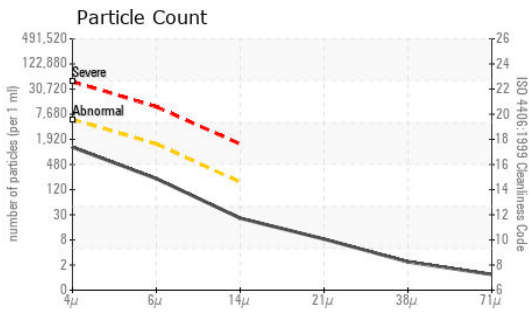

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0741564 **Received** : 26 Jan 2023
Lab Number : 05750806 **Diagnosed** : 27 Jan 2023
Unique Number : 10310410 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

HIAB USA - HAGERSTOWN
 148 WESTERN MARYLAND PKWY
 HAGERSTOWN, MD
 US 21740

Contact: CHUCK WISHARD
 CHUCK.WISHARD@HIAB.COM

T: (240)625-0045
 F: (301)797-7284