



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 35G 293202
 Component
Right Travel
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MT0005614	---	---
Sample Date		Client Info		14 Feb 2023	---	---
Machine Age	hrs	Client Info		502	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		36	---	---
Iron	ppm	ASTM D5185m	>500	104	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>100	1	---	---
Lead	ppm	ASTM D5185m	>10	<1	---	---
Copper	ppm	ASTM D5185m	>60	3	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	MODER	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>150	8	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

Confirm oil type. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	6	16	---	---
Barium	ppm	ASTM D5185m	0	4	---	---
Molybdenum	ppm	ASTM D5185m	0	17	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	145	14	---	---
Calcium	ppm	ASTM D5185m	3570	3894	---	---
Phosphorus	ppm	ASTM D5185m	1290	598	---	---
Zinc	ppm	ASTM D5185m	1640	741	---	---
Sulfur	ppm	ASTM D5185m		2497	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	92.5	---	---

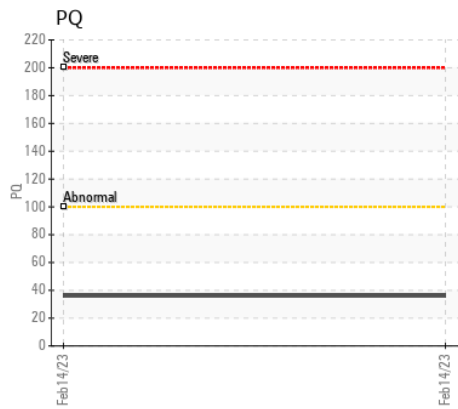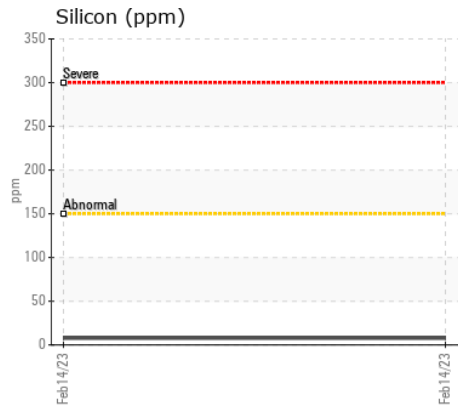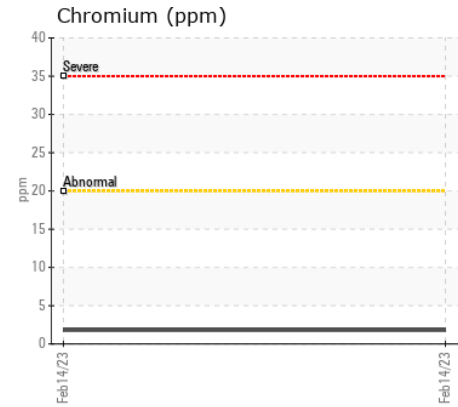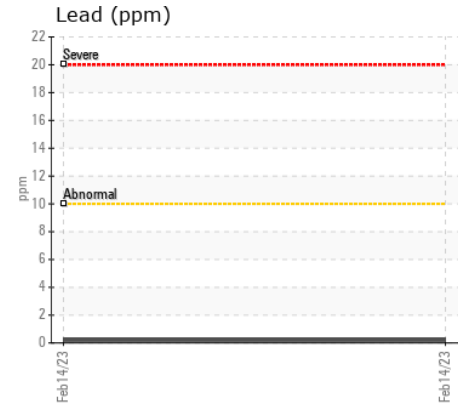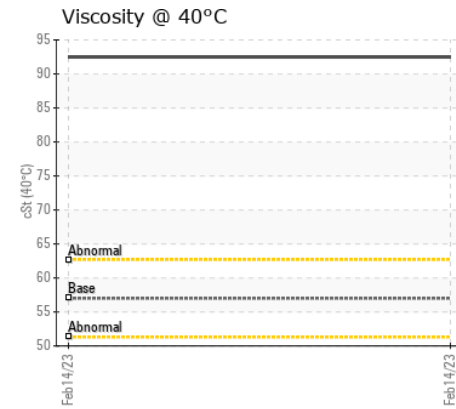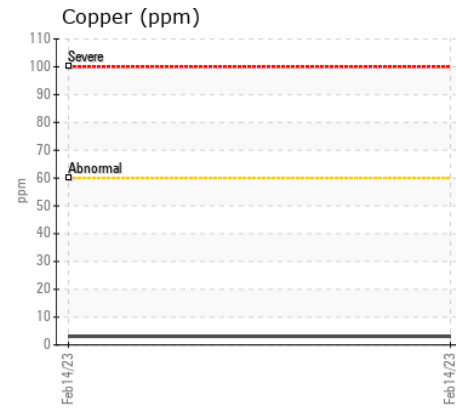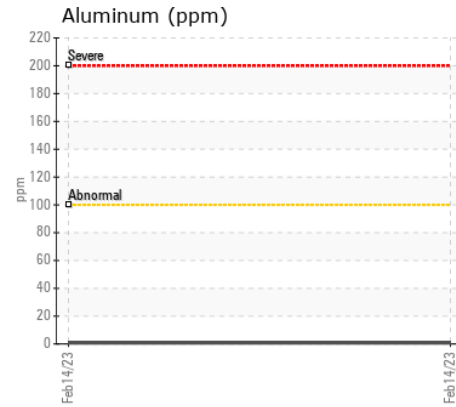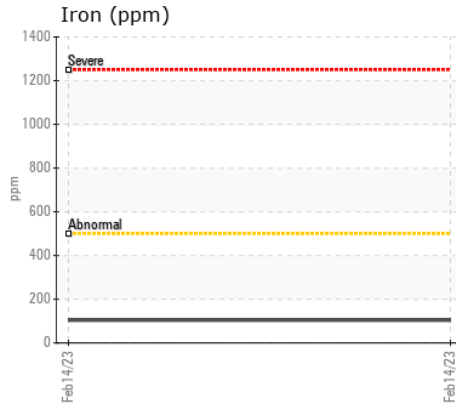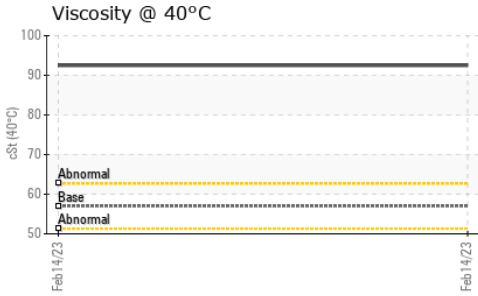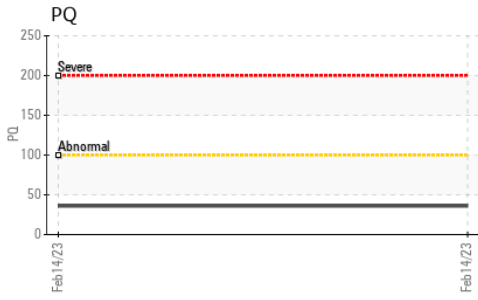

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MT0005614 **Received** : 21 Feb 2023
Lab Number : 05773078 **Diagnosed** : 22 Feb 2023
Unique Number : 10347695 **Diagnostician** : Don Baldrige
Test Package : MOBCE (Additional Tests: PQ)

MURPHY TRACTOR - CAMBRIDGE
 60611 HULSE DRIVE
 CAMBRIDGE, OH
 US 43725
 Contact: DUSTIN DAILEY
 DDAILEY@MURPHYTRACTOR.COM
 T:
 F: (740)439-2325

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)