



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**MASSEY FERGUSEN MASSEY FERGUSEN 85-265**  
 Component  
**Diesel Engine**  
 Fluid  
**DURALENE Dura-Max 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0020482</b>	DC0021199	---
Sample Date		Client Info		<b>06 Jan 2023</b>	04 Nov 2022	---
Machine Age	hrs	Client Info		<b>1289</b>	671	---
Oil Age	hrs	Client Info		<b>618</b>	0	---
Filter Age	hrs	Client Info		<b>618</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>13</b>	27	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	3	---
Lead	ppm	ASTM D5185m	>40	<b>9</b>	15	---
Copper	ppm	ASTM D5185m	>330	<b>2</b>	8	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	4	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	26	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.4</b>	9.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.0</b>	20.5	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	4	---
Boron	ppm	ASTM D5185m		<b>11</b>	81	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>60</b>	65	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	---
Magnesium	ppm	ASTM D5185m		<b>920</b>	1081	---
Calcium	ppm	ASTM D5185m		<b>1342</b>	1180	---
Phosphorus	ppm	ASTM D5185m		<b>1041</b>	1041	---
Zinc	ppm	ASTM D5185m		<b>1270</b>	1406	---
Sulfur	ppm	ASTM D5185m		<b>3755</b>	3848	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.5</b>	18.8	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>9.2</b>	8.7	---
Visc @ 100°C	cSt	ASTM D445		<b>13.3</b>	12.7	---

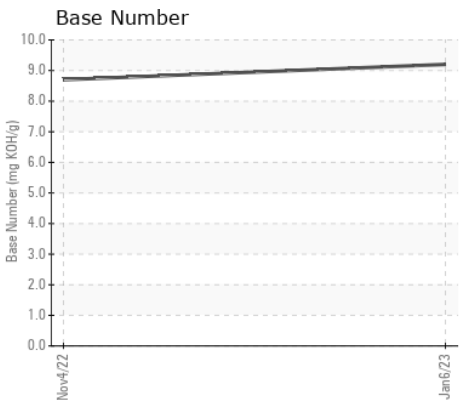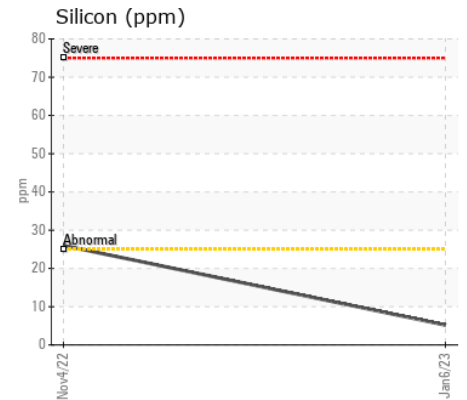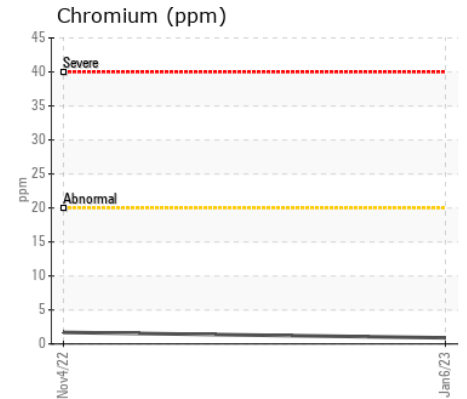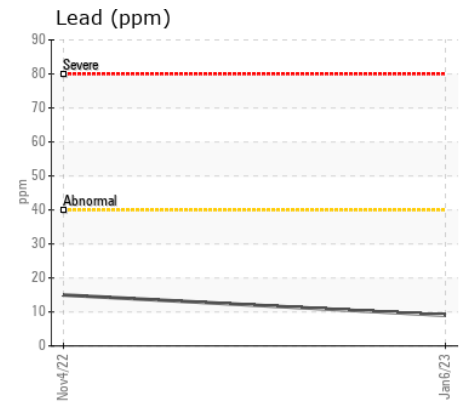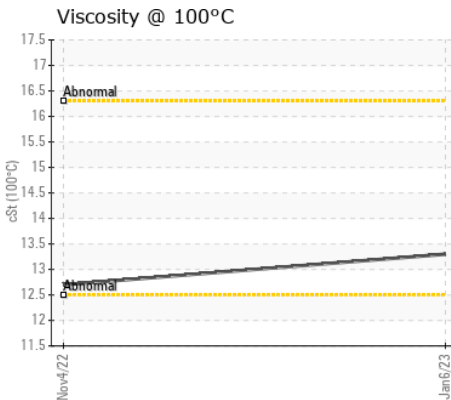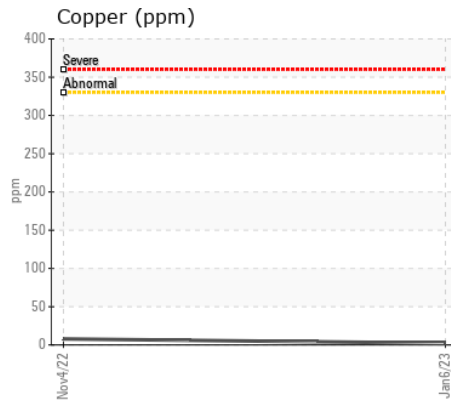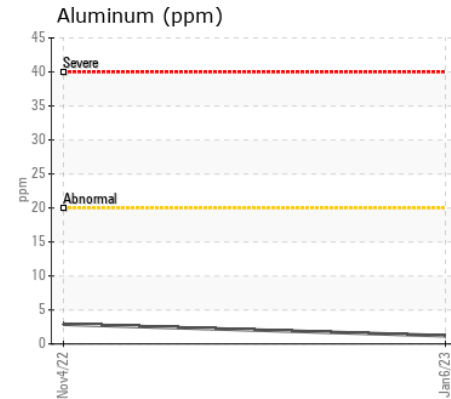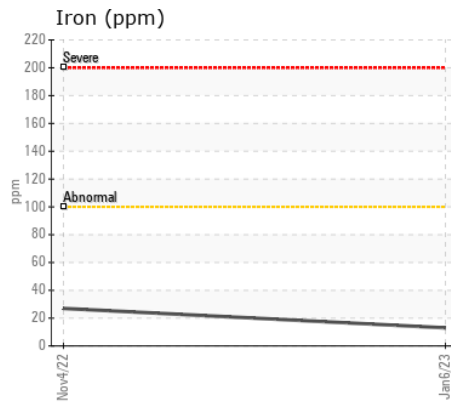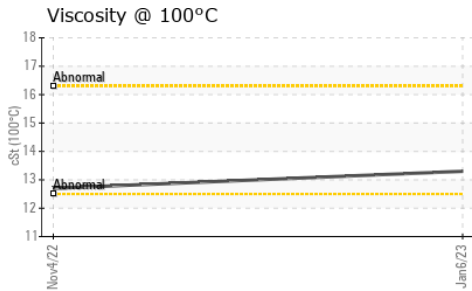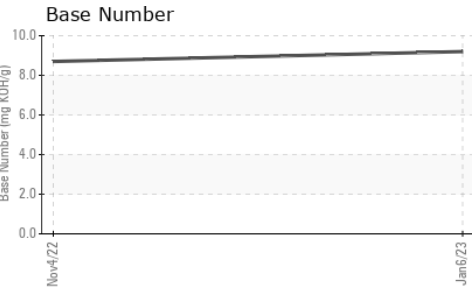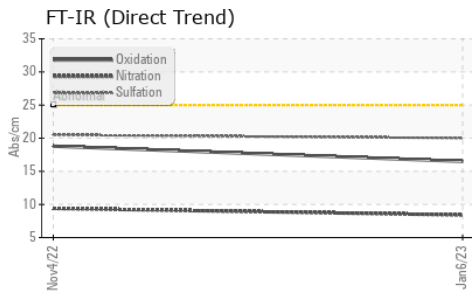

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0020482 **Received** : 03 Mar 2023  
**Lab Number** : 05782976 **Tested** : 06 Mar 2023  
**Unique Number** : 10362646 **Diagnosed** : 06 Mar 2023 - Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**MERCER VU FARMS**  
 12275 MT PLEASANT RD  
 MERCERSBURG, PA  
 US 17236  
 Contact: RYAN LEASURE  
 ryanleasure@yahoo.com  
 T: (717)404-5913  
 F: