



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ATTENTION

Machine Id  
**MOFFETT U400258B**

Component  
**Hydraulic System**

Fluid  
**AW HYDRAULIC OIL ISO 68 (--- GAL)**

**RECOMMENDATION**

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0716945	---	---
Sample Date		Client Info		08 Mar 2023	---	---
Machine Age	hrs	Client Info		242	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ABNORMAL	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	18	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	<1	---	---
Lead	ppm	ASTM D5185m	>10	3	---	---
Copper	ppm	ASTM D5185m	>75	4	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

**CONTAMINATION**











There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	2	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 128760	---	---
Particles >6µm		ASTM D7647	>1300	▲ 23679	---	---
Particles >14µm		ASTM D7647	>160	43	---	---
Particles >21µm		ASTM D7647	>40	5	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 24/22/13	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

**FLUID CONDITION**

The oil viscosity is lower than normal. Confirm oil type. The AN level is acceptable for this fluid.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	5	0	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	5	<1	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	25	3	---	---
Calcium	ppm	ASTM D5185m	200	41	---	---
Phosphorus	ppm	ASTM D5185m	300	210	---	---
Zinc	ppm	ASTM D5185m	370	288	---	---
Sulfur	ppm	ASTM D5185m	2500	5136	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.34	---	---
Visc @ 40°C	cSt	ASTM D445	68	▲ 39.9	---	---
Visc @ 100°C	cSt	ASTM D445	8.6	7.4	---	---
Viscosity Index (VI)	Scale	ASTM D2270	96	153	---	---

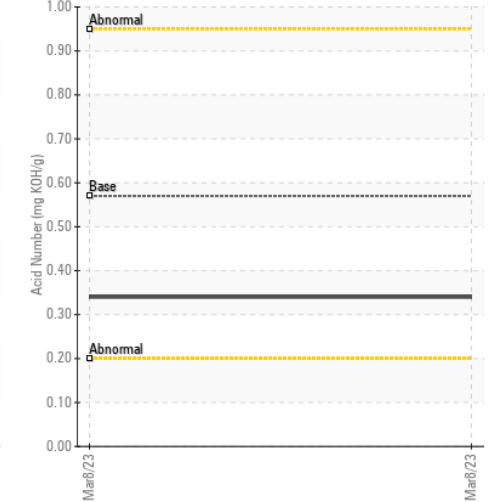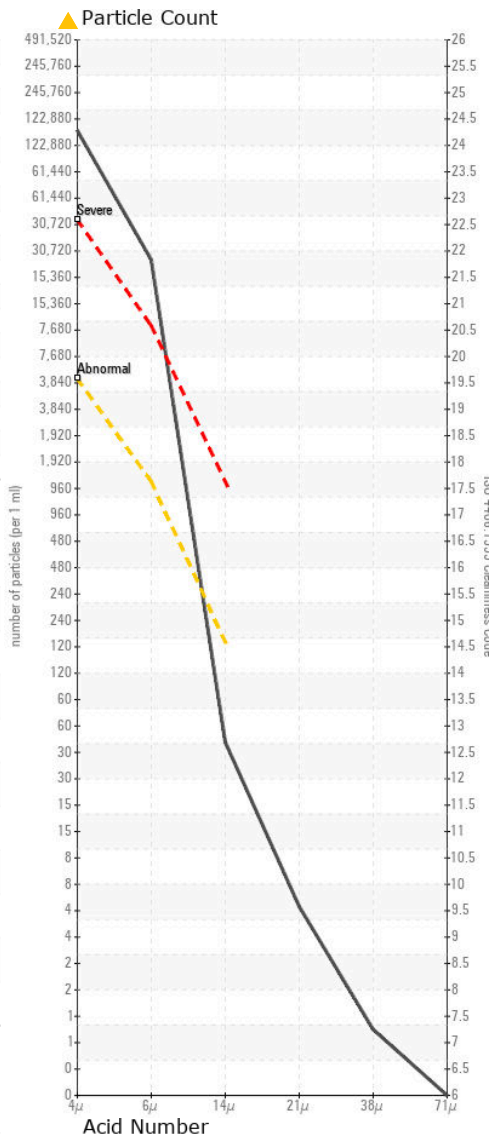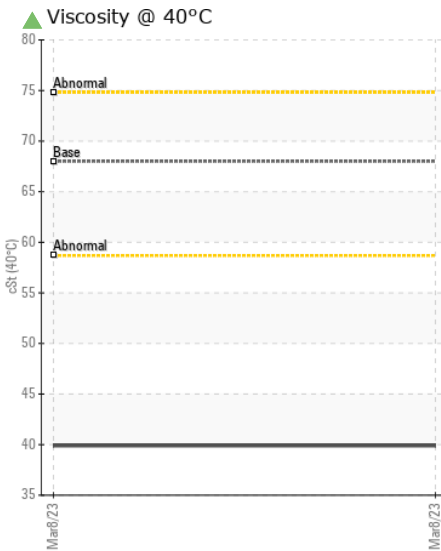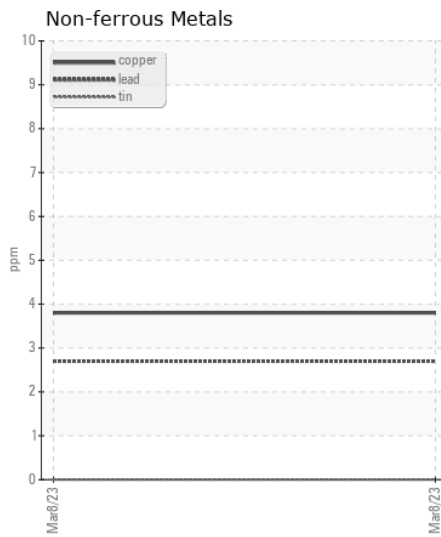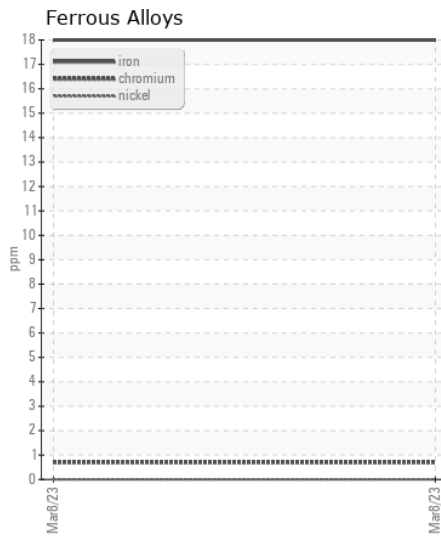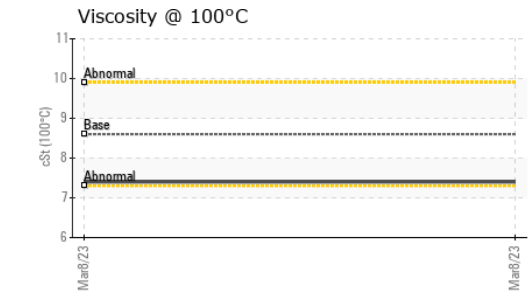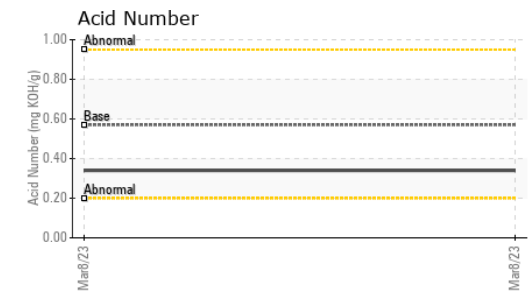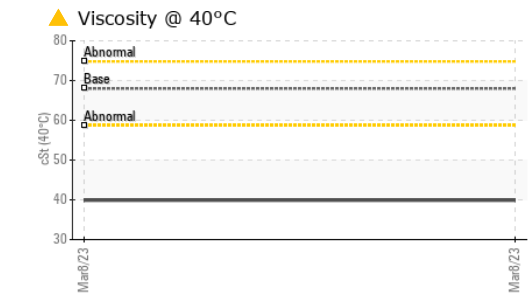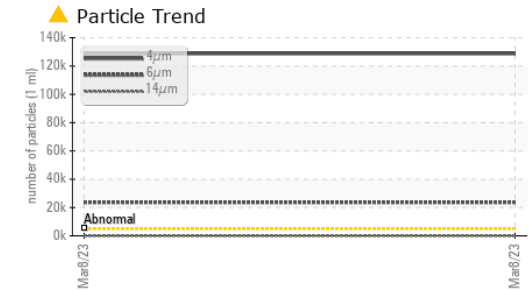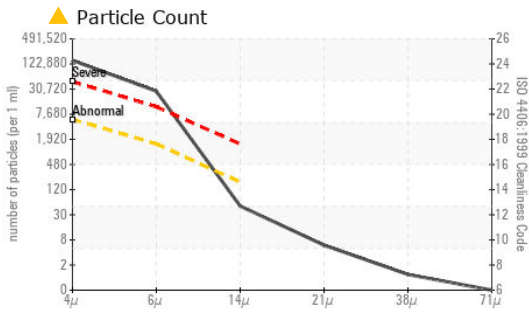

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0716945 **Received** : 09 Mar 2023  
**Lab Number** : 05787915 **Diagnosed** : 10 Mar 2023  
**Unique Number** : 10372586 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: KV100, VI )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**HIAB USA - SOUTHWEST**  
 3600 VALLEY VISTA DR  
 HURST, TX  
 US 76053  
 Contact: BEN PROFFITT  
 ben.proffitt@hiab.com  
 T: (972)506-9664  
 F: (972)506-9674