



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**MOFFETT U400258B**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 5W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0735089	---	---
Sample Date		Client Info		08 Mar 2023	---	---
Machine Age	hrs	Client Info		242	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	2	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	<1	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.8	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.3	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>44	2	---	---
Boron	ppm	ASTM D5185m	250	79	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	100	77	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m	450	65	---	---
Calcium	ppm	ASTM D5185m	3000	2174	---	---
Phosphorus	ppm	ASTM D5185m	1150	1036	---	---
Zinc	ppm	ASTM D5185m	1350	1287	---	---
Sulfur	ppm	ASTM D5185m	4250	4255	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.88	---	---
Visc @ 40°C	cSt	ASTM D445	91	96.8	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	---	---
Viscosity Index (VI)	Scale	ASTM D2270	164	144	---	---

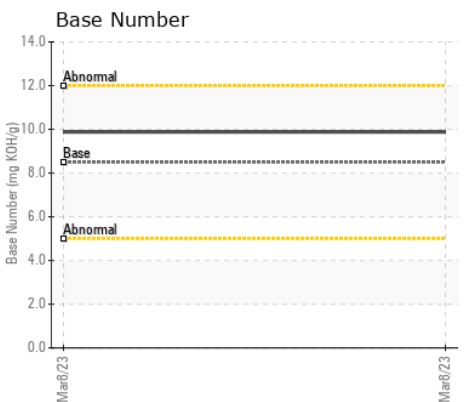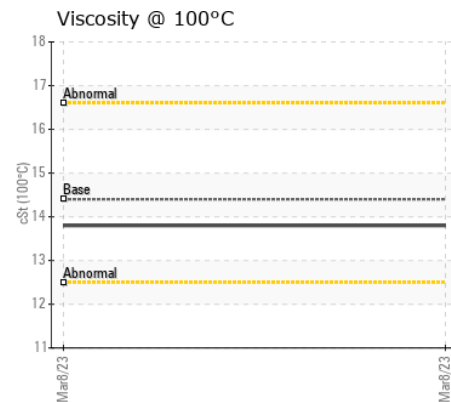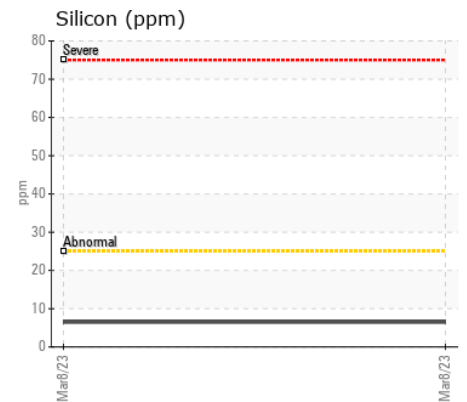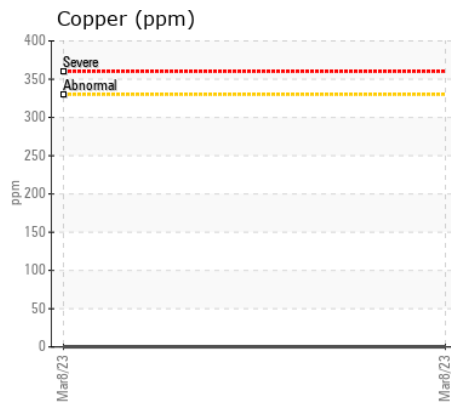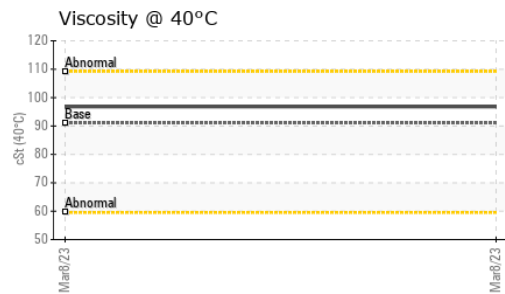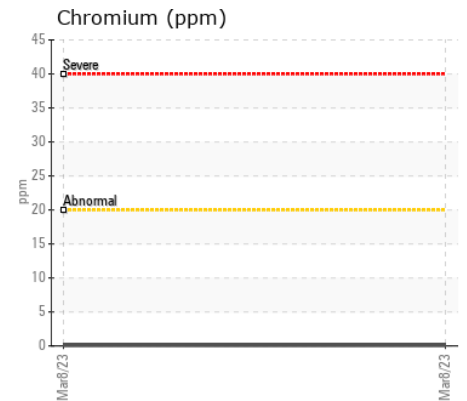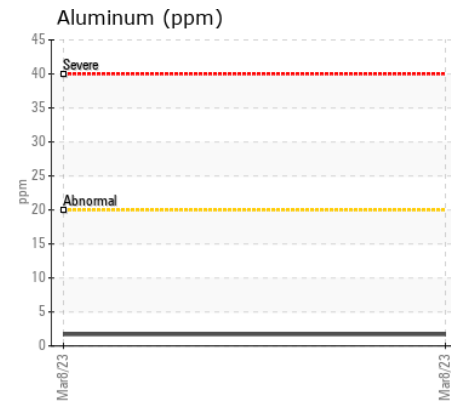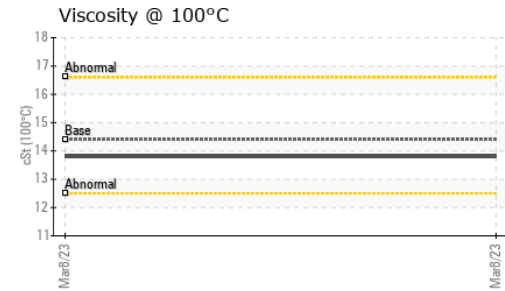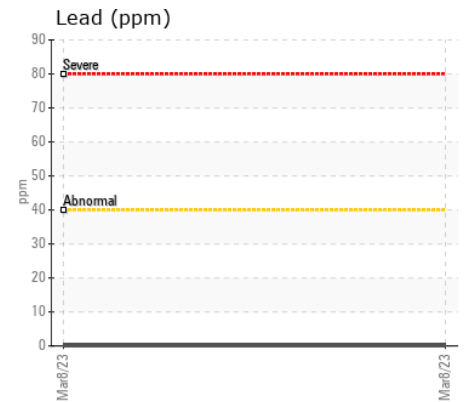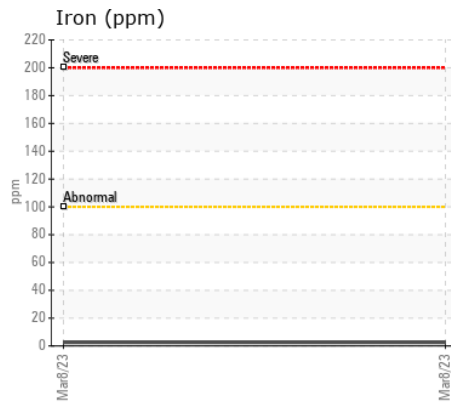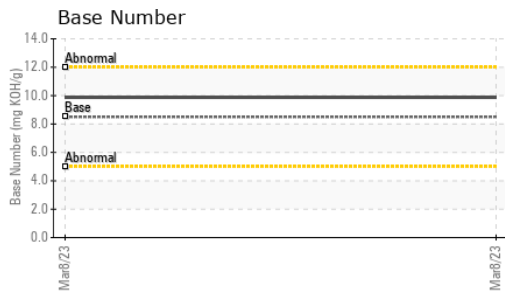

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0735089 **Received** : 09 Mar 2023  
**Lab Number** : 05788084 **Diagnosed** : 10 Mar 2023  
**Unique Number** : 10372755 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KV40, VI )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**HIAB USA - SOUTHWEST**  
 3600 VALLEY VISTA DR  
 HURST, TX  
 US 76053  
 Contact: BEN PROFFITT  
 ben.proffitt@hiab.com  
 T: (972)506-9664  
 F: (972)506-9674