



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 2 - Beaver [RO#137049]
Machine Id
JOHN DEERE 260E 1DW260ETVLF704853
Component
Hydraulic System
Fluid
JOHN DEERE HYDRAU (30 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0039345	LEC0027827	LEC0023263
Sample Date		Client Info		06 Mar 2023	02 Mar 2022	29 Oct 2021
Machine Age	hrs	Client Info		2060	1537	1090
Oil Age	hrs	Client Info		2060	1537	1090
Filter Age	hrs	Client Info		2060	1537	1090
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	16	12	19
Iron	ppm	ASTM D5185m	>71	9	0	4
Chromium	ppm	ASTM D5185m	>11	4	3	1
Nickel	ppm	ASTM D5185m	>6	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	<1
Aluminum	ppm	ASTM D5185m	>11	4	3	0
Lead	ppm	ASTM D5185m	>13	0	<1	<1
Copper	ppm	ASTM D5185m	>21	2	2	1
Tin	ppm	ASTM D5185m	>5	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>24	6	5	3
Potassium	ppm	ASTM D5185m	>20	2	3	1
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	38127	55672	6630
Particles >6µm		ASTM D7647	>5000	326	1488	168
Particles >14µm		ASTM D7647	>640	27	33	23
Particles >21µm		ASTM D7647	>160	7	6	4
Particles >38µm		ASTM D7647	>40	0	0	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/19/16	22/16/12	23/18/12	20/15/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	1	0	0
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		<1	2	2
Calcium	ppm	ASTM D5185m	87	96	90	91
Phosphorus	ppm	ASTM D5185m	727	583	597	604
Zinc	ppm	ASTM D5185m	900	819	824	772
Sulfur	ppm	ASTM D5185m	1500	1599	1360	1409
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.60	0.64	0.742
Visc @ 40°C	cSt	ASTM D445	65	58.6	60.1	60.8

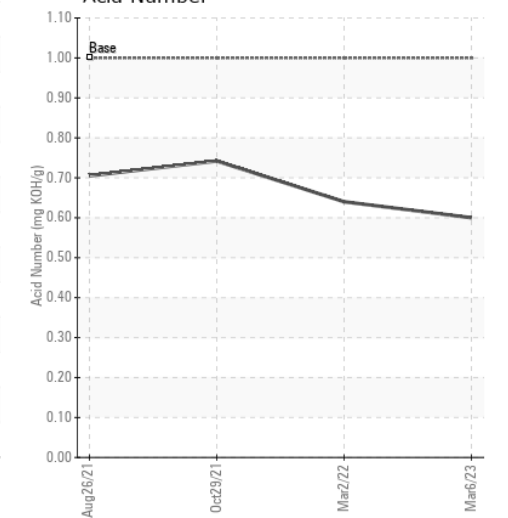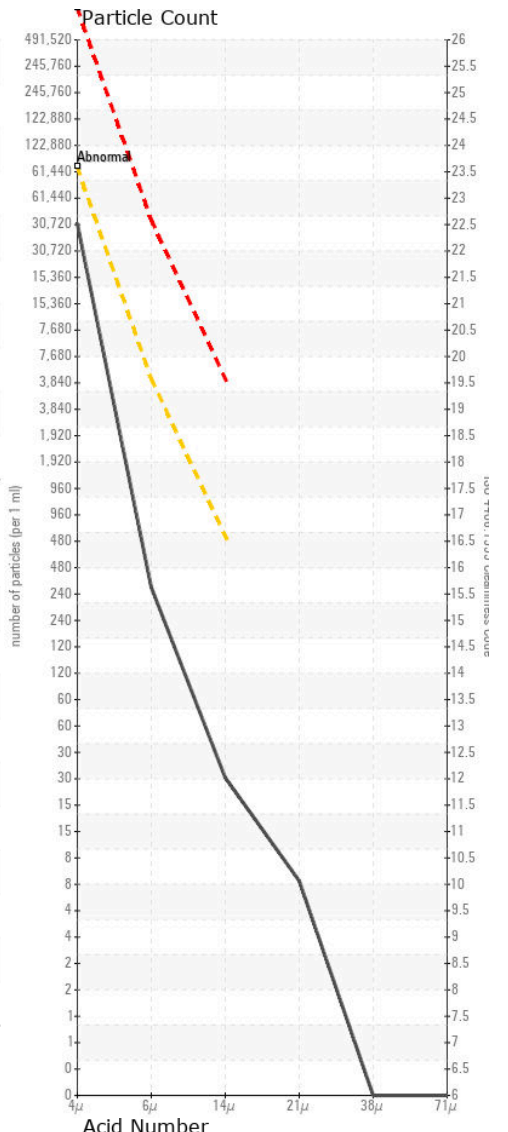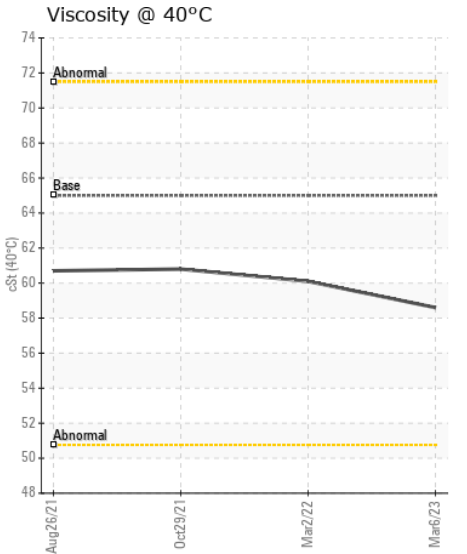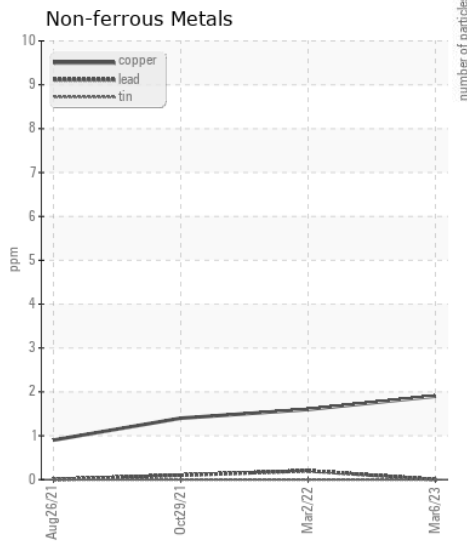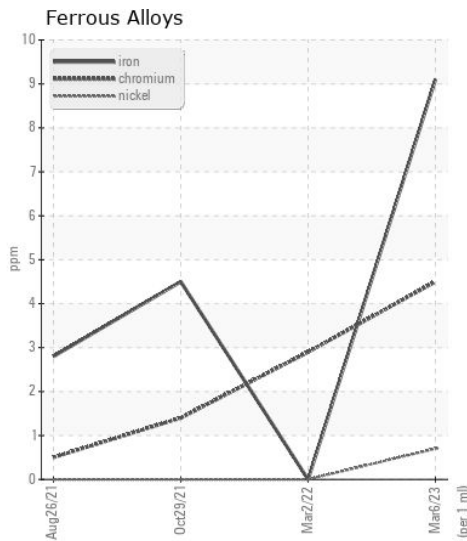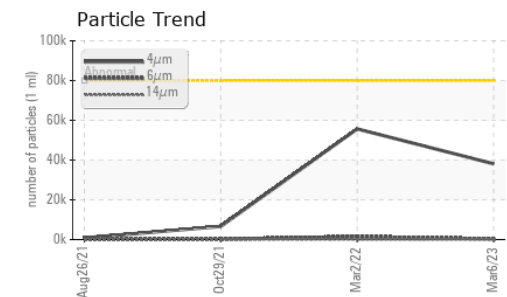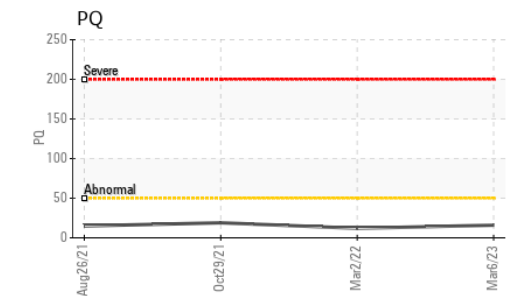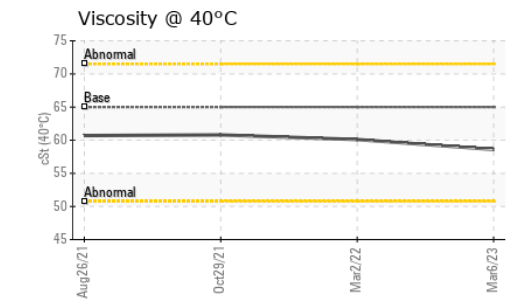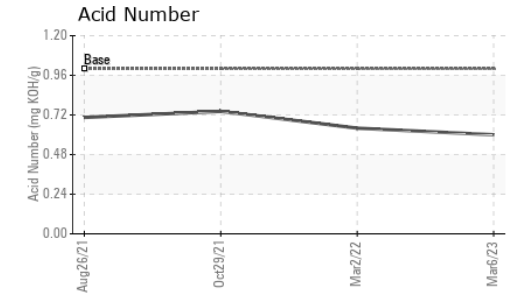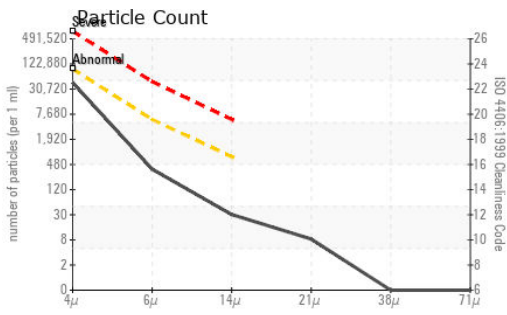

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0039345 **Received** : 10 Mar 2023
Lab Number : 05788482 **Tested** : 13 Mar 2023
Unique Number : 10373153 **Diagnosed** : 13 Mar 2023 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)