



OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
M02134
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | DC0023089 | --- | --- |
| Sample Date | | Client Info | | 03 Mar 2023 | --- | --- |
| Machine Age | mls | Client Info | | 4140 | --- | --- |
| Oil Age | mls | Client Info | | 0 | --- | --- |
| Filter Age | mls | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | Changed | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

Metal levels are typical for a new component breaking in.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-----|-----|
| Iron | ppm | ASTM D5185m | >100 | 76 | --- | --- |
| Chromium | ppm | ASTM D5185m | >20 | 4 | --- | --- |
| Nickel | ppm | ASTM D5185m | >4 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | >3 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 7 | --- | --- |
| Lead | ppm | ASTM D5185m | >40 | <1 | --- | --- |
| Copper | ppm | ASTM D5185m | >330 | 4 | --- | --- |
| Tin | ppm | ASTM D5185m | >15 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION












Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >25 | 10 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 11 | --- | --- |
| Fuel | | WC Method | >5 | <1.0 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Glycol | | WC Method | | NEG | --- | --- |
| Soot % | % | *ASTM D7844 | >3 | 0.5 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 7.7 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 17.6 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|-----|-----|
| Sodium | ppm | ASTM D5185m | >158 | 2 | --- | --- |
| Boron | ppm | ASTM D5185m | 250 | 9 | --- | --- |
| Barium | ppm | ASTM D5185m | 10 | 3 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 100 | 8 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 3 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 450 | 105 | --- | --- |
| Calcium | ppm | ASTM D5185m | 3000 | 2099 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 1150 | 805 | --- | --- |
| Zinc | ppm | ASTM D5185m | 1350 | 1024 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 4250 | 4031 | --- | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 10.7 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 8.5 | 7.7 | --- | --- |
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | 13.4 | --- | --- |

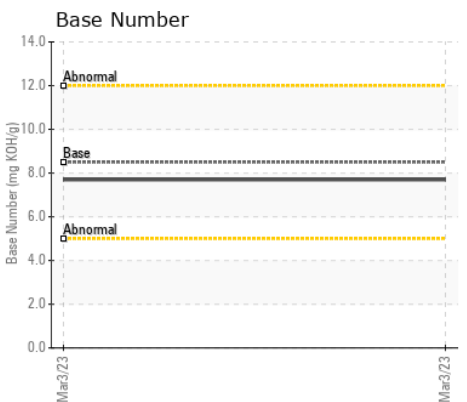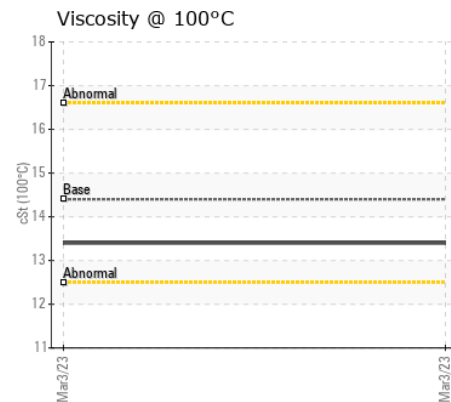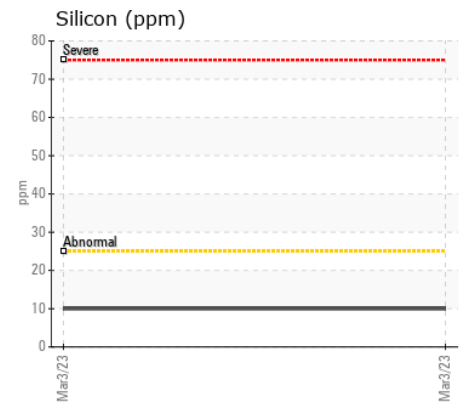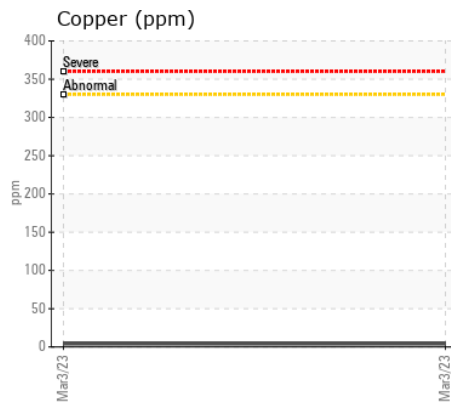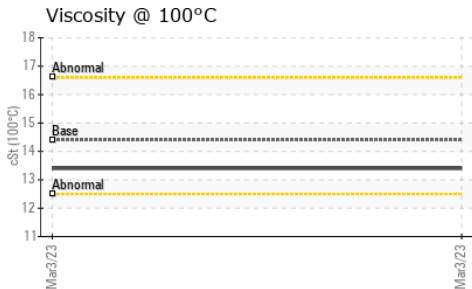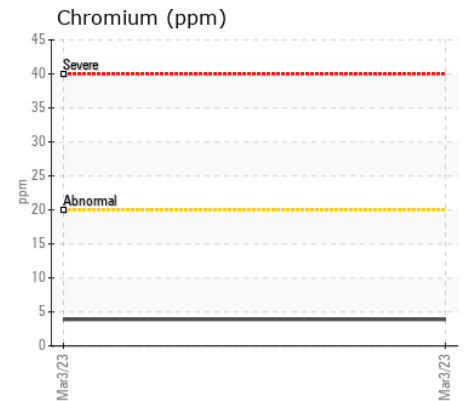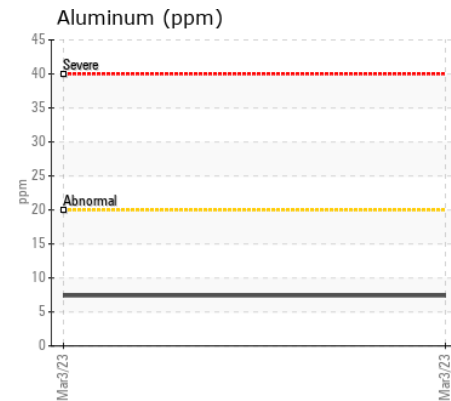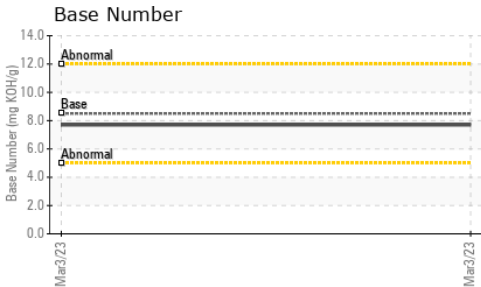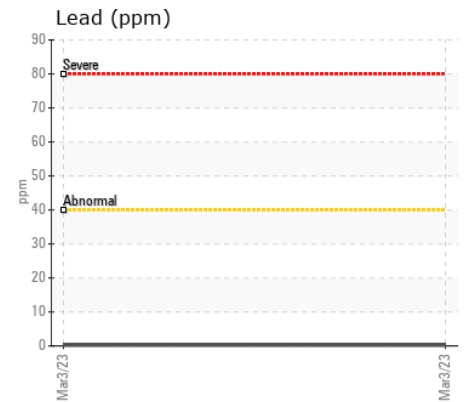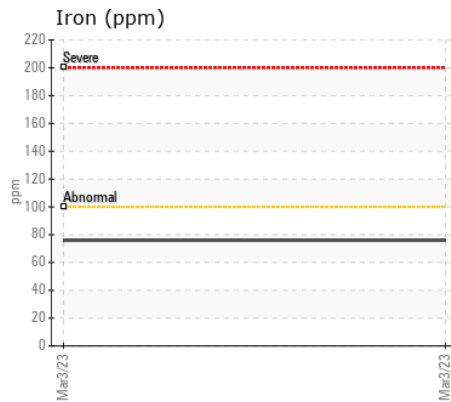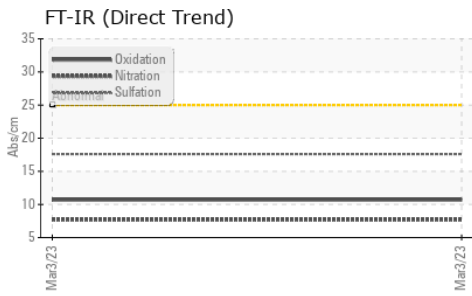

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0023089 **Received** : 10 Mar 2023
Lab Number : 05788961 **Tested** : 13 Mar 2023
Unique Number : 10373632 **Diagnosed** : 13 Mar 2023 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

M&M FLEET
 5046 BUCHANAN ST.
 HYATTSVILLE, MD
 US 20781
 Contact: June McClosky
 office@mmfleet.net
 T: (301)779-4545
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)