



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
SUSAN EIDE [GEOFF]
Machine Id
VOLVO PENTA 2006014371
Component
Port Diesel Engine
Fluid
VOLVO PENTA SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA045531	VPA047481	---
Sample Date		Client Info		13 Mar 2023	14 Mar 2022	---
Machine Age	hrs	Client Info		882	814	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	10	8	---
Chromium	ppm	ASTM D5185m	>6	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	1	<1	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>20	2	2	---
Lead	ppm	ASTM D5185m	>95	2	1	---
Copper	ppm	ASTM D5185m	>85	5	4	---
Tin	ppm	ASTM D5185m	>9	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	3	---
Potassium	ppm	ASTM D5185m	>20	1	1	---
Fuel		WC Method	>4.0	<1.0	0.2	---
Water		WC Method	>0.1	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844		0.3	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	8.0	9.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.0	22.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	1	---
Boron	ppm	ASTM D5185m		7	79	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		59	63	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		919	864	---
Calcium	ppm	ASTM D5185m		1105	1101	---
Phosphorus	ppm	ASTM D5185m		1036	1078	---
Zinc	ppm	ASTM D5185m		1234	1272	---
Sulfur	ppm	ASTM D5185m		3371	3063	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.5	19.4	---
Base Number (BN)	mg KOH/g	ASTM D2896		10.1	10.3	---
Visc @ 100°C	cSt	ASTM D445		13.5	13.9	---

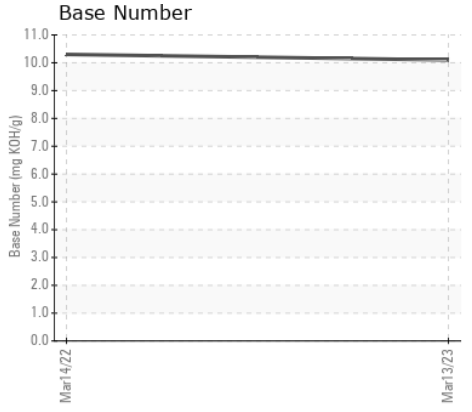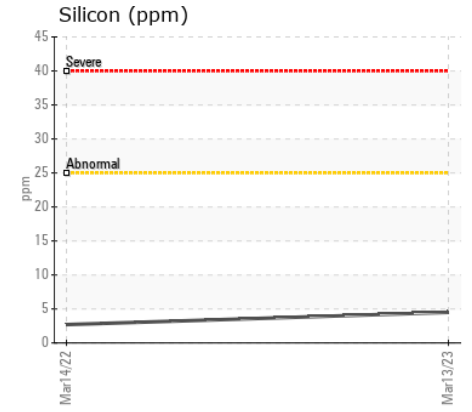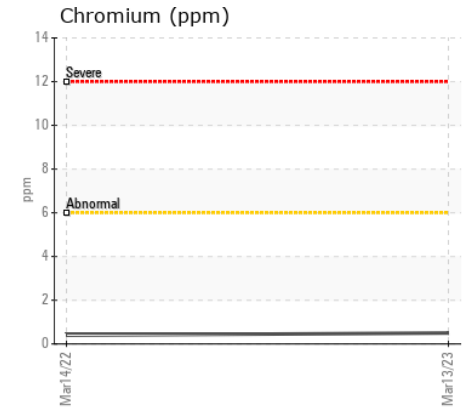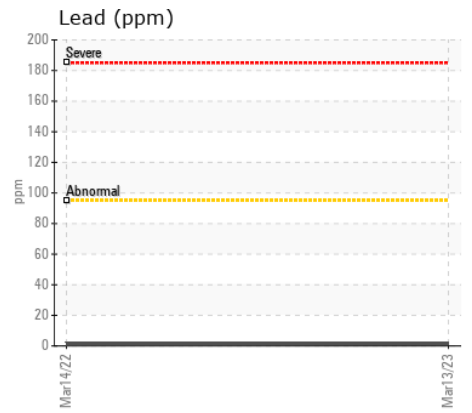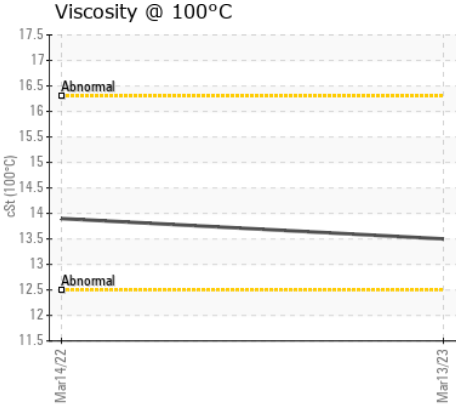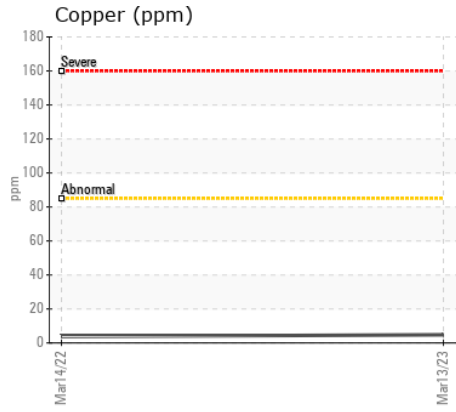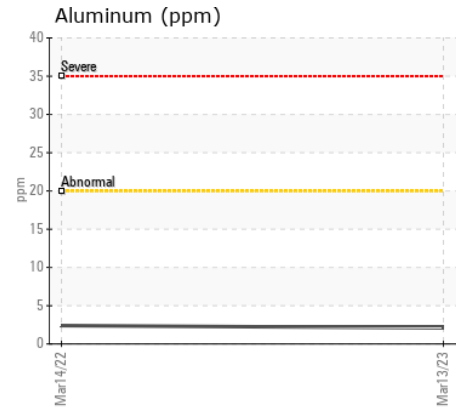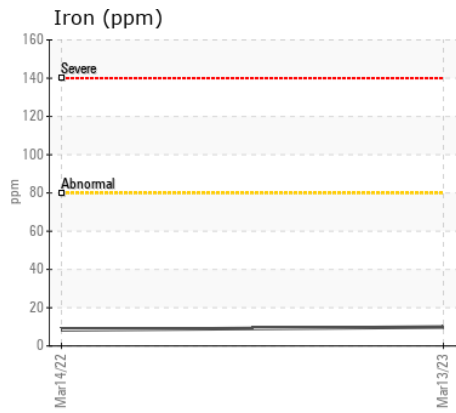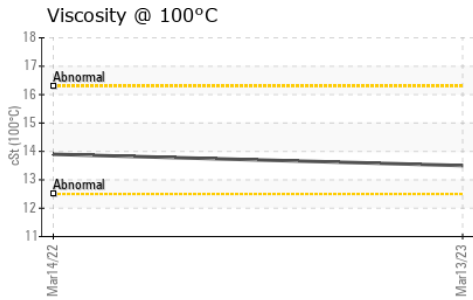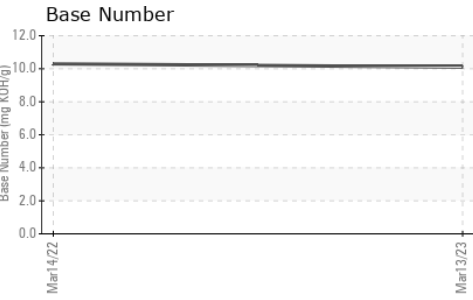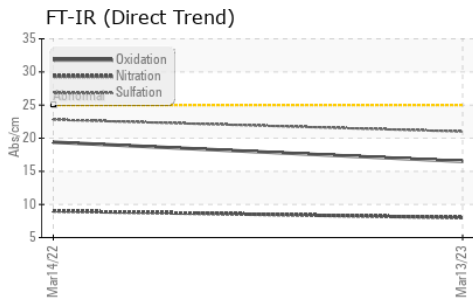

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA045531 **Received** : 16 Mar 2023
Lab Number : 05793238 **Tested** : 17 Mar 2023
Unique Number : 10377909 **Diagnosed** : 20 Mar 2023 - Sean Felton
Test Package : MOB 1 (Additional Tests: TBN)

Endor Marine LLC - Coastal Marine - 152124
 4300 11th Ave. NW
 SEATTLE, WA
 US 98107
 Contact: WILLOW YANARELLA
 service@coastalmarineengine.com
 T: (206)784-3703
 F: (206)784-8823

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)