



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
002 - PETRO CANADA 15W40

Component
New (Unused) Oil

Fluid
{not provided} (--- QTS)

RECOMMENDATION

This is a baseline read-out on the submitted sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0074329	---	---
Sample Date		Client Info		20 Mar 2023	---	---
Machine Age	mls	Client Info		0	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR












Iron	ppm	ASTM D5185m		<1	---	---
Chromium	ppm	ASTM D5185m		<1	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		1	---	---
Aluminum	ppm	ASTM D5185m		0	---	---
Lead	ppm	ASTM D5185m		<1	---	---
Copper	ppm	ASTM D5185m		0	---	---
Tin	ppm	ASTM D5185m		<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Silicon	ppm	ASTM D5185m		4	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water	%	ASTM D6304		NEG	---	---
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624		4.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415		16.9	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---

FLUID CONDITION

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		21	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		56	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		915	---	---
Calcium	ppm	ASTM D5185m		1088	---	---
Phosphorus	ppm	ASTM D5185m		939	---	---
Zinc	ppm	ASTM D5185m		1187	---	---
Sulfur	ppm	ASTM D5185m		3427	---	---
Oxidation	Abs/.1mm	*ASTM D7414		11.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		10.0	---	---
Visc @ 40°C	cSt	ASTM D445		98.9	---	---
Visc @ 100°C	cSt	ASTM D445		13.9	---	---
Viscosity Index (VI)	Scale	ASTM D2270		142	---	---

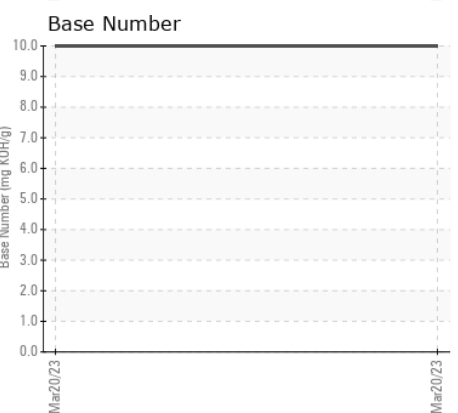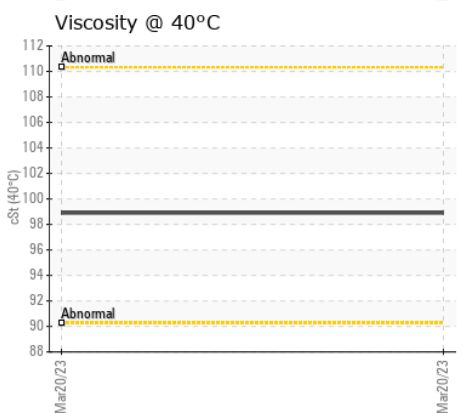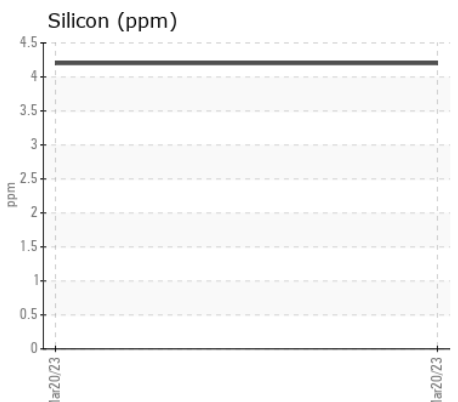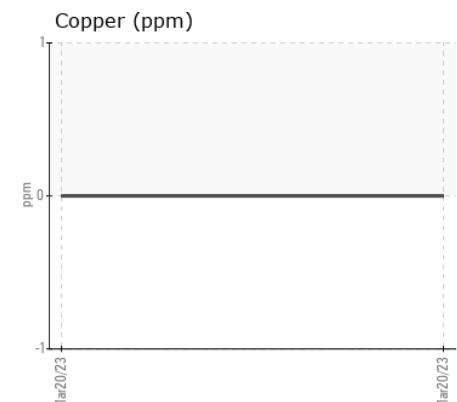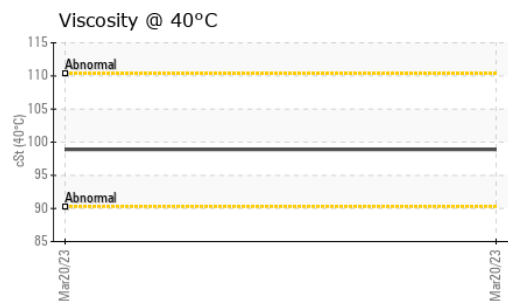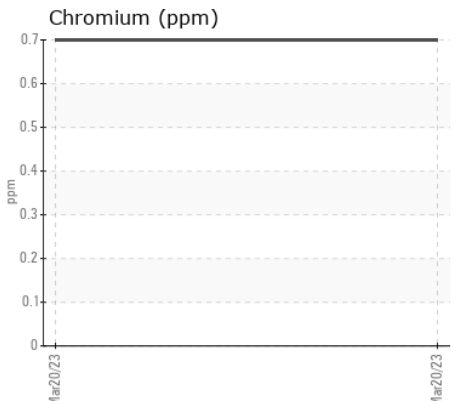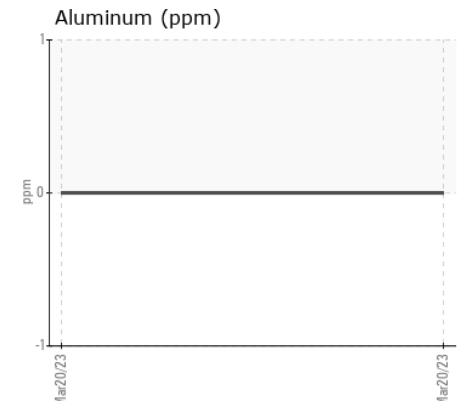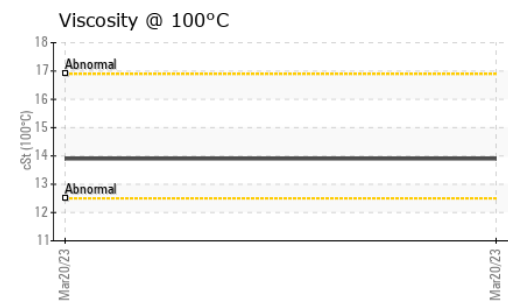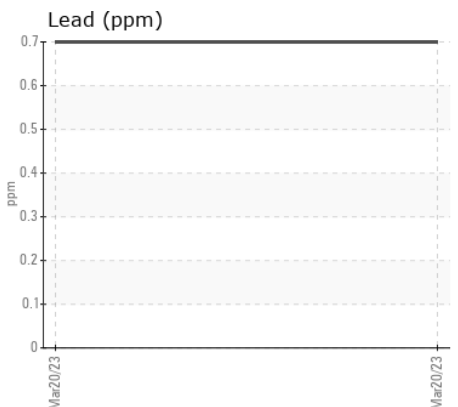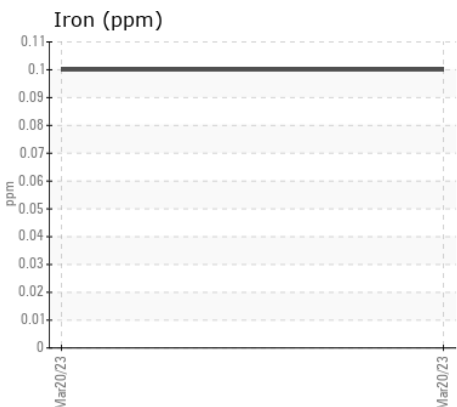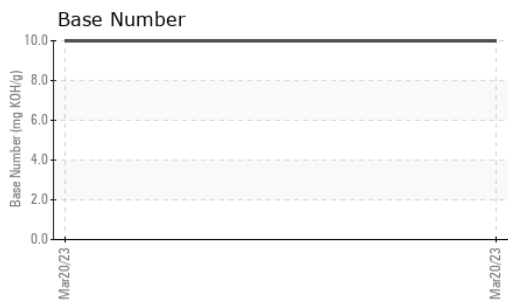

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0074329 **Received** : 23 Mar 2023
Lab Number : 05800543 **Diagnosed** : 28 Mar 2023
Unique Number : 10390227 **Diagnostician** : Jonathan Hester
Test Package : MOB 1 (Additional Tests: FT-IR, ICP-NewOil, KF, KV100, TBN, VI)

VILLAGE OF NORTH RIVERSIDE
 2345 S DESPLAINES
 NORTH RIVERSIDE, IL
 US 60546
 Contact: Service Manager
 vznrpdw@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: