



OIL ANALYSIS REPORT

WEAR	ATTENTION
CONTAMINATION	ABNORMAL
FLUID CONDITION	ATTENTION

Area
Store 4 - Fairmont
 Machine Id
JOHN DEERE 30G 1FF030GXEJK265962
 Component
Left Propel Gearbox
 Fluid
JOHN DEERE GL-5 80W90 (20 Oz)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0038166	LEC0024781	---
Sample Date		Client Info		03 Apr 2023	03 Dec 2021	---
Machine Age	hrs	Client Info		869	502	---
Oil Age	hrs	Client Info		367	502	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ABNORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		429	170	---
Iron	ppm	ASTM D5185m	>1250	467	308	---
Chromium	ppm	ASTM D5185m	>10	7	6	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		2	2	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m		31	23	---
Lead	ppm	ASTM D5185m		0	<1	---
Copper	ppm	ASTM D5185m		3	3	---
Tin	ppm	ASTM D5185m		0	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION









Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m		130	78	---
Potassium	ppm	ASTM D5185m	>20	5	7	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	MODER	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		2	0	---
Boron	ppm	ASTM D5185m		6	20	---
Barium	ppm	ASTM D5185m		0	28	---
Molybdenum	ppm	ASTM D5185m		6	17	---
Manganese	ppm	ASTM D5185m		6	5	---
Magnesium	ppm	ASTM D5185m		90	13	---
Calcium	ppm	ASTM D5185m		3170	3926	---
Phosphorus	ppm	ASTM D5185m		848	595	---
Zinc	ppm	ASTM D5185m		1024	737	---
Sulfur	ppm	ASTM D5185m		3073	2297	---
Visc @ 40°C	cSt	ASTM D445		59.8	91.7	---

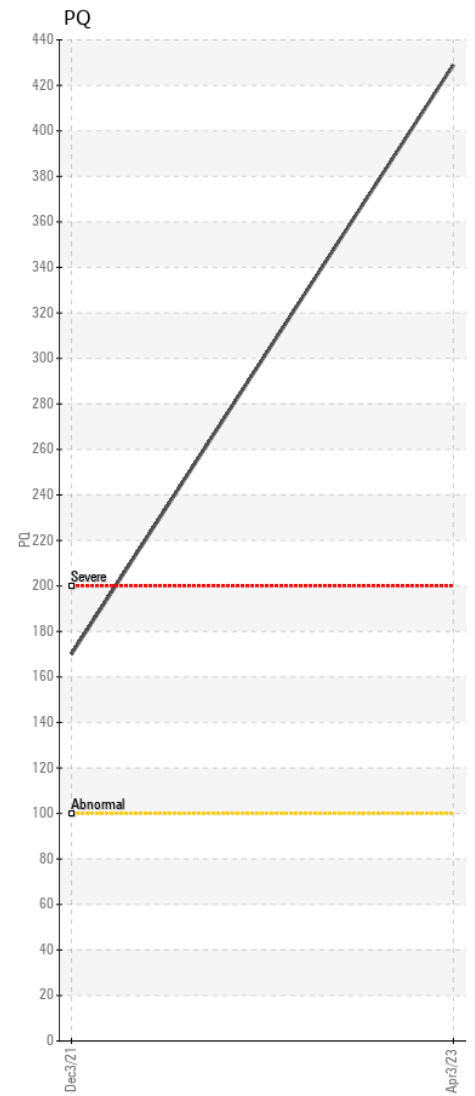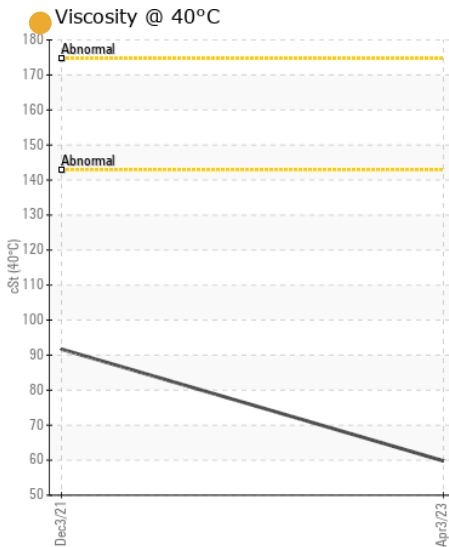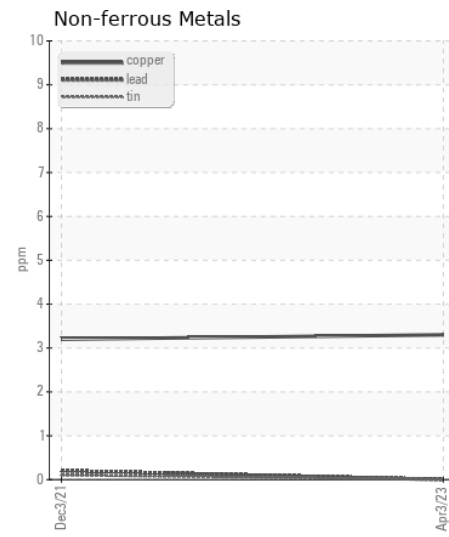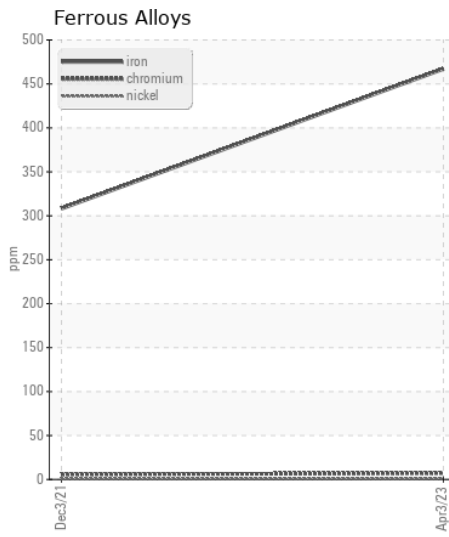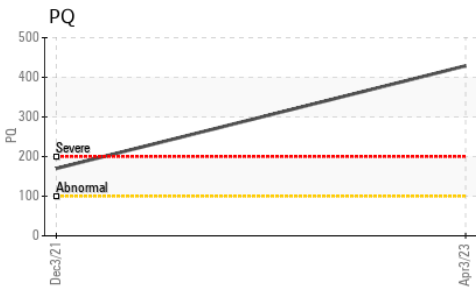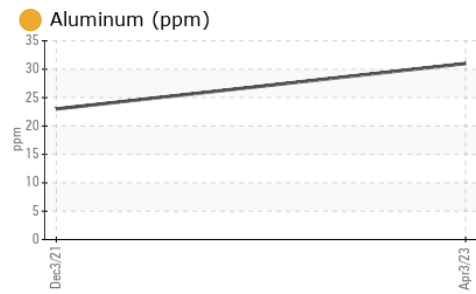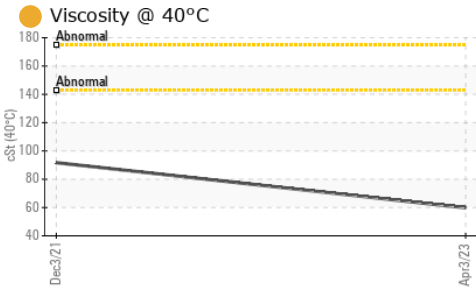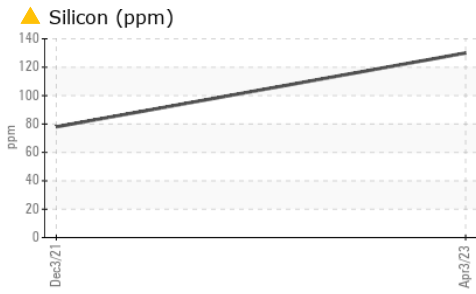

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0038166 **Received** : 07 Apr 2023
Lab Number : 05814120 **Tested** : 12 Apr 2023
Unique Number : 10416912 **Diagnosed** : 12 Apr 2023 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570