



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

PAUL PITTMAN

Machine Id

VOLVO MD2040-C PAUL PITTMAN

Component

Diesel Engine

Fluid

VOLVO VDS-4.5 Premium Motor Oil 15W40 (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA047767	VPA027611	---
Sample Date		Client Info		23 Mar 2023	14 Jul 2020	---
Machine Age	hrs	Client Info		2500	1576	---
Oil Age	hrs	Client Info		120	150	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	0	11	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>25	0	2	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	1	2	---
Tin	ppm	ASTM D5185m	>15	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	3	4	---
Potassium	ppm	ASTM D5185m	>20	<1	4	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	5.8	7.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.9	19.2	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	2	---
Boron	ppm	ASTM D5185m		10	82	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		59	30	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m		899	790	---
Calcium	ppm	ASTM D5185m		1103	1230	---
Phosphorus	ppm	ASTM D5185m		995	813	---
Zinc	ppm	ASTM D5185m		1168	931	---
Sulfur	ppm	ASTM D5185m		3044	2415	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.1	13.9	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.7	---	---
Visc @ 100°C	cSt	ASTM D445		13.5	13.7	---

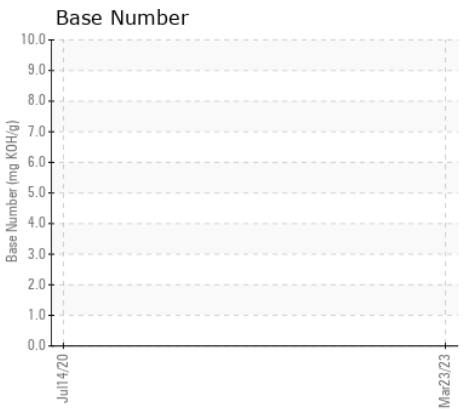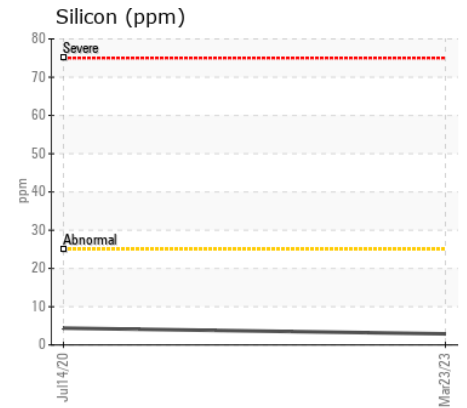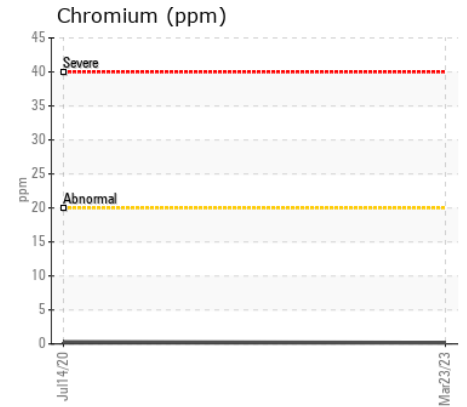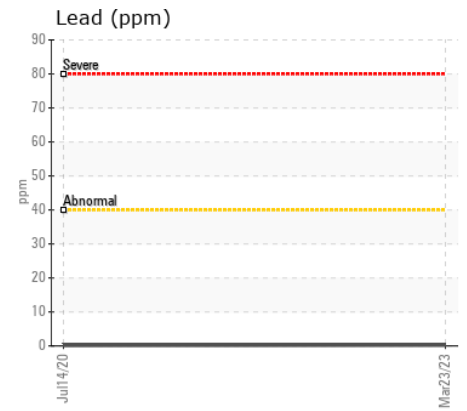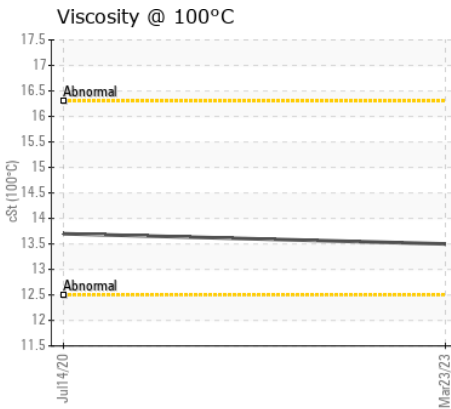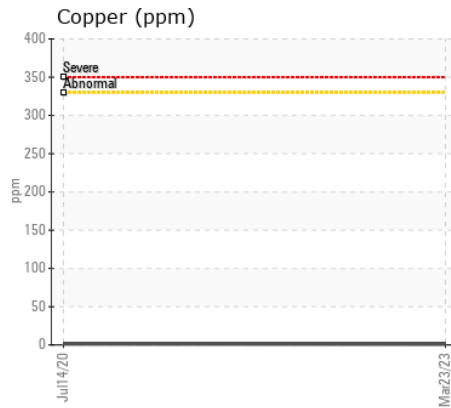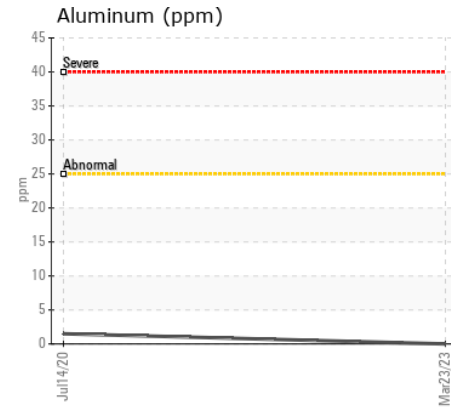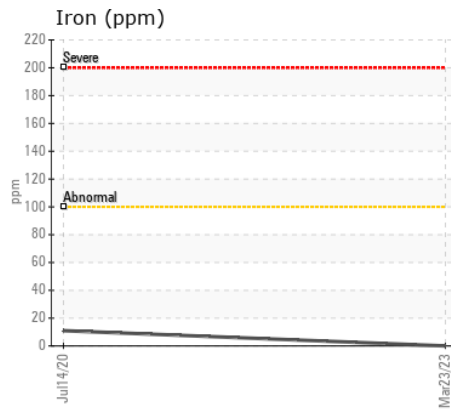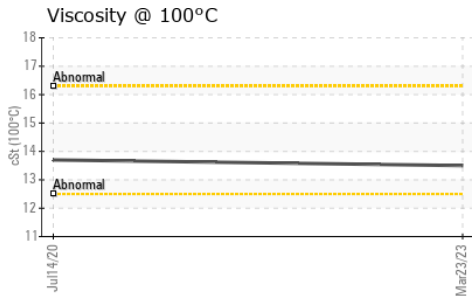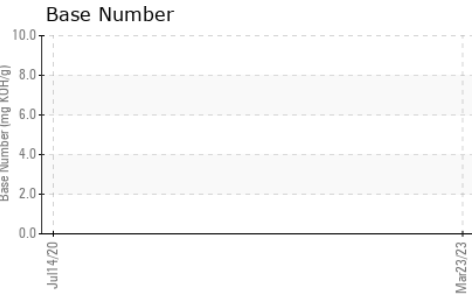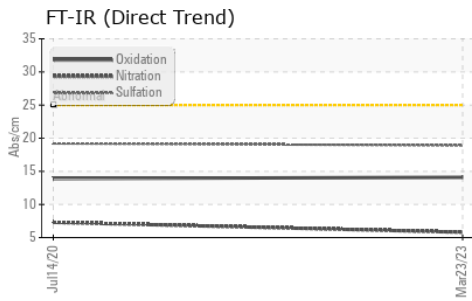

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VPA047767 **Received** : 07 Apr 2023  
**Lab Number** : 05814308 **Tested** : 10 Apr 2023  
**Unique Number** : 10417100 **Diagnosed** : 12 Apr 2023 - Jonathan Hester  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Northwest Diesel Power**  
 1325 ROEDER AVE SUITE 103  
 BELLINGHAM, WA  
 US 98225  
 Contact: BRANDON ROBERTSON  
 parts@nwdieselpower.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: