



WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**MWL**  
Component  
**Port Main Engine**  
Fluid  
**CHEVRON DELO 400 XLE 15W40 (--- GAL)**

**RECOMMENDATION**

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW05823799</b>	MW05823794	MW05749258
Sample Date		Client Info		<b>18 Apr 2023</b>	18 Apr 2023	24 Jan 2023
Machine Age	hrs	Client Info		<b>34136</b>	34900	33270
Oil Age	hrs	Client Info		<b>866</b>	764	376
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>ABNORMAL</b>	NORMAL	NORMAL

**WEAR**

The lead level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>8</b>	8	5
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>0</b>	0	3
Lead	ppm	ASTM D5185m	>18	<b>▲ 29</b>	13	2
Copper	ppm	ASTM D5185m	>80	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>14	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>5</b>	5	5
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	1	1
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.6</b>	0.6	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.6</b>	7.2	6.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.3</b>	24.0	22.5
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>2</b>	2	0
Boron	ppm	ASTM D5185m		<b>310</b>	350	315
Barium	ppm	ASTM D5185m		<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m		<b>97</b>	98	93
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>499</b>	481	494
Calcium	ppm	ASTM D5185m		<b>1364</b>	1411	1554
Phosphorus	ppm	ASTM D5185m	760	<b>768</b>	787	858
Zinc	ppm	ASTM D5185m	830	<b>942</b>	971	1085
Sulfur	ppm	ASTM D5185m	2770	<b>2400</b>	2617	3287
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.3</b>	19.4	17.2
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	<b>6.8</b>	6.7	7.7
Visc @ 100°C	cSt	ASTM D445	14.9	<b>12.5</b>	12.6	12.7


▲ Non-ferrous Metals

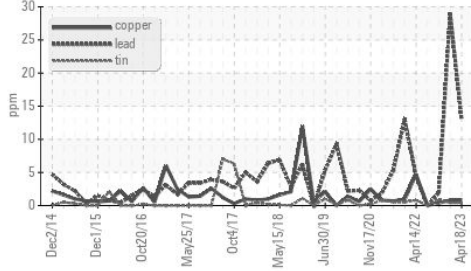


Ferrous Alloys

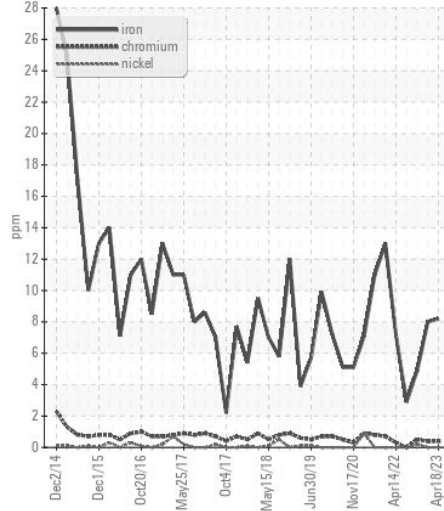


Base Number

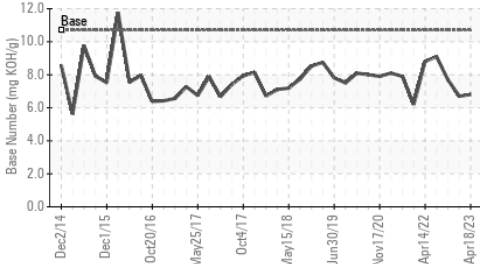


Viscosity @ 100°C

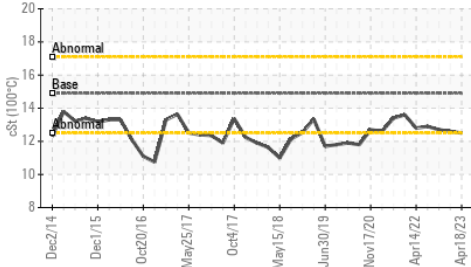


▲ Non-ferrous Metals

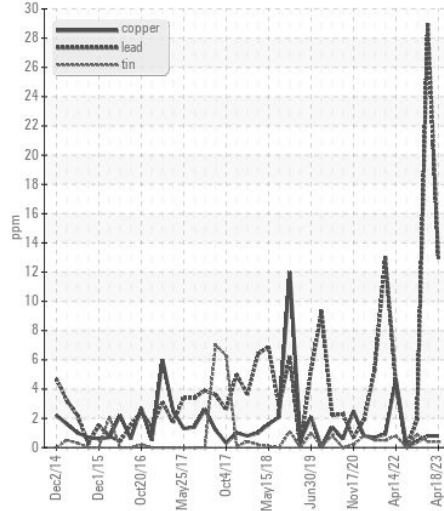

Viscosity @ 100°C

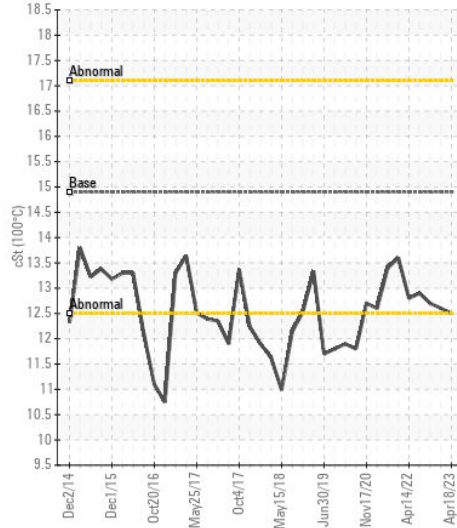

Base Number

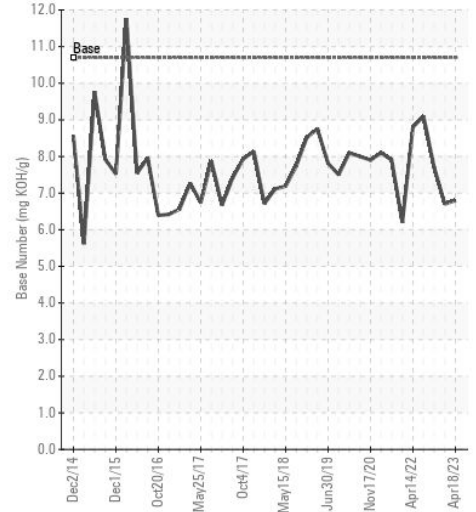

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW05823799  
**Lab Number** : 05823799  
**Unique Number** : 10431882  
**Test Package** : MAR 2  
**Received** : 19 Apr 2023  
**Tested** : 20 Apr 2023  
**Diagnosed** : 21 Apr 2023 - Don Baldrige

**ILLINOIS MARINE TOWING**  
 PO BOX 391  
 LEMONT, IL  
 US 60439  
 Contact: RHETT DANIEL  
 rdaniel@imtowing.com  
 T: (630)280-4926  
 F: (630)739-2041

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)