



Machine Id
PRS
Component
Starboard Main Engine
Fluid
CHEVRON DELO 400 XLE 15W40 (28 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW05823803	MW05823790	MW05663147
Sample Date		Client Info		18 Apr 2023	18 Apr 2023	10 Oct 2022
Machine Age	hrs	Client Info		28186	28766	27634
Oil Age	hrs	Client Info		652	580	590
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	4	4	3
Chromium	ppm	ASTM D5185m	>8	<1	<1	0
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	0	0	<1
Lead	ppm	ASTM D5185m	>18	0	0	0
Copper	ppm	ASTM D5185m	>80	<1	<1	0
Tin	ppm	ASTM D5185m	>14	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Light fuel dilution occurring. No other contaminants were detected in the oil.


Silicon	ppm	ASTM D5185m	>20	5	5	3
Potassium	ppm	ASTM D5185m	>20	12	8	7
Fuel	%	ASTM D3524	>4.0	▲ 2.4	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol	%	*ASTM D2982		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	5.8	5.8	6.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	21.2	22.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m	>75	5	9	4
Boron	ppm	ASTM D5185m		289	300	301
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		105	99	82
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		540	489	375
Calcium	ppm	ASTM D5185m		1328	1577	1349
Phosphorus	ppm	ASTM D5185m	760	710	731	898
Zinc	ppm	ASTM D5185m	830	853	876	1077
Sulfur	ppm	ASTM D5185m	2770	2432	2733	3256
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.7	15.2	16.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	7.7	8.2	8.2
Visc @ 100°C	cSt	ASTM D445	14.9	● 12.3	12.6	12.7


● Viscosity @ 100°C

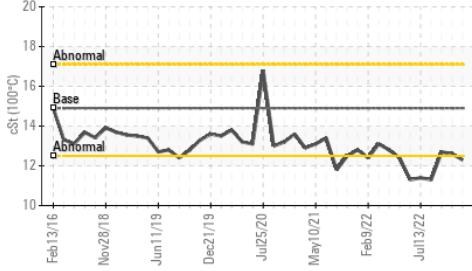


Ferrous Alloys

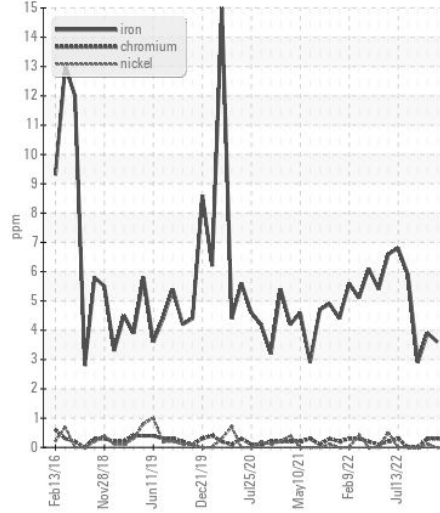


▲ Fuel Dilution

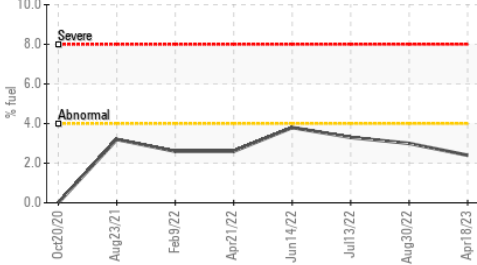


Non-ferrous Metals

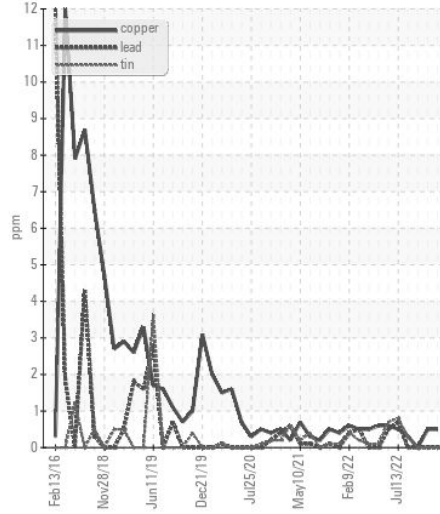


Base Number

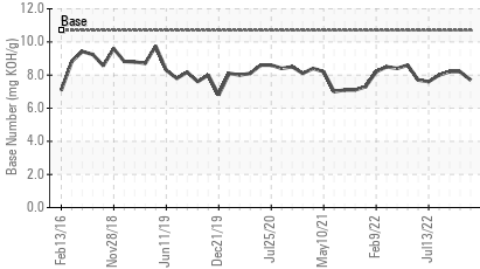


Glycol Contamination

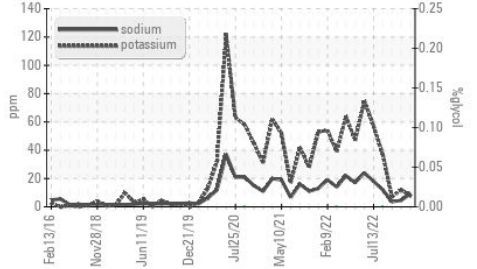

● Viscosity @ 100°C

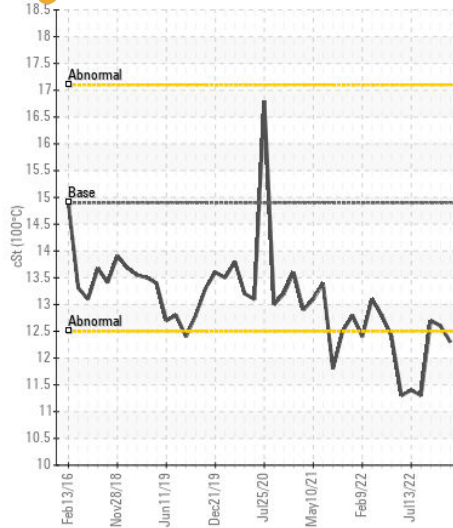

Base Number

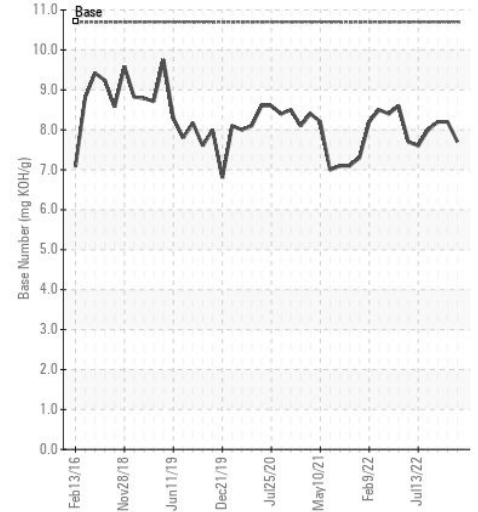

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW05823803 **Received** : 19 Apr 2023
Lab Number : 05823803 **Tested** : 21 Apr 2023
Unique Number : 10431886 **Diagnosed** : 21 Apr 2023 - Don Baldrige
Test Package : MAR 2 (Additional Tests: FuelDilution, Glycol, PercentFuel)

ILLINOIS MARINE TOWING
 PO BOX 391
 LEMONT, IL
 US 60439
 Contact: RHETT DANIEL
 rdaniel@imtowing.com
 T: (630)280-4926
 F: (630)739-2041

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)