



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 9 - Marietta [RO#138039]
Machine Id
JOHN DEERE 410E 1DW410EBENF713866
Component
Front Axle
Fluid
JOHN DEERE HY-GARD HYD/TRANS (16 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0037581	LEC0037203	---
Sample Date		Client Info		19 Apr 2023	21 Nov 2022	---
Machine Age	hrs	Client Info		1292	621	---
Oil Age	hrs	Client Info		1292	621	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		N/A	None	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		11	16	---
Iron	ppm	ASTM D5185m	>1501	26	30	---
Chromium	ppm	ASTM D5185m	>11	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>21	1	1	---
Lead	ppm	ASTM D5185m	>51	4	6	---
Copper	ppm	ASTM D5185m	>101	4	3	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>31	4	5	---
Potassium	ppm	ASTM D5185m	>20	<1	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	4	3	---
Boron	ppm	ASTM D5185m	6	0	4	---
Barium	ppm	ASTM D5185m	0	2	0	---
Molybdenum	ppm	ASTM D5185m	0	<1	<1	---
Manganese	ppm	ASTM D5185m		2	2	---
Magnesium	ppm	ASTM D5185m	145	96	95	---
Calcium	ppm	ASTM D5185m	3570	3342	3523	---
Phosphorus	ppm	ASTM D5185m	1290	1005	1065	---
Zinc	ppm	ASTM D5185m	1640	1203	1273	---
Sulfur	ppm	ASTM D5185m		4119	4615	---
Visc @ 40°C	cSt	ASTM D445	57.0	50.1	51.2	---

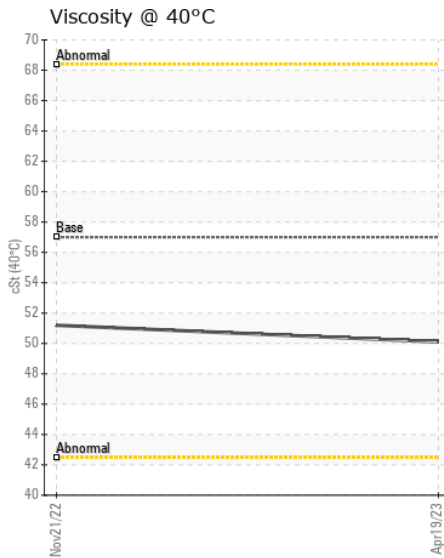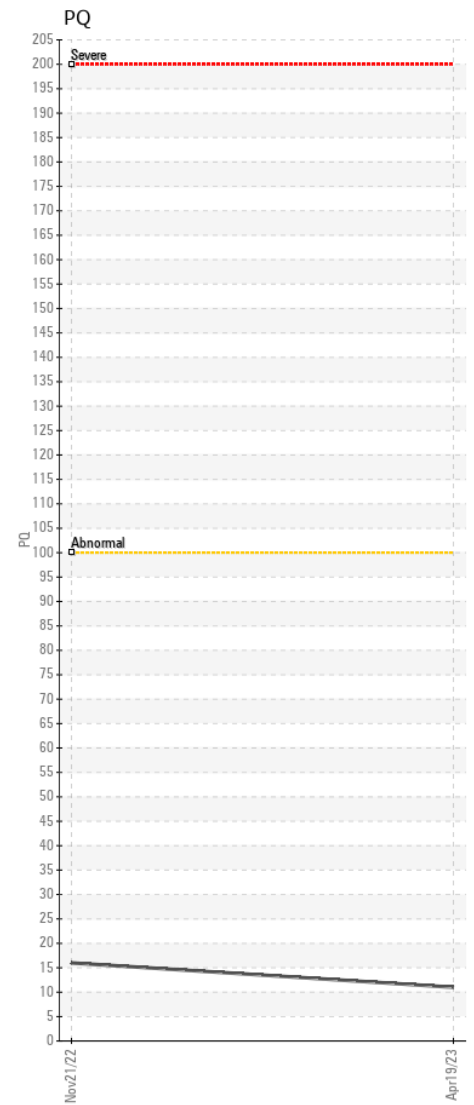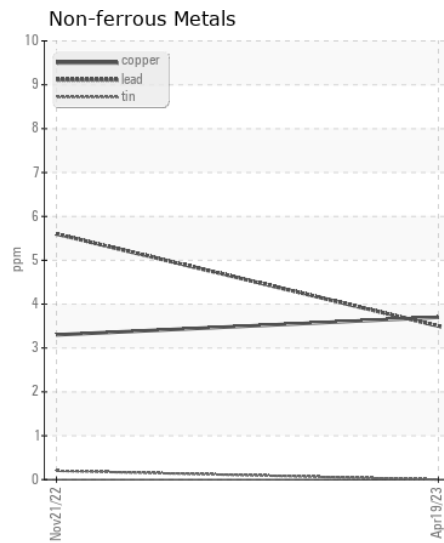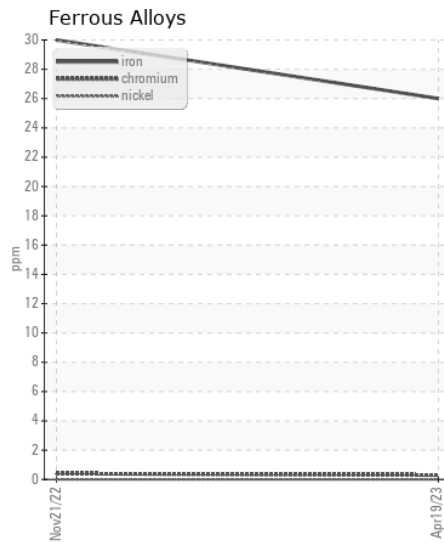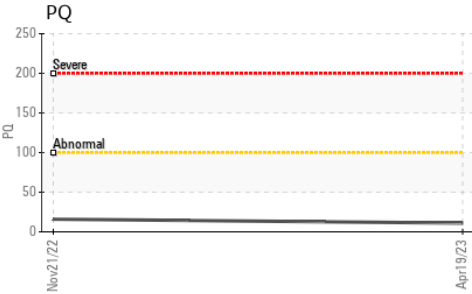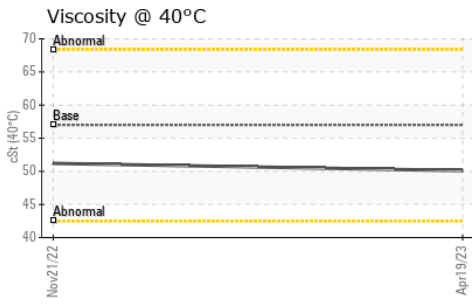

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0037581 **Received** : 24 Apr 2023
Lab Number : 05827889 **Tested** : 25 Apr 2023
Unique Number : 10441382 **Diagnosed** : 26 Apr 2023 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (740)373-5570