



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
3275 - INTERIOR SUPPLY

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 32 (--- LTR)

RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 32. Please confirm. Please specify the component make and model with your next sample.

WEAR

All component wear rates are normal.











CONTAMINATION

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0778158	---	---
Sample Date		Client Info		23 Apr 2023	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185m	>20	9	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	<1	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>75	2	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>20	9	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 19329	---	---
Particles >6µm		ASTM D7647	>1300	▲ 1998	---	---
Particles >14µm		ASTM D7647	>160	65	---	---
Particles >21µm		ASTM D7647	>40	16	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 21/18/13	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	5	0	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	5	<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	25	6	---	---
Calcium	ppm	ASTM D5185m	200	35	---	---
Phosphorus	ppm	ASTM D5185m	300	323	---	---
Zinc	ppm	ASTM D5185m	370	375	---	---
Sulfur	ppm	ASTM D5185m	2500	3595	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.30	---	---
Visc @ 40°C	cSt	ASTM D445	32	31.8	---	---
Visc @ 100°C	cSt	ASTM D445	5.4	6.3	---	---
Viscosity Index (VI)	Scale	ASTM D2270	102	153	---	---

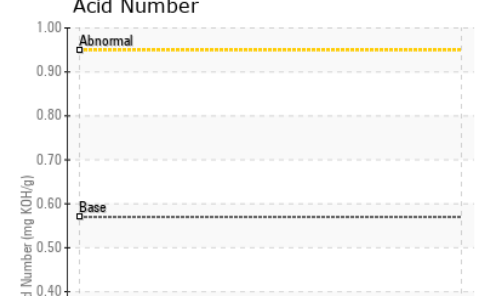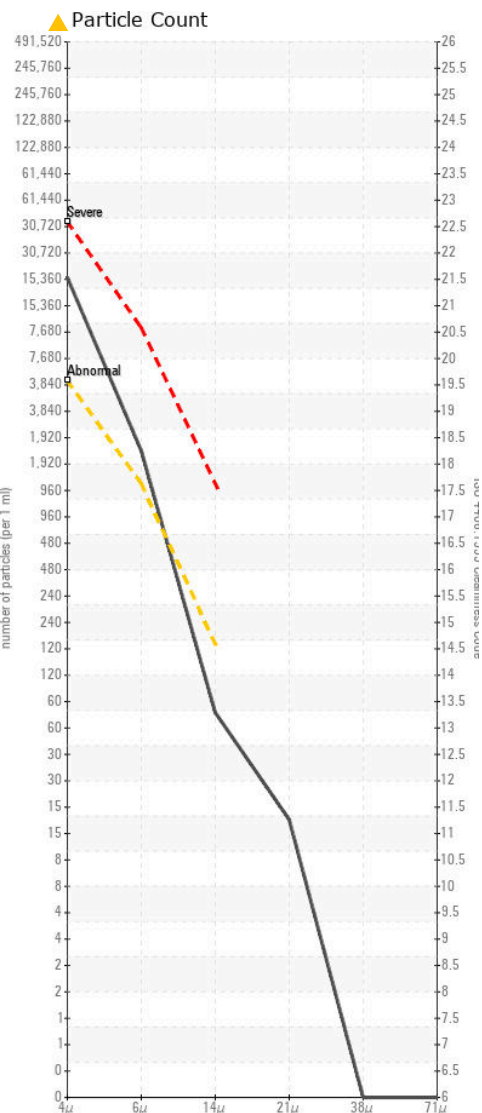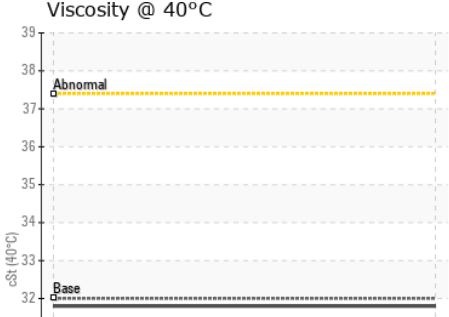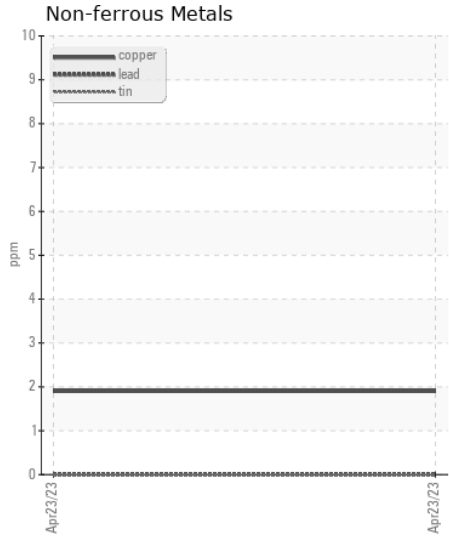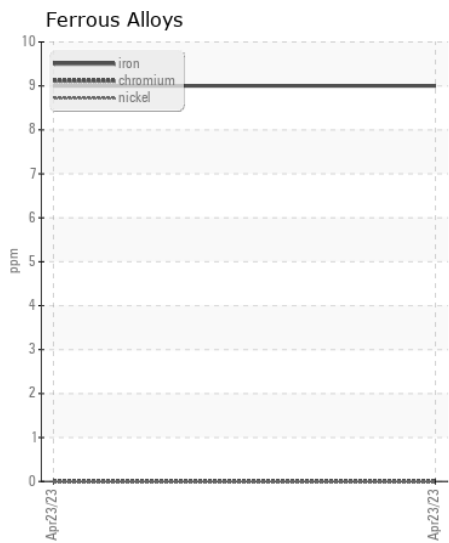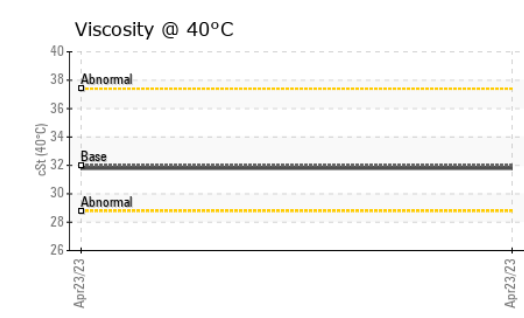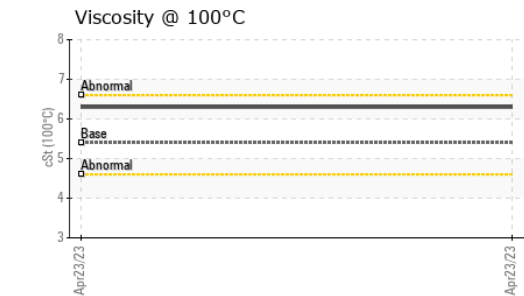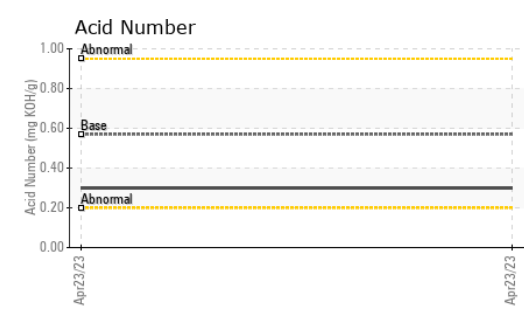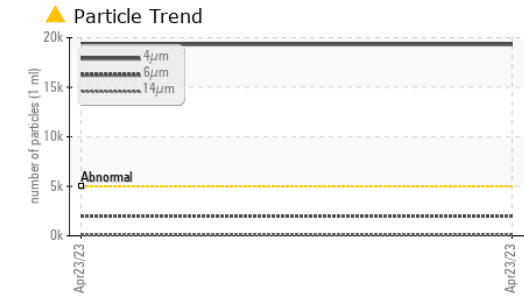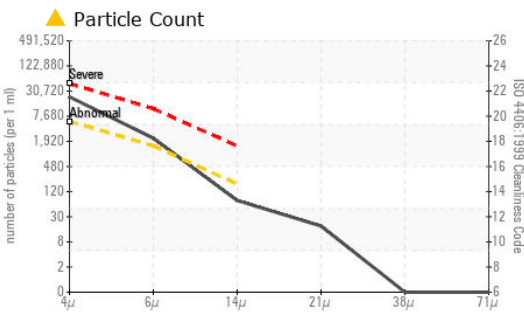

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0778158 **Received** : 24 Apr 2023
Lab Number : 05828389 **Diagnosed** : 25 Apr 2023
Unique Number : 10441882 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: KV100, VI)

HIAB AMERICAS
 12233 WILLIAMS RD
 PERRYSBURG, OH
 US 43551
 Contact: TECH SUPPORT
 support@hiabtechline.zendesk.com
 T:
 F: (419)482-6911

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)