



# OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**HYSTER 7230 (S/N 561K)**  
Component  
**Transmission**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0021631</b>	---	---
Sample Date		Client Info		<b>18 Apr 2023</b>	---	---
Machine Age	hrs	Client Info		<b>3650</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

## WEAR

The iron level is abnormal. The copper level is abnormal.

Iron	ppm	ASTM D5185m	>200	<b>▲ 262</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>50	<b>6</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>200	<b>▲ 344</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION












There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	<b>38</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

## FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>158	<b>5</b>	---	---
Boron	ppm	ASTM D5185m	250	<b>61</b>	---	---
Barium	ppm	ASTM D5185m	10	<b>1</b>	---	---
Molybdenum	ppm	ASTM D5185m	100	<b>29</b>	---	---
Manganese	ppm	ASTM D5185m		<b>7</b>	---	---
Magnesium	ppm	ASTM D5185m	450	<b>134</b>	---	---
Calcium	ppm	ASTM D5185m	3000	<b>1326</b>	---	---
Phosphorus	ppm	ASTM D5185m	1150	<b>795</b>	---	---
Zinc	ppm	ASTM D5185m	1350	<b>641</b>	---	---
Sulfur	ppm	ASTM D5185m	4250	<b>16783</b>	---	---
Visc @ 40°C	cSt	ASTM D445	115	<b>81.5</b>	---	---

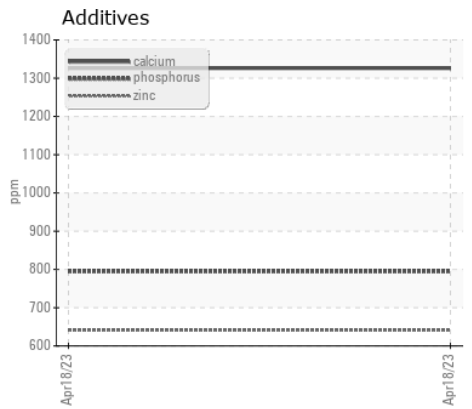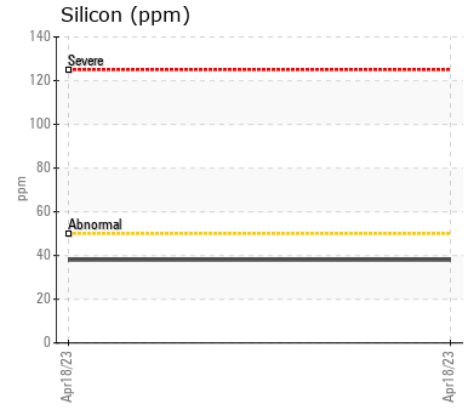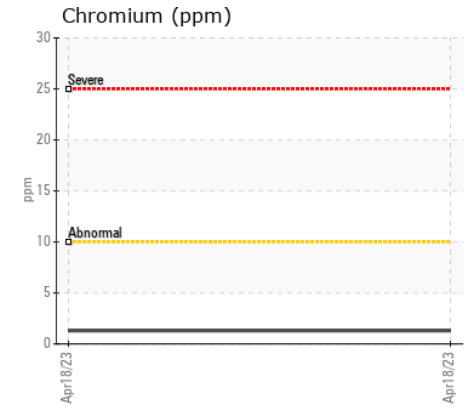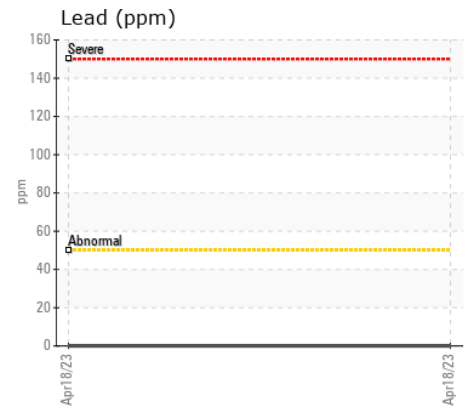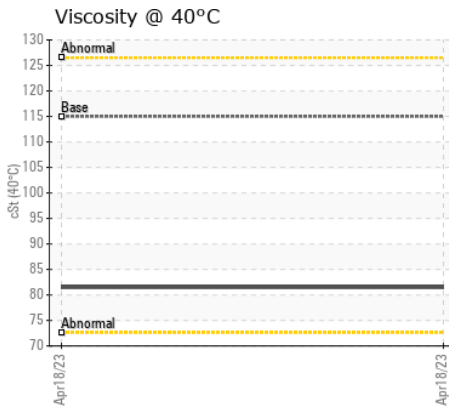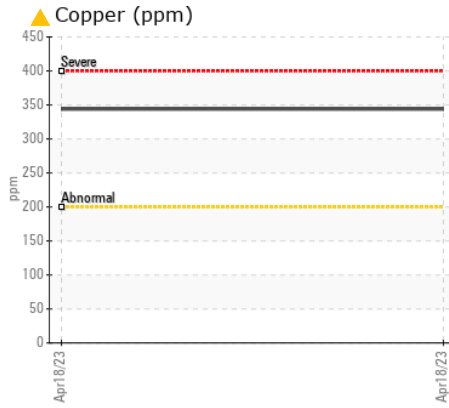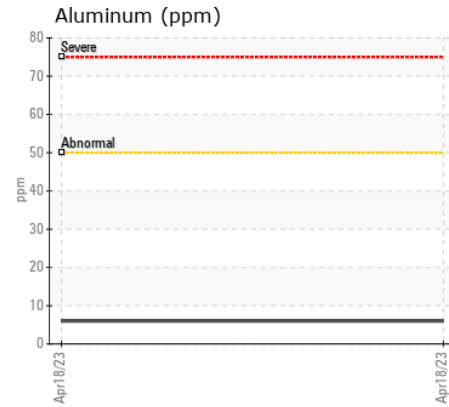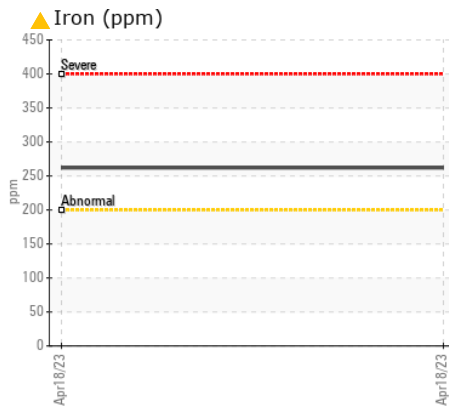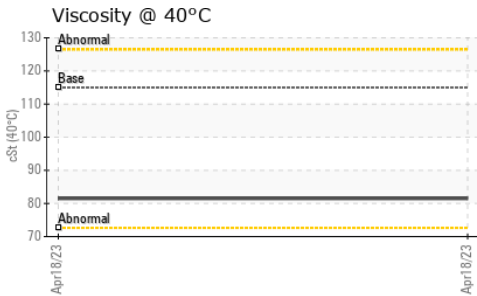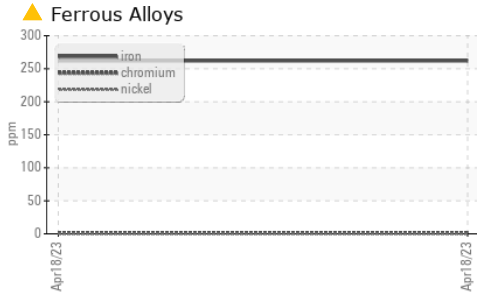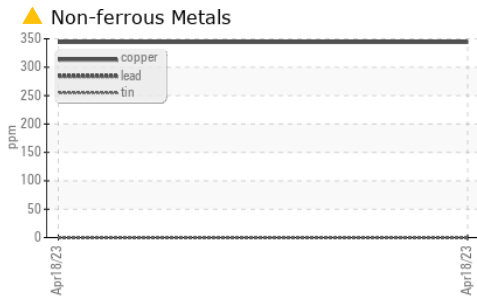

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0021631  
**Lab Number** : 05836998  
**Unique Number** : 10455801  
**Test Package** : MOB 1

**ABERDEEN PROVING GROUND**  
 6721 RARITON AVENUE  
 ABERDEEN, MD  
 US 21005  
 Contact: TONY DAVIS  
 tdavis@vacranetworks.com  
 T: (410)688-1725  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)