



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	ATTENTION

Machine Id
1 (S/N 8PL00664)

Component
Hydraulic System

Fluid
MOBIL HYDRAULIC OIL AW 32 (22 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0781039	---	---
Sample Date		Client Info		28 Apr 2023	---	---
Machine Age	yrs	Client Info		2	---	---
Oil Age	yrs	Client Info		2	---	---
Filter Age	yrs	Client Info		1	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	0	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>20	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	0	---	---
Lead	ppm	ASTM D5185m	>20	0	---	---
Copper	ppm	ASTM D5185m	>20	<1	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>15	0	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.05	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 5297	---	---
Particles >6µm		ASTM D7647	>1300	▲ 1564	---	---
Particles >14µm		ASTM D7647	>160	139	---	---
Particles >21µm		ASTM D7647	>40	29	---	---
Particles >38µm		ASTM D7647	>10	3	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 20/18/14	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---

FLUID CONDITION

Confirm oil type.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		5	---	---
Calcium	ppm	ASTM D5185m		59	---	---
Phosphorus	ppm	ASTM D5185m		333	---	---
Zinc	ppm	ASTM D5185m		400	---	---
Sulfur	ppm	ASTM D5185m		1571	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.28	---	---
Visc @ 40°C	cSt	ASTM D445	32	▲ 39.7	---	---

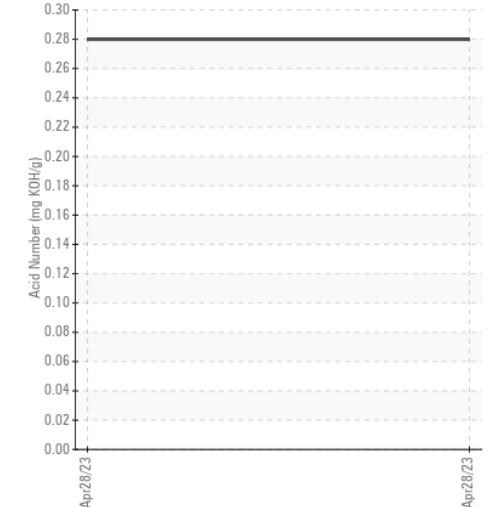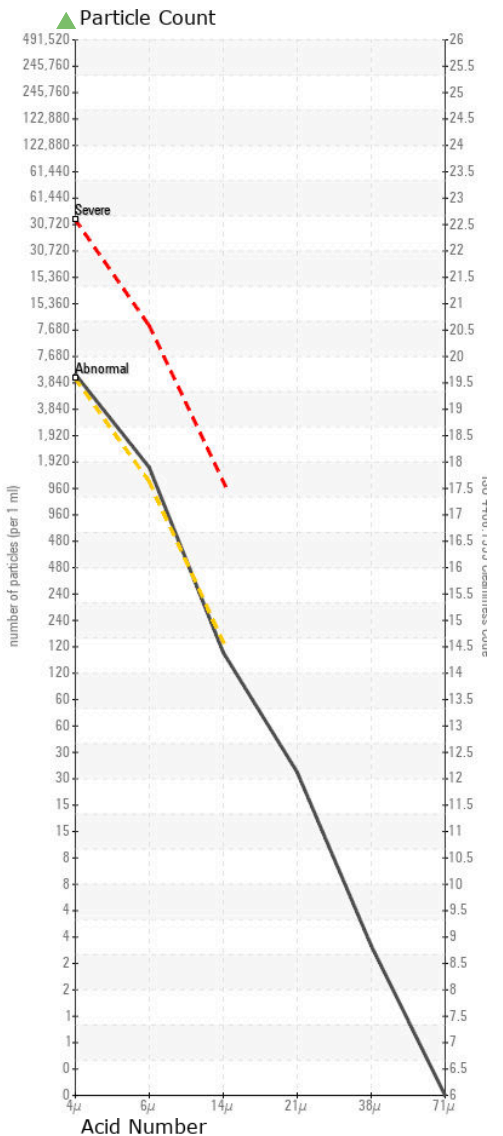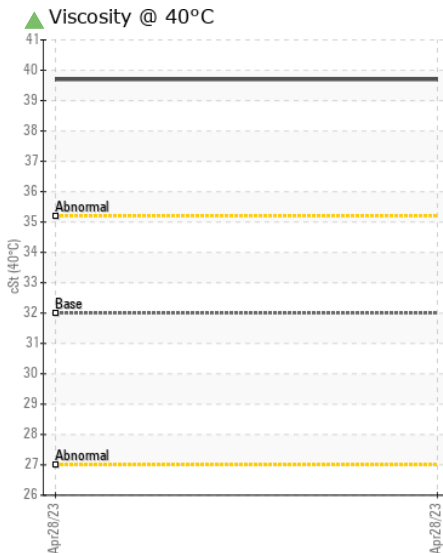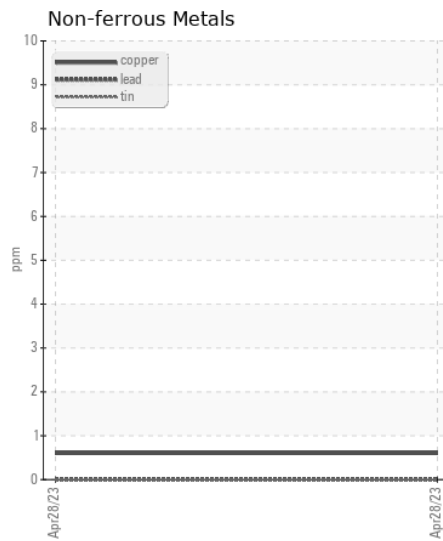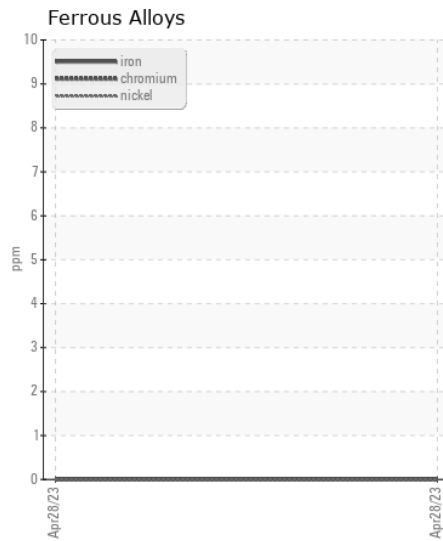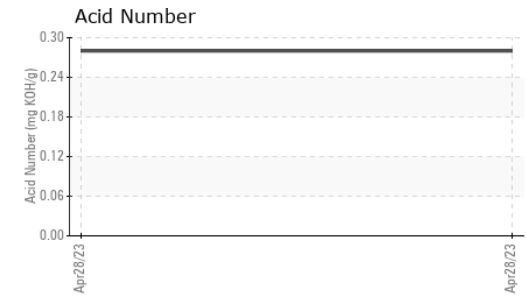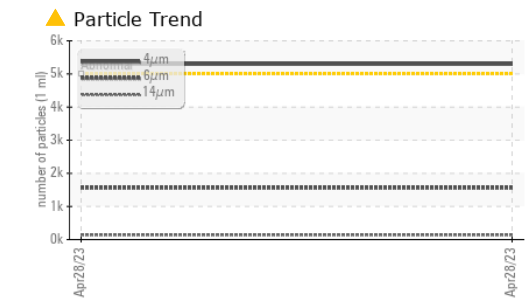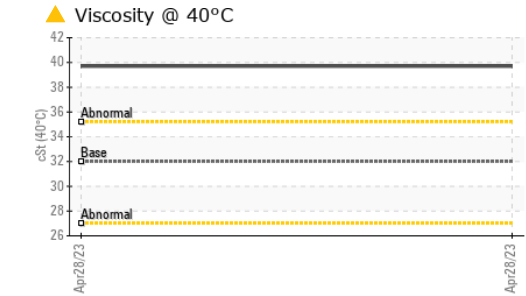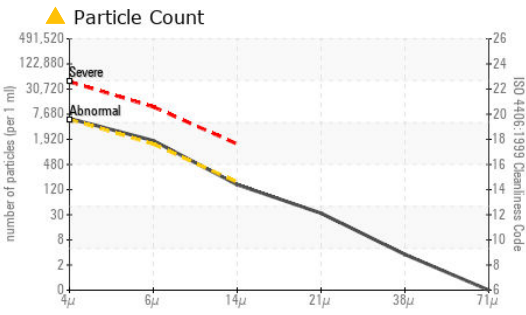

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0781039 Recieved : 04 May 2023
 Lab Number : 05837717 Diagnosed : 08 May 2023
 Unique Number : 10456520 Diagnostician : Don Baldrige
 Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CASCO USA
 2022 FILMORE AVENUE
 ERIE, PA
 US 16506
 Contact: Phil Shaver
 pshaver@cascousa.com

T:
F: