



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
4160135
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0774614	WC0485514	---
Sample Date		Client Info		29 Apr 2023	29 Jul 2020	---
Machine Age	hrs	Client Info		12045	11049	---
Oil Age	hrs	Client Info		376	175	---
Filter Age	hrs	Client Info		0	175	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	32	10	---
Chromium	ppm	ASTM D5185m	>20	1	<1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	4	3	---
Lead	ppm	ASTM D5185m	>40	0	<1	---
Copper	ppm	ASTM D5185m	>330	2	<1	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	14	---
Potassium	ppm	ASTM D5185m	>20	1	0	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	1.3	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	8.5	5.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.5	21.7	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	3	6	---
Boron	ppm	ASTM D5185m	250	195	376	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	90	85	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	450	694	448	---
Calcium	ppm	ASTM D5185m	3000	1577	1753	---
Phosphorus	ppm	ASTM D5185m	1150	769	931	---
Zinc	ppm	ASTM D5185m	1350	933	1014	---
Sulfur	ppm	ASTM D5185m	4250	2980	2562	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.0	16.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.3	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	12.8	---

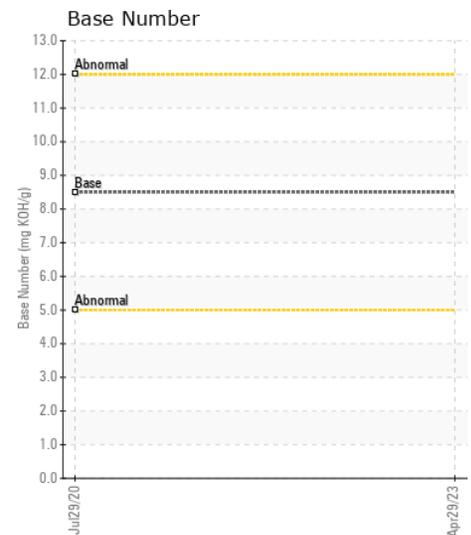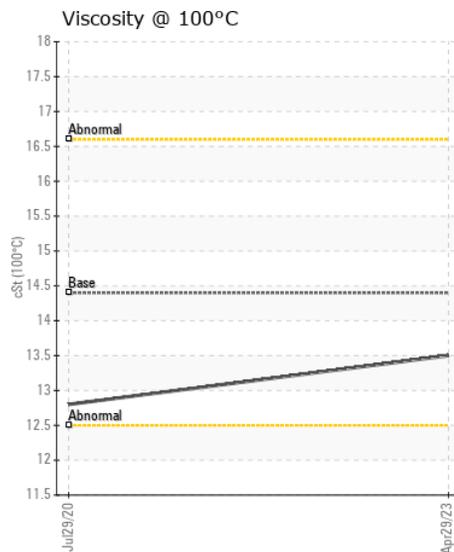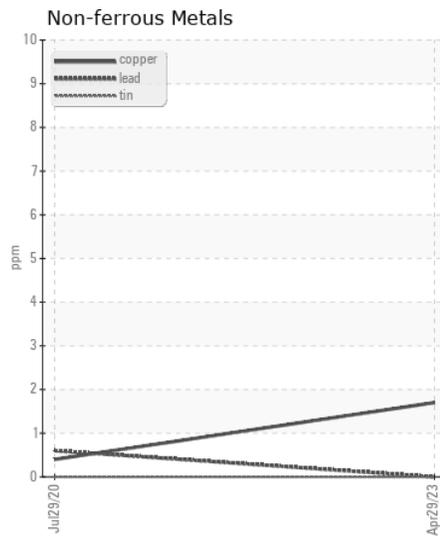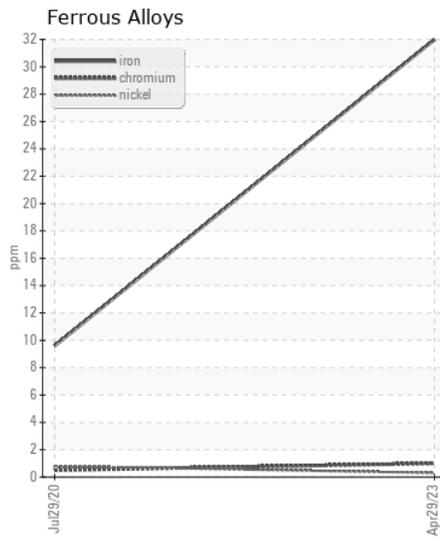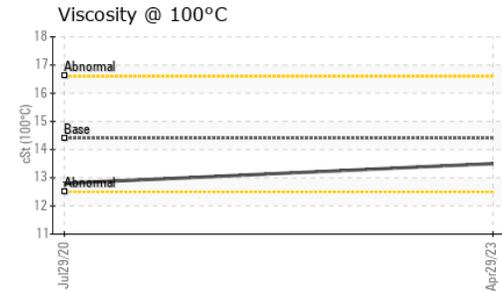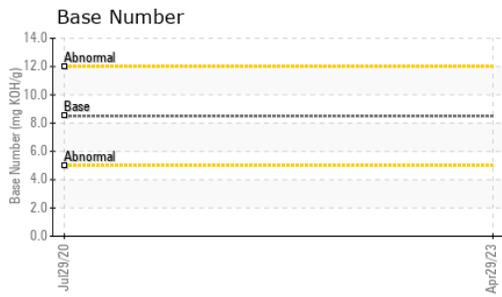

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0774614 **Received** : 04 May 2023
Lab Number : 05838161 **Diagnosed** : 05 May 2023
Unique Number : 10456964 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

KELLER - NORTH AMERICA
 510 NINE NORTH COURT
 ALPHARETTA, GA
 US 30004-2961
 Contact: SHOP MANAGER
 SRLEWIS@KELLER-NA.COM
 T: (770)442-1801
 F: (770)442-8344