



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A25F 13541
Component
Bogie/Center Right Final Drive
Fluid
VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP383989	---	---
Sample Date		Client Info		02 May 2023	---	---
Machine Age	hrs	Client Info		7844	---	---
Oil Age	hrs	Client Info		4000	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m		66	---	---
Chromium	ppm	ASTM D5185m		<1	---	---
Nickel	ppm	ASTM D5185m		1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		1	---	---
Lead	ppm	ASTM D5185m		<1	---	---
Copper	ppm	ASTM D5185m		10	---	---
Tin	ppm	ASTM D5185m		<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	MODER	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		4	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method		NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	---	---
Boron	ppm	ASTM D5185m		221	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		1	---	---
Calcium	ppm	ASTM D5185m		303	---	---
Phosphorus	ppm	ASTM D5185m		2010	---	---
Zinc	ppm	ASTM D5185m		153	---	---
Sulfur	ppm	ASTM D5185m		27408	---	---
Visc @ 40°C	cSt	ASTM D445		53.9	---	---

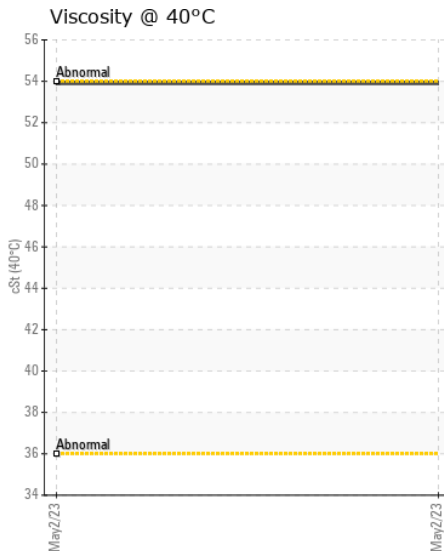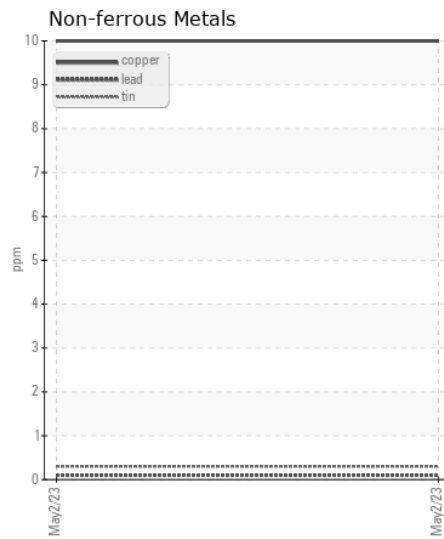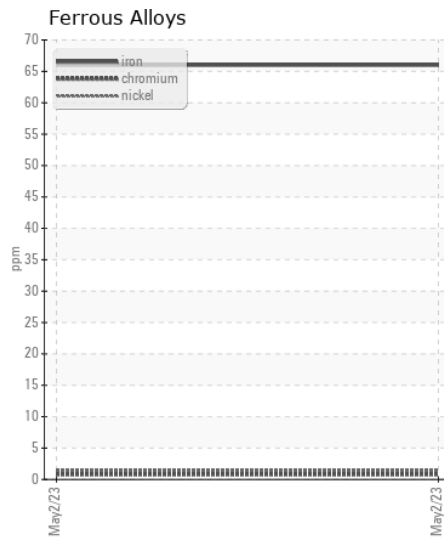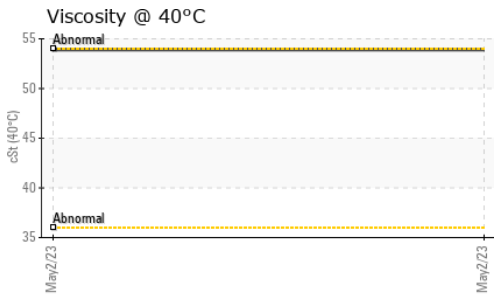

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP383989 **Received** : 08 May 2023
Lab Number : 05840984 **Diagnosed** : 09 May 2023
Unique Number : 10459787 **Diagnostician** : Wes Davis
Test Package : MOB 1

WELLONS CONSTRUCTION
 510 N POWELL AVE
 DUNN, NC
 US 28334
 Contact: GREG WRENCH

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (910)892-6630
 F: (910)892-3046