



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A25F 13541
Component
Bogie/Center Axle
Fluid
VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP383983	VCP231442	---
Sample Date		Client Info		02 May 2023	12 Jul 2018	---
Machine Age	hrs	Client Info		7844	4007	---
Oil Age	hrs	Client Info		4000	4000	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	62	279	---
Chromium	ppm	ASTM D5185m	>20	<1	7	---
Nickel	ppm	ASTM D5185m	>10	1	4	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	1	<1	---
Lead	ppm	ASTM D5185m	>50	<1	2	---
Copper	ppm	ASTM D5185m	>150	10	29	---
Tin	ppm	ASTM D5185m	>20	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	MODER	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	3	7	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	MODER	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	2	---
Boron	ppm	ASTM D5185m		222	168	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		1	15	---
Magnesium	ppm	ASTM D5185m		1	2	---
Calcium	ppm	ASTM D5185m		302	37	---
Phosphorus	ppm	ASTM D5185m		2022	1504	---
Zinc	ppm	ASTM D5185m		153	13	---
Sulfur	ppm	ASTM D5185m		27373	23880	---
Visc @ 40°C	cSt	ASTM D445		53.5	60.7	---

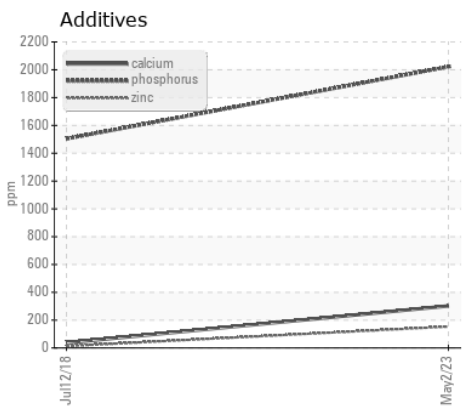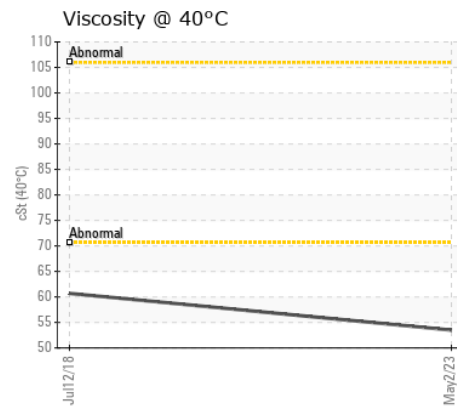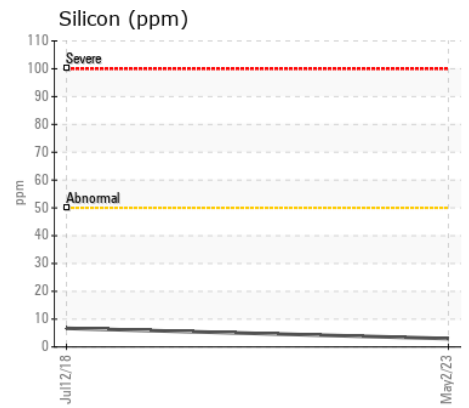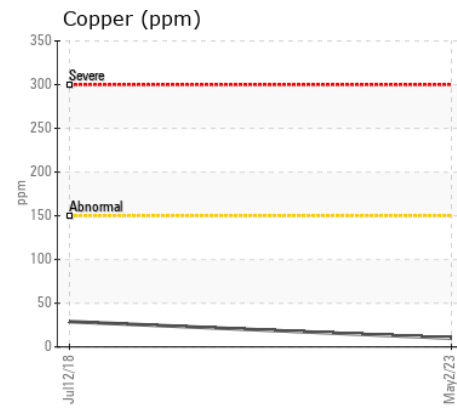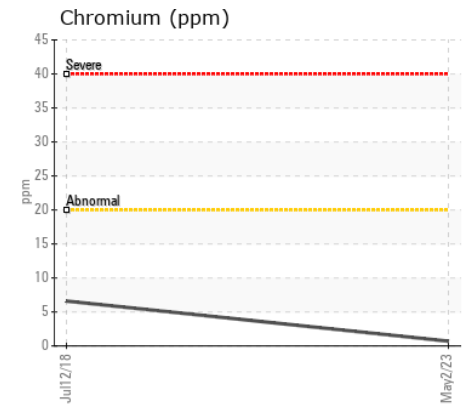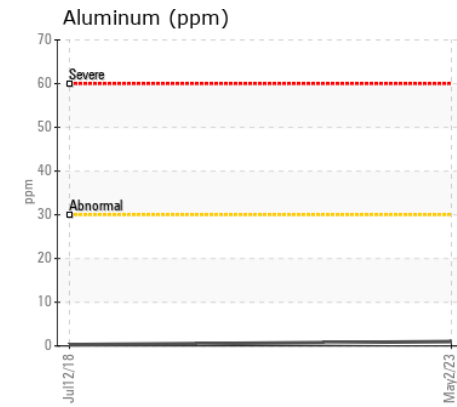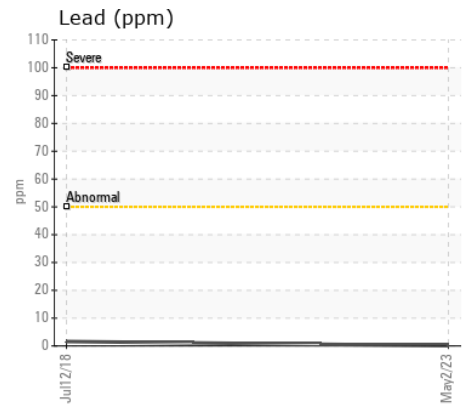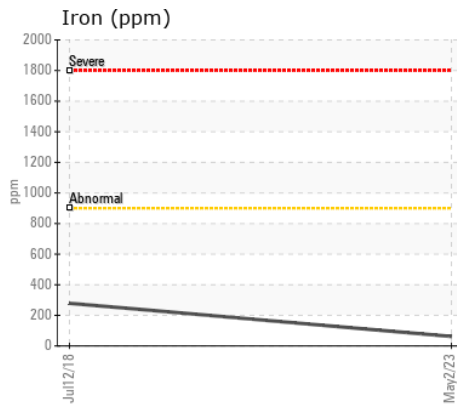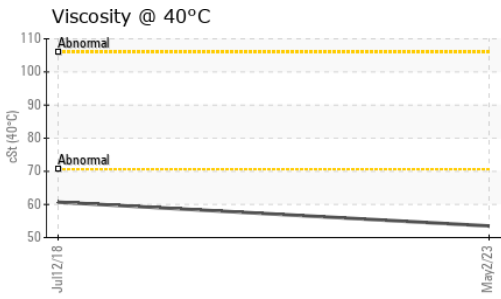

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP383983 **Received** : 08 May 2023
Lab Number : 05840991 **Diagnosed** : 10 May 2023
Unique Number : 10459794 **Diagnostician** : Wes Davis
Test Package : MOB 1

WELLONS CONSTRUCTION
 510 N POWELL AVE
 DUNN, NC
 US 28334
 Contact: GREG WRENCH

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (910)892-6630
 F: (910)892-3046