



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**420020-402465**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0064690</b>	GFL0074651	GFL0064687
Sample Date		Client Info		<b>03 May 2023</b>	15 Mar 2023	16 Feb 2023
Machine Age	hrs	Client Info		<b>4969</b>	4854	4723
Oil Age	hrs	Client Info		<b>115</b>	4854	4723
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	<b>14</b>	13	8
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>8</b>	8	4
Lead	ppm	ASTM D5185m	>45	<b>&lt;1</b>	1	0
Copper	ppm	ASTM D5185m	>85	<b>3</b>	3	2
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	<b>6</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>11</b>	11	6
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.8</b>	7.6	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.8</b>	19.1	18.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	3	2
Boron	ppm	ASTM D5185m	0	<b>4</b>	4	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>57</b>	60	60
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>953</b>	926	873
Calcium	ppm	ASTM D5185m	1070	<b>1081</b>	1135	1044
Phosphorus	ppm	ASTM D5185m	1150	<b>992</b>	1015	929
Zinc	ppm	ASTM D5185m	1270	<b>1271</b>	1225	1120
Sulfur	ppm	ASTM D5185m	2060	<b>3504</b>	2915	3336
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.5</b>	14.7	14.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>6.7</b>	8.1	8.4
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	13.5	13.6

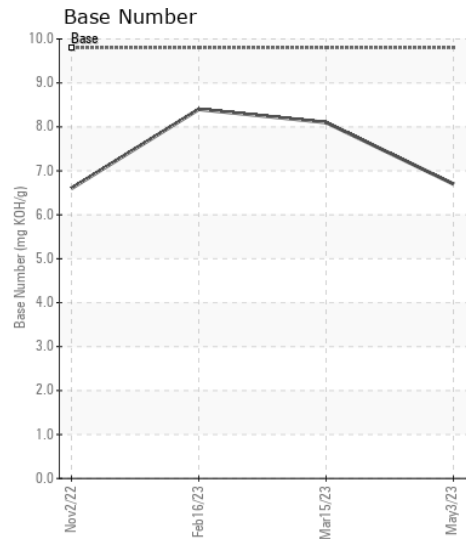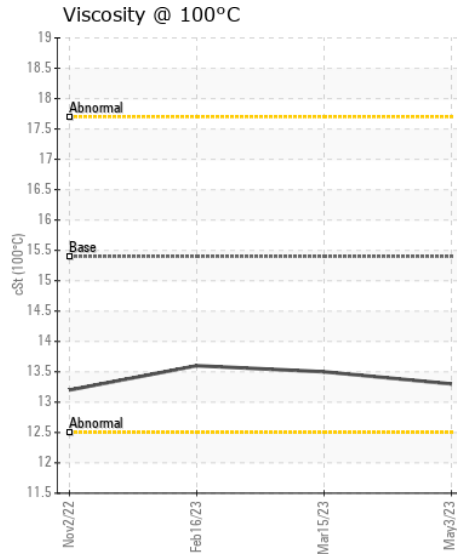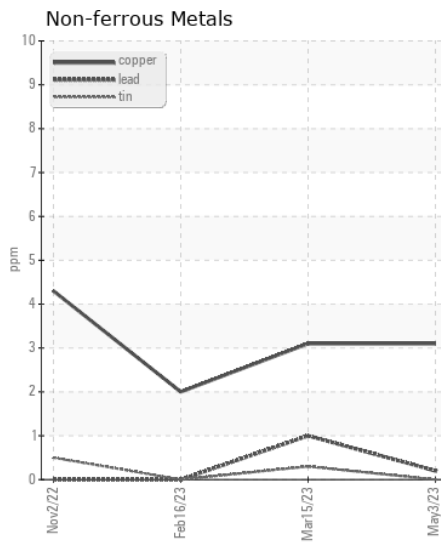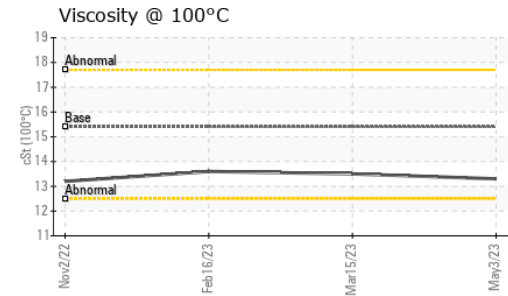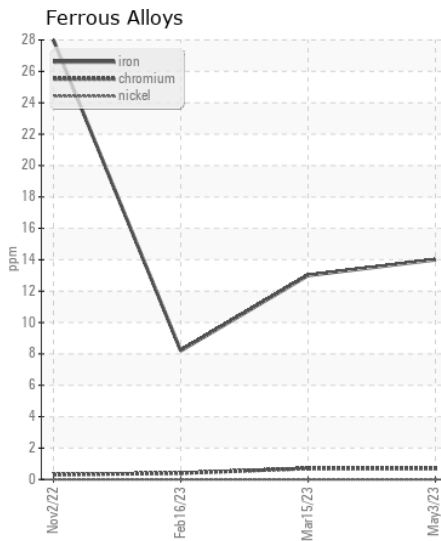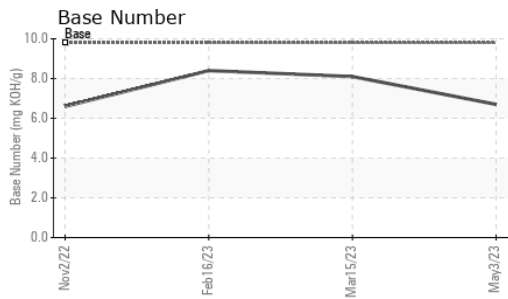

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0064690 **Received** : 08 May 2023  
**Lab Number** : 05841347 **Diagnosed** : 09 May 2023  
**Unique Number** : 10460150 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 814 - Little Rock Hauling**  
 4005 Hwy 161 N.  
 Little Rock, AR  
 US 72117  
 Contact: Brad Koenig  
 bkoenig@gflenv.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)