



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**SYNTEX 75W90 AUTOMOTIVE GEAR OIL**

Component  
**New (Unused) Oil**  
Fluid  
**{not provided} (--- QTS)**

**RECOMMENDATION**

This is a baseline read-out on the submitted sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR05841770	---	---
Sample Date		Client Info		21 Apr 2023	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

**WEAR**











Iron	ppm	ASTM D5185m		0	---	---
Chromium	ppm	ASTM D5185m		0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		6	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		0	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

**CONTAMINATION**

Silicon	ppm	ASTM D5185m		0	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method		NEG	---	---
Particles >4µm		ASTM D7647	>5000	4201	---	---
Particles >6µm		ASTM D7647	>1300	920	---	---
Particles >14µm		ASTM D7647	>160	17	---	---
Particles >21µm		ASTM D7647	>40	3	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/17/11	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---

**FLUID CONDITION**

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		259	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		3	---	---
Calcium	ppm	ASTM D5185m		4	---	---
Phosphorus	ppm	ASTM D5185m		1475	---	---
Zinc	ppm	ASTM D5185m		46	---	---
Sulfur	ppm	ASTM D5185m		25056	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.28	---	---
Visc @ 40°C	cSt	ASTM D445		100.7	---	---
Visc @ 100°C	cSt	ASTM D445		14.72	---	---
Viscosity Index (VI)	Scale	ASTM D2270		151	---	---

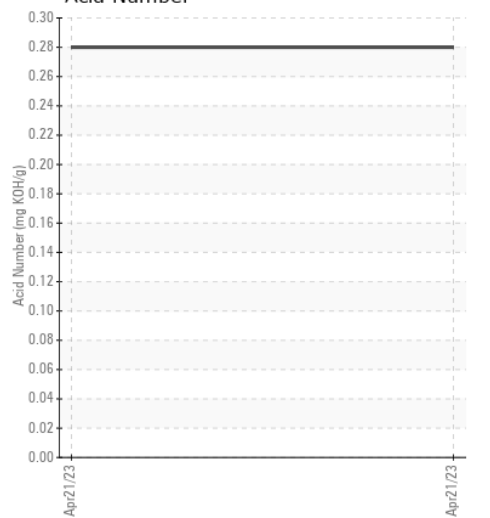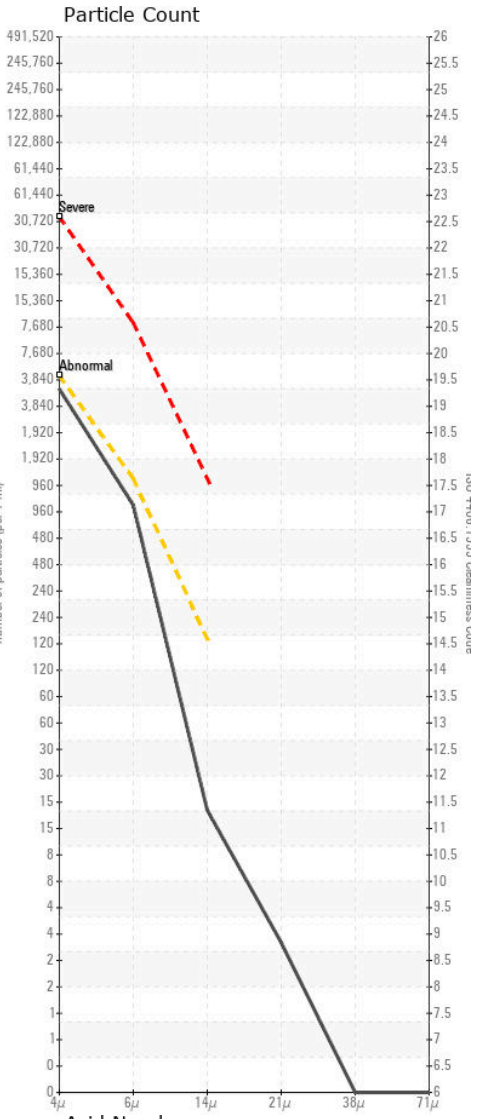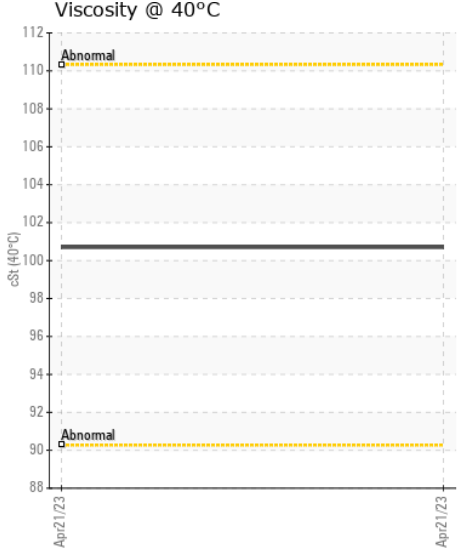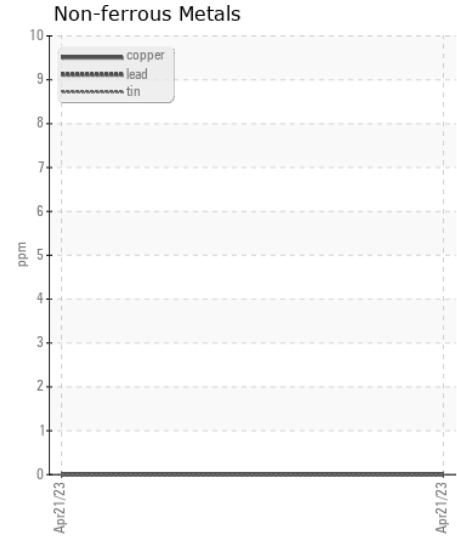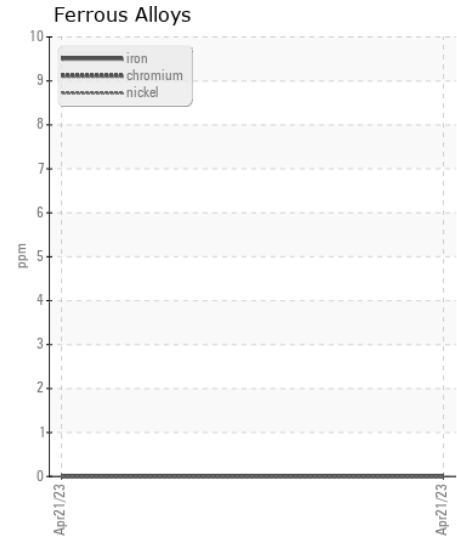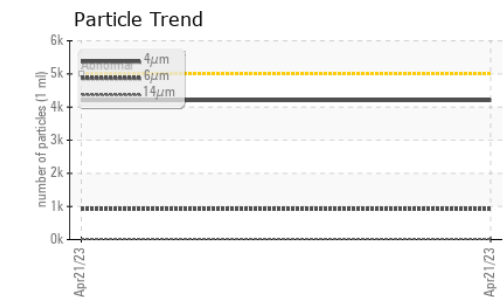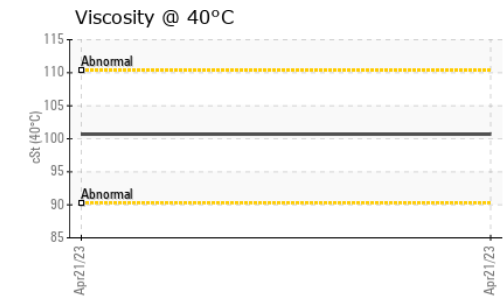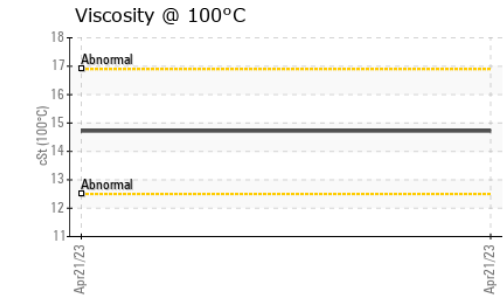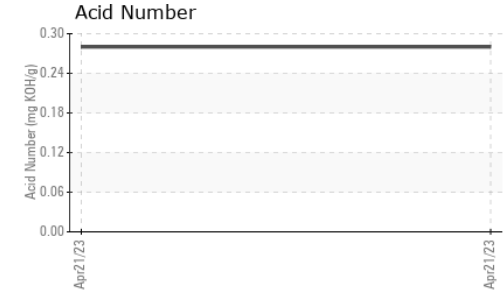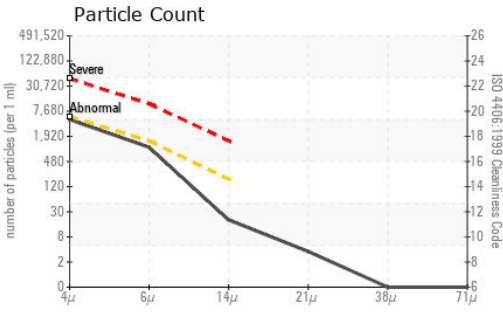

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TR05841770  
**Lab Number** : 05841770  
**Unique Number** : 10465877  
**Test Package** : MOB 2 ( Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, VI )  
*To discuss this sample report, contact Customer Service at 1-800-827-0711.*  
*\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*  
*Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)*

**TEXAS REFINERY CORPORATION**  
 840 NORTH MAIN STREET  
 FORT WORTH, TX  
 US 76164  
 Contact: SETH DAVIS  
 sdavis@texasrefinery.com  
 T: (800)827-0711  
 F: (800)582-3329