



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[SPM540957 OMNISOURCE]
 Machine Id
SENNEBOGEN 830M 830.0.2031
 Component
Rear Right Final Drive
 Fluid
VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP402965	VCP315879	VCP290703
Sample Date		Client Info		12 May 2023	15 Sep 2021	23 Nov 2020
Machine Age	hrs	Client Info		7105	5198	4259
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	46	18	19
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>10	1	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	2	2	4
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	VLITE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	4	2	3
Potassium	ppm	ASTM D5185m	>20	1	0	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	4	6
Boron	ppm	ASTM D5185m	379	126	179	187
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.8	0	0	<1
Manganese	ppm	ASTM D5185m	0.0	1	<1	1
Magnesium	ppm	ASTM D5185m	31	2	0	2
Calcium	ppm	ASTM D5185m	38	73	118	540
Phosphorus	ppm	ASTM D5185m	1077	1976	2104	2256
Zinc	ppm	ASTM D5185m	46	48	57	225
Sulfur	ppm	ASTM D5185m	23526	21975	21346	22033
Visc @ 40°C	cSt	ASTM D445	139	143	142	132

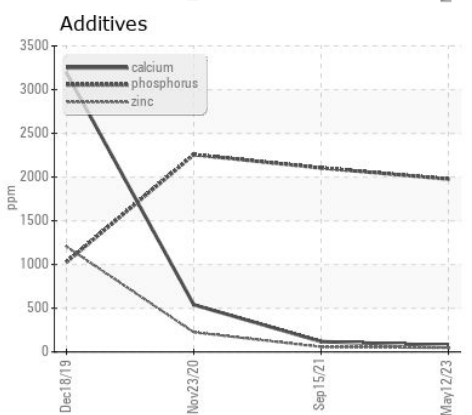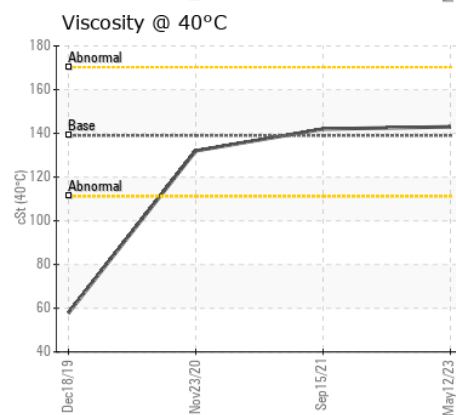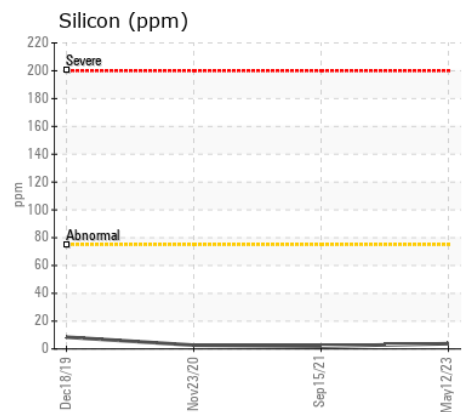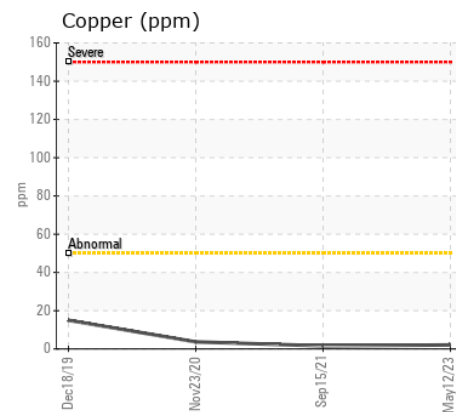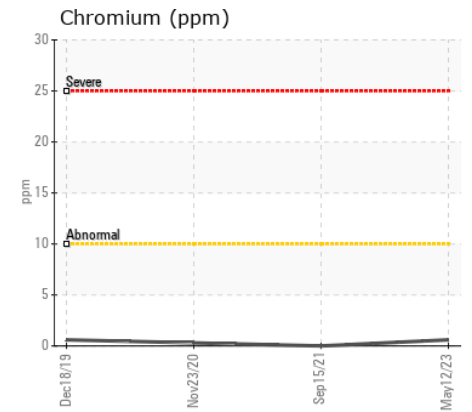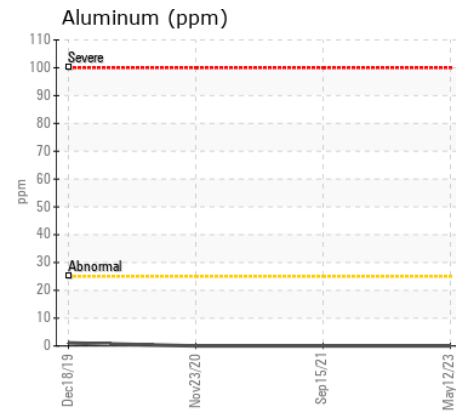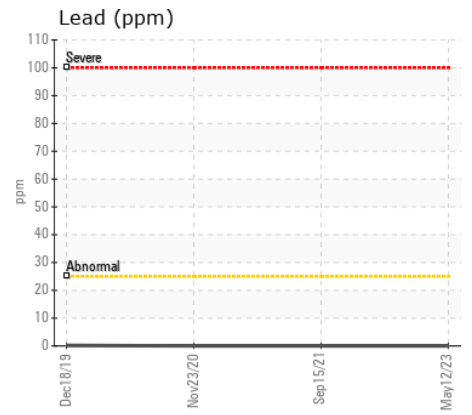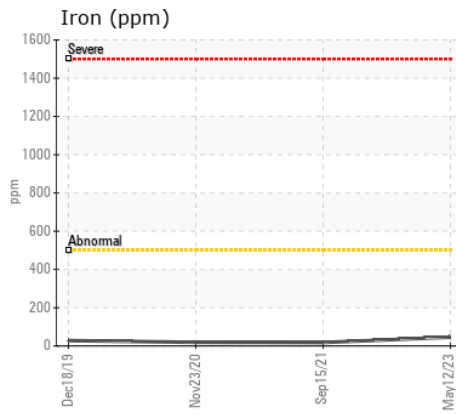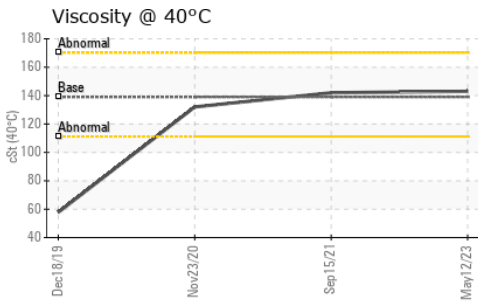

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP402965
Lab Number : 05852136
Unique Number : 10481491
Test Package : MOB 1

Received : 19 May 2023
Tested : 22 May 2023
Diagnosed : 22 May 2023 - Wes Davis

ALTA CONSTRUCTION EQUIPMENT LLC
 G-3283 S. DORT HIGHWAY
 BURTON, MI
 US 48529
 Contact: SHAWN LEWIS
 shawn.lewis@altaequipment.com
 T: (810)347-7011
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)