



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[SPM540957 OMNISOURCE]**  
 Machine Id  
**SENNEBOGEN 830M 830.0.2031**  
 Component  
**Rear Left Final Drive**  
 Fluid  
**VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP402972</b>	VCP315791	VCP290700
Sample Date		Client Info		<b>12 May 2023</b>	15 Sep 2021	23 Nov 2020
Machine Age	hrs	Client Info		<b>7105</b>	5198	4259
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>45</b>	15	27
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	2	<1
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	0	<1
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>50	<b>2</b>	1	4
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	VLITE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>4</b>	2	6
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	0	<1
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	3	6
Boron	ppm	ASTM D5185m	379	<b>130</b>	175	188
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0.8	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m	0.0	<b>1</b>	1	1
Magnesium	ppm	ASTM D5185m	31	<b>2</b>	<1	2
Calcium	ppm	ASTM D5185m	38	<b>73</b>	106	554
Phosphorus	ppm	ASTM D5185m	1077	<b>1993</b>	2041	2261
Zinc	ppm	ASTM D5185m	46	<b>49</b>	54	230
Sulfur	ppm	ASTM D5185m	23526	<b>23360</b>	20587	21876
Visc @ 40°C	cSt	ASTM D445	139	<b>143</b>	144	132

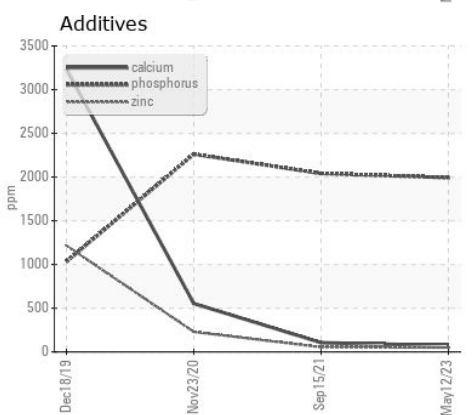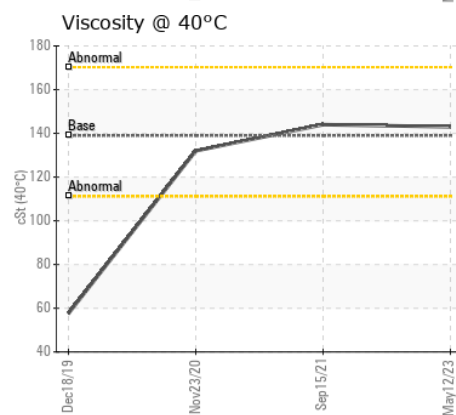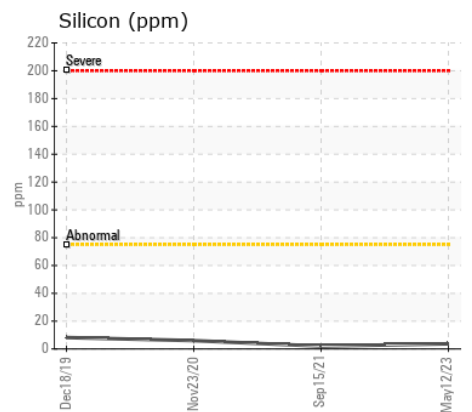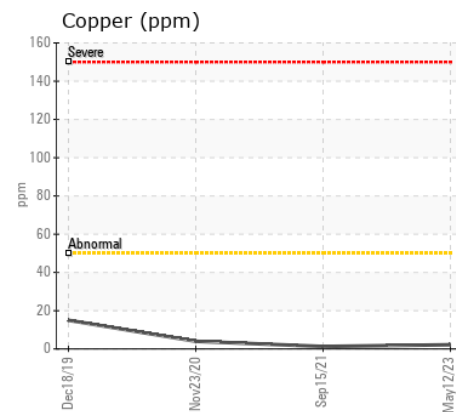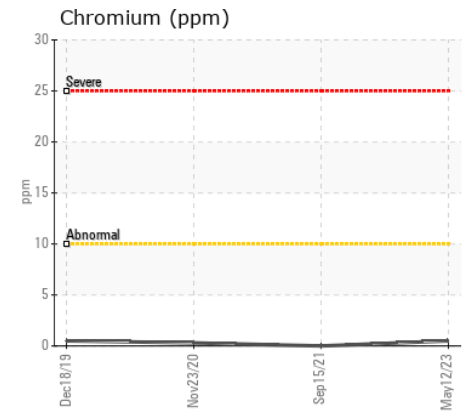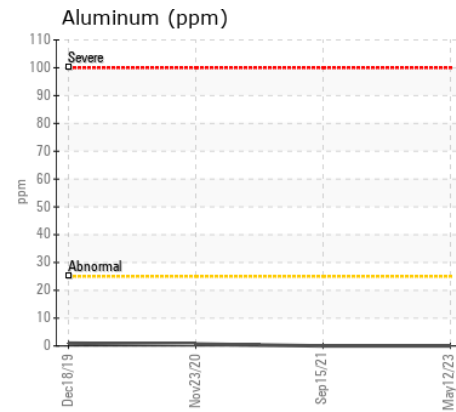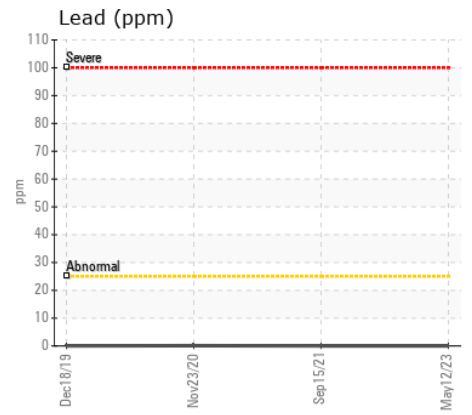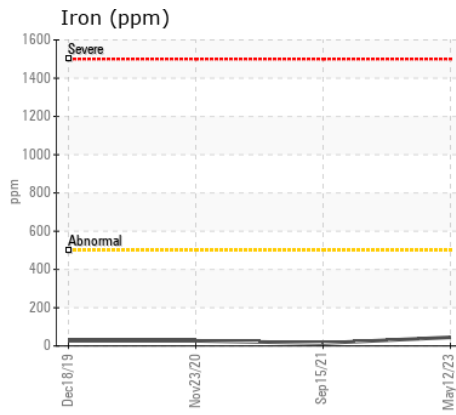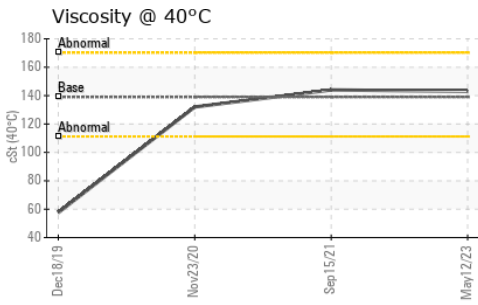

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP402972  
**Lab Number** : 05852137  
**Unique Number** : 10481492  
**Test Package** : MOB 1

**Received** : 19 May 2023  
**Tested** : 22 May 2023  
**Diagnosed** : 22 May 2023 - Wes Davis

**ALTA CONSTRUCTION EQUIPMENT LLC**  
 G-3283 S. DORT HIGHWAY  
 BURTON, MI  
 US 48529  
 Contact: SHAWN LEWIS  
 shawn.lewis@altaequipment.com  
 T: (810)347-7011  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)