



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CASE IH 9370 9370 (S/N JEE0072453)

Component
Diesel Engine

Fluid
TRC MOLY XL PRO-SPEC IV XP 15W40 (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR05852534	---	---
Sample Date		Client Info		17 May 2023	---	---
Machine Age	hrs	Client Info		8004	---	---
Oil Age	hrs	Client Info		300	---	---
Filter Age	hrs	Client Info		300	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>65	30	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>10	3	---	---
Lead	ppm	ASTM D5185m	>30	4	---	---
Copper	ppm	ASTM D5185m	>30	12	---	---
Tin	ppm	ASTM D5185m	>4	2	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	10	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>6	1.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		5	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		142	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		62	---	---
Calcium	ppm	ASTM D5185m		4944	---	---
Phosphorus	ppm	ASTM D5185m		1013	---	---
Zinc	ppm	ASTM D5185m		1260	---	---
Sulfur	ppm	ASTM D5185m		5313	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		14.96	---	---
Visc @ 100°C	cSt	ASTM D445		17.0	---	---

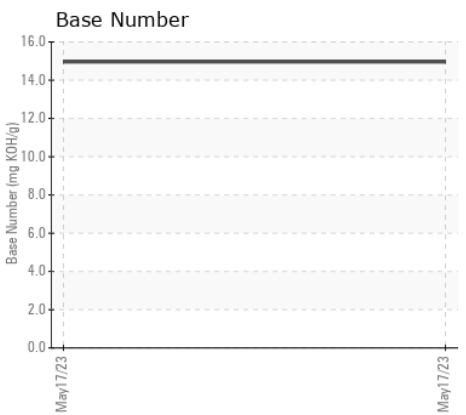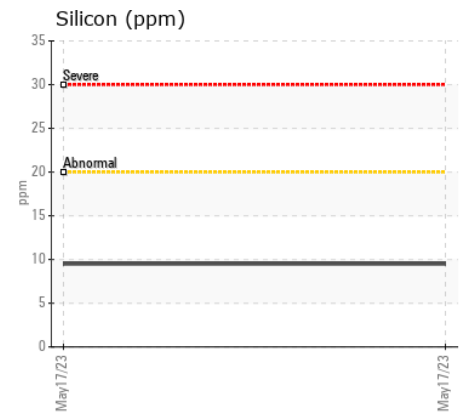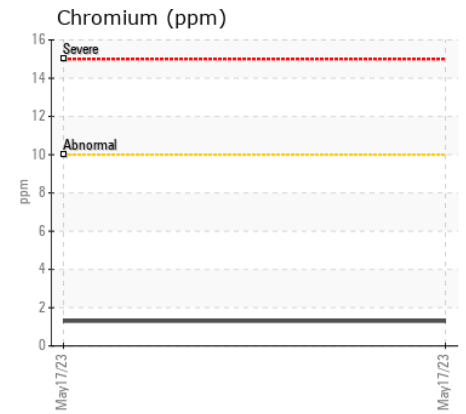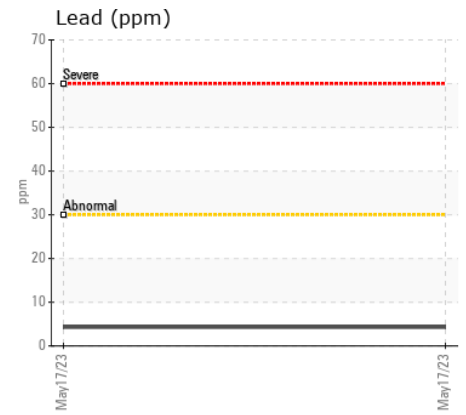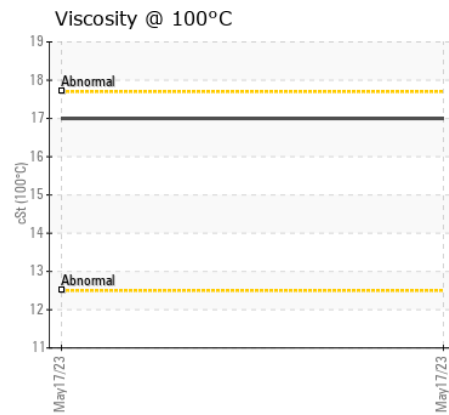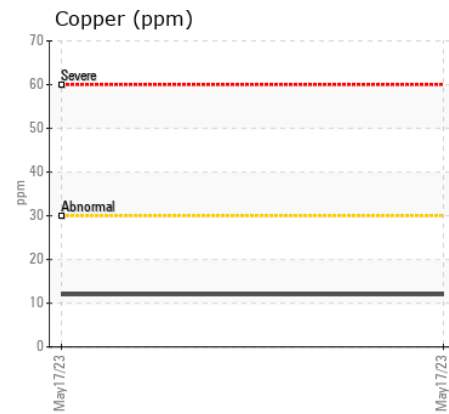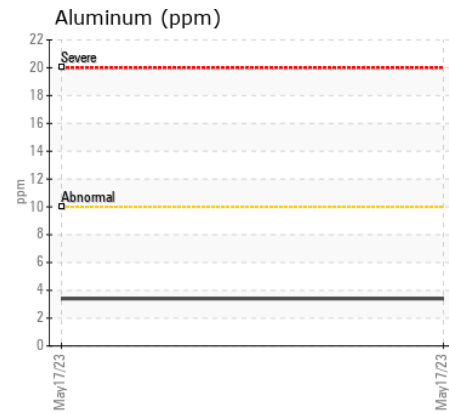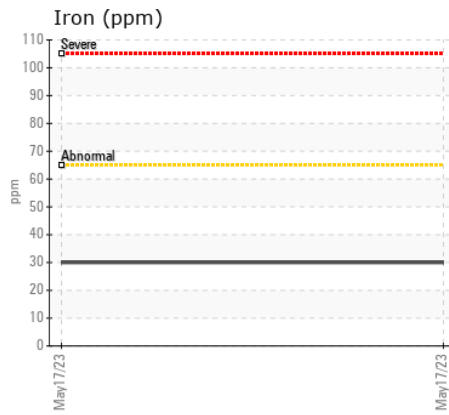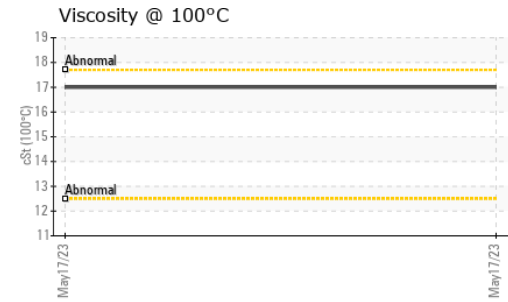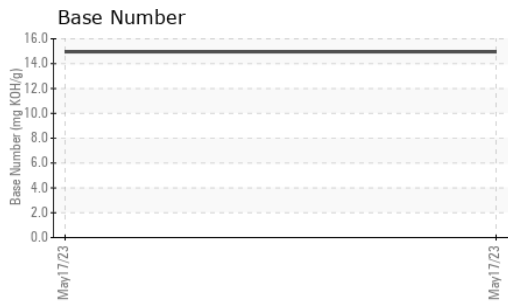

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR05852534 **Received** : 19 May 2023
Lab Number : 05852534 **Diagnosed** : 22 May 2023
Unique Number : 10481889 **Diagnostician** : Wes Davis
Test Package : MOB 2

SLATER BROS FARM LLC
 10001 CANAL RD
 HEBRON, OH
 US 43025
 Contact: LARRY HUMPHREY

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: