



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 1T0325GKJNJ421438
Component
Diesel Engine
Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 0W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0172809	JR0174769	---
Sample Date		Client Info		30 May 2023	16 May 2023	---
Machine Age	hrs	Client Info		452	455	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	26	48	---
Chromium	ppm	ASTM D5185m	>11	0	1	---
Nickel	ppm	ASTM D5185m	>5	0	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	5	14	---
Lead	ppm	ASTM D5185m	>26	0	2	---
Copper	ppm	ASTM D5185m	>26	64	▲ 100	---
Tin	ppm	ASTM D5185m	>4	0	1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	39	▲ 42	---
Potassium	ppm	ASTM D5185m	>20	0	0	---
Fuel		WC Method	>2.1	<1.0	▲ 2.6	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.5	0.6	---
Nitration	Abs/cm	*ASTM D7624	>20	9.7	10.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.1	25.9	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	10	13	---
Boron	ppm	ASTM D5185m		194	179	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		255	258	---
Manganese	ppm	ASTM D5185m		0	1	---
Magnesium	ppm	ASTM D5185m		741	694	---
Calcium	ppm	ASTM D5185m		1684	1850	---
Phosphorus	ppm	ASTM D5185m		832	839	---
Zinc	ppm	ASTM D5185m		1043	1058	---
Sulfur	ppm	ASTM D5185m		3435	3448	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.8	22.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	7.9	7.8	---
Visc @ 100°C	cSt	ASTM D445	14	12.4	● 11.7	---

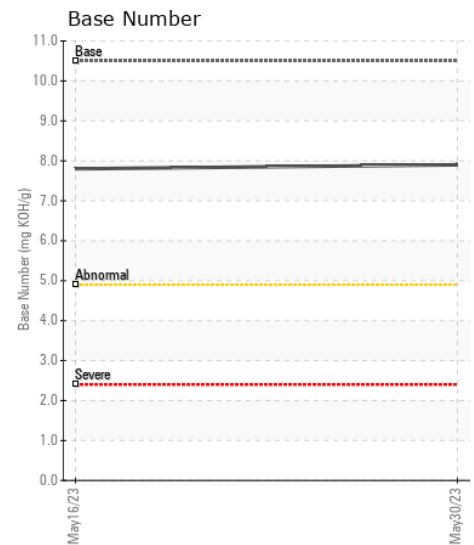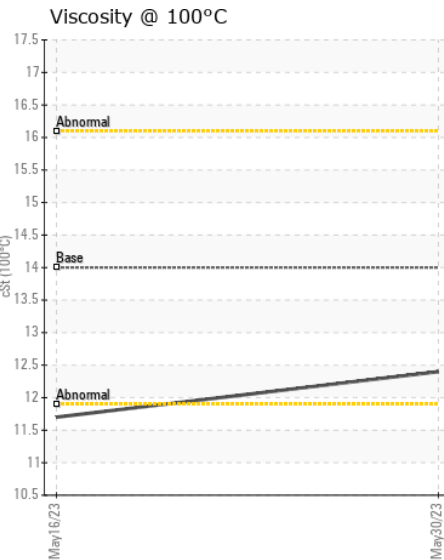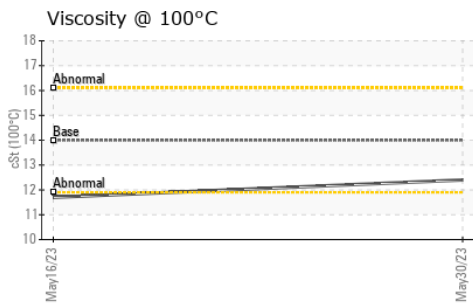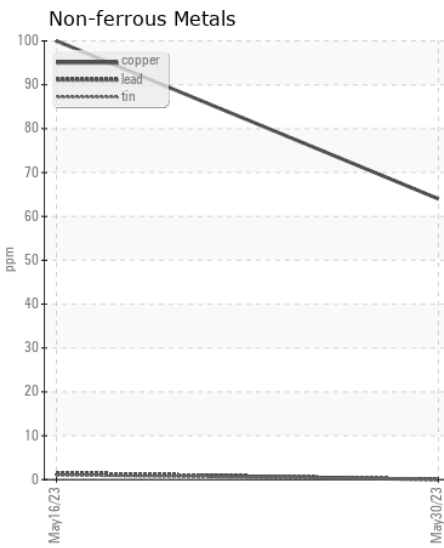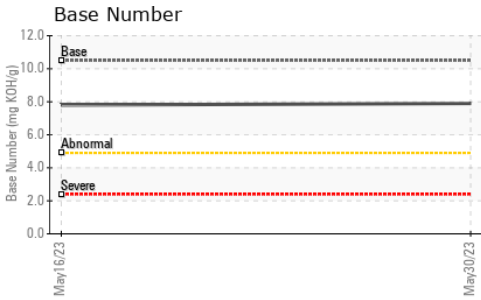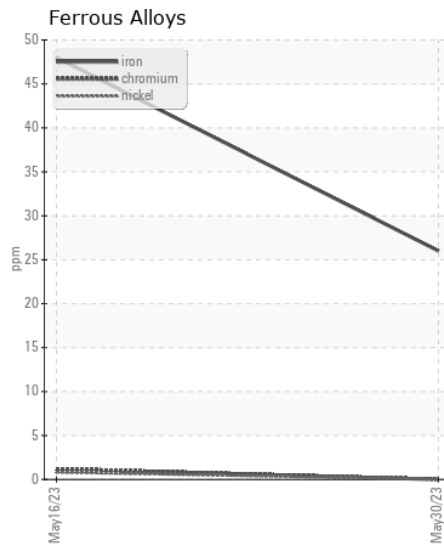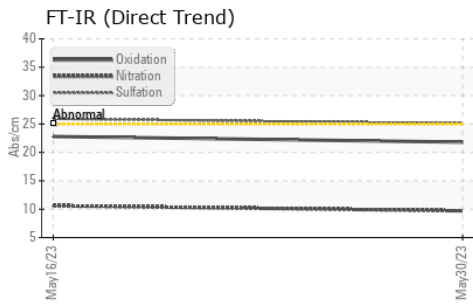

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0172809 **Received** : 31 May 2023
Lab Number : 05860667 **Tested** : 01 Jun 2023
Unique Number : 10495132 **Diagnosed** : 01 Jun 2023 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ALLSITE CONTRACTING
 11128 INDUSTRIAL RD
 MANASSAS, VA
 US 20109
 Contact: DAVE PARKER
 dave.parker@allsiteco.com
 T: (703)361-2499
 F: (703)361-6169