



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH T-800 2021 KENWORTH BRETT (S/N 431813)

Component
Diesel Engine

Fluid
TRC MOLY XL PROSPEC III 15W40 (11 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR05861426	TR05653354	TR05356367
Sample Date		Client Info		19 May 2023	29 Jun 2022	04 Sep 2021
Machine Age	mls	Client Info		0	0	40563
Oil Age	mls	Client Info		27757	23460	13832
Filter Age	mls	Client Info		27757	23460	13832
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	47	46	27
Chromium	ppm	ASTM D5185m	>20	4	6	4
Nickel	ppm	ASTM D5185m	>2	0	<1	0
Titanium	ppm	ASTM D5185m	>2	<1	<1	0
Silver	ppm	ASTM D5185m	>2	<1	<1	0
Aluminum	ppm	ASTM D5185m	>20	24	60	63
Lead	ppm	ASTM D5185m	>40	2	3	3
Copper	ppm	ASTM D5185m	>330	2	6	4
Tin	ppm	ASTM D5185m	>15	2	2	2
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	13	12	12
Potassium	ppm	ASTM D5185m	>20	52	135	121
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>6	0.8	0.7	0.4
Nitration	Abs/cm	*ASTM D7624	>20	13.4	13.1	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.5	26.7	24.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	5	3
Boron	ppm	ASTM D5185m		6	21	228
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		130	127	114
Manganese	ppm	ASTM D5185m		1	1	1
Magnesium	ppm	ASTM D5185m		59	90	707
Calcium	ppm	ASTM D5185m	4500	4585	4180	1615
Phosphorus	ppm	ASTM D5185m		938	842	712
Zinc	ppm	ASTM D5185m	1400	1140	1056	963
Sulfur	ppm	ASTM D5185m		5097	4630	2499
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.4	14.8	18.9
Base Number (BN)	mg KOH/g	ASTM D2896	15	12.28	10.6	8.51
Visc @ 100°C	cSt	ASTM D445	15.5	15.0	14.5	13.2

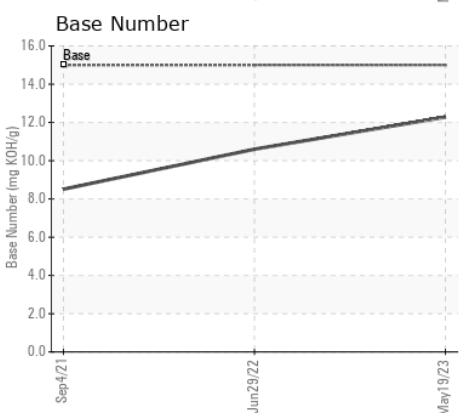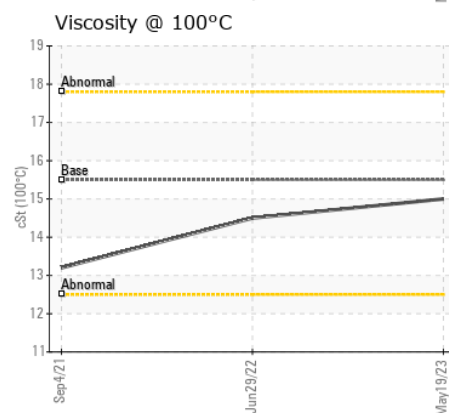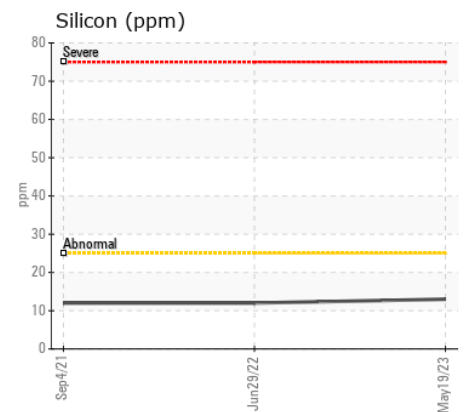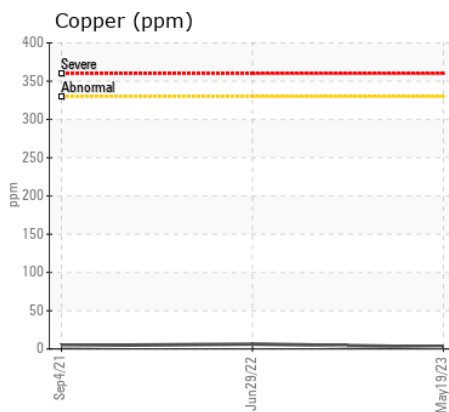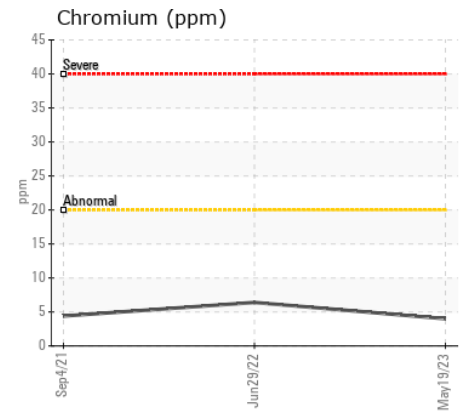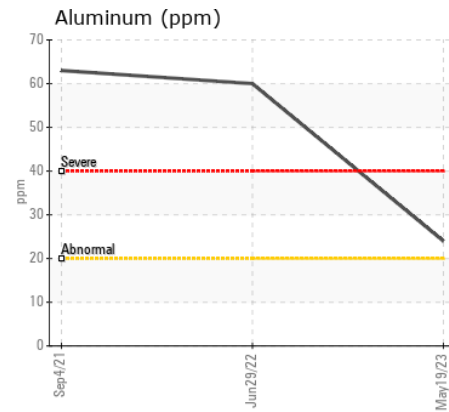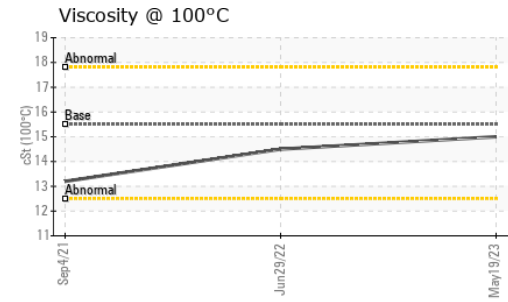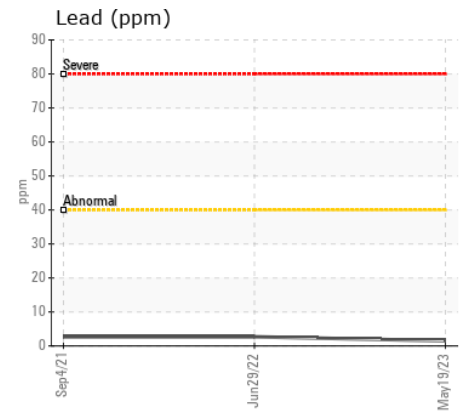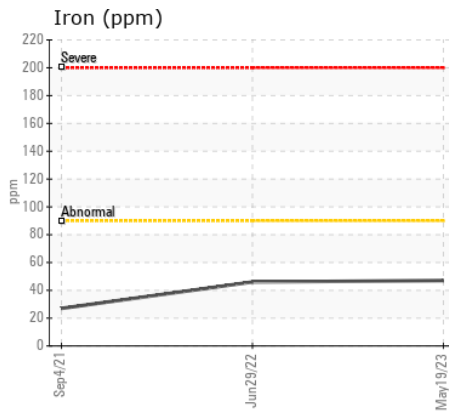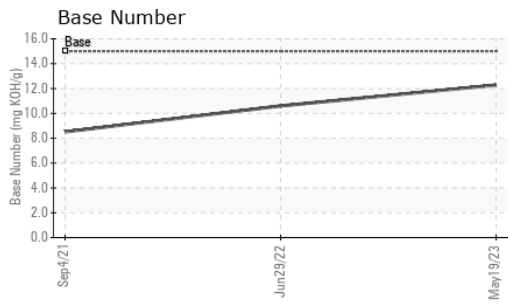

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR05861426 **Received** : 31 May 2023
Lab Number : 05861426 **Diagnosed** : 02 Jun 2023
Unique Number : 10495891 **Diagnostician** : Sean Felton
Test Package : MOB 2

HANNEMAN FOREST PRODUCTS
 13551 GREENWOOD RD
 GLEN ALLEN, VA
 US 23059
 Contact: TIM SMITH

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: