



OIL ANALYSIS REPORT

WEAR
CONTAMINATION
FLUID CONDITION

ATTENTION
ABNORMAL
NORMAL



Area
Store 1 - Cowen
Machine Id
JOHN DEERE 135G 1FF135GXHKF501620
Component
Right Propel Gearbox
Fluid
JOHN DEERE HY-GARD HYD/TRANS (4 QTS)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION


Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0041441	LEC0033032	LEC0027168
Sample Date		Client Info		31 May 2023	05 Oct 2022	24 Mar 2022
Machine Age	hrs	Client Info		1594	1056	527
Oil Age	hrs	Client Info		538	529	527
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		None	N/A	N/A
Sample Status				ABNORMAL	NORMAL	ATTENTION
PQ		ASTM D8184		106	40	103
Iron	ppm	ASTM D5185m	>1250	132	79	129
Chromium	ppm	ASTM D5185m	>10	2	2	4
Nickel	ppm	ASTM D5185m	>10	<1	2	0
Titanium	ppm	ASTM D5185m		1	<1	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m		15	5	10
Lead	ppm	ASTM D5185m		0	0	0
Copper	ppm	ASTM D5185m		<1	<1	<1
Tin	ppm	ASTM D5185m		0	0	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	MODER	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m		54	28	45
Potassium	ppm	ASTM D5185m	>20	4	6	4
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m		1	2	<1
Boron	ppm	ASTM D5185m	6	10	33	59
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	1	<1	<1
Manganese	ppm	ASTM D5185m		2	2	4
Magnesium	ppm	ASTM D5185m	145	92	88	1
Calcium	ppm	ASTM D5185m	3570	3318	3016	23
Phosphorus	ppm	ASTM D5185m	1290	966	931	522
Zinc	ppm	ASTM D5185m	1640	1183	1066	38
Sulfur	ppm	ASTM D5185m		4747	6572	12726
Visc @ 40°C	cSt	ASTM D445	57.0	57.7	65.1	183


▲ Silicon (ppm)

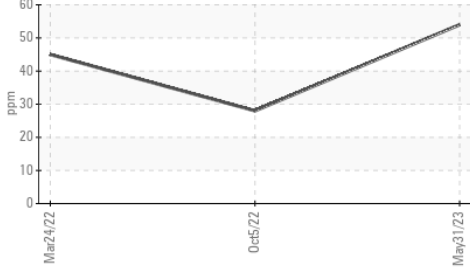


● Aluminum (ppm)

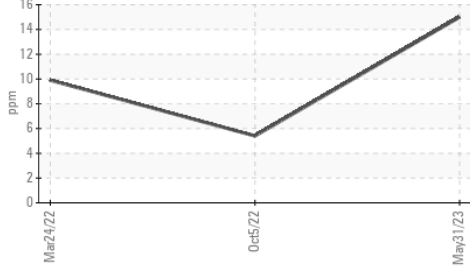


Viscosity @ 40°C

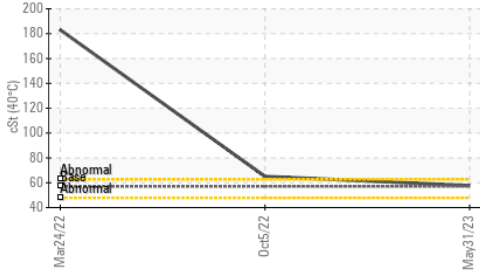


PQ

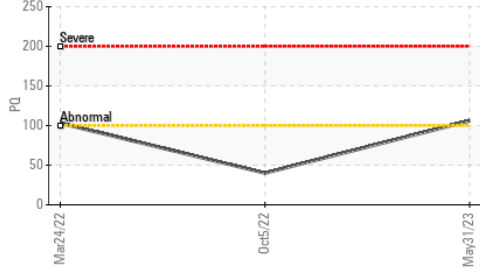


Ferrous Alloys

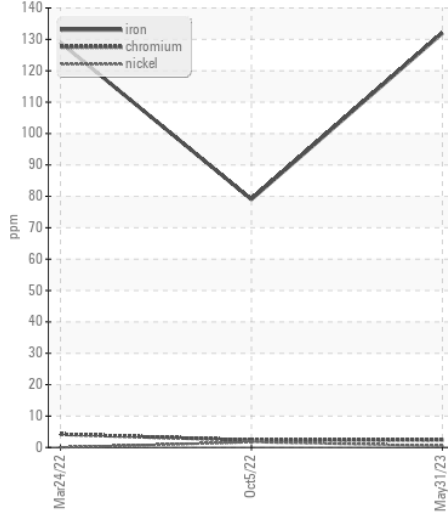


Non-ferrous Metals

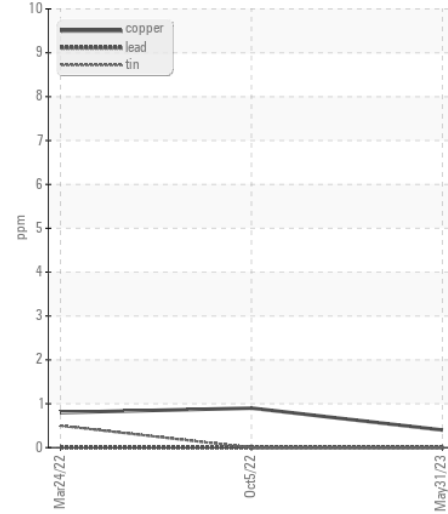

Viscosity @ 40°C

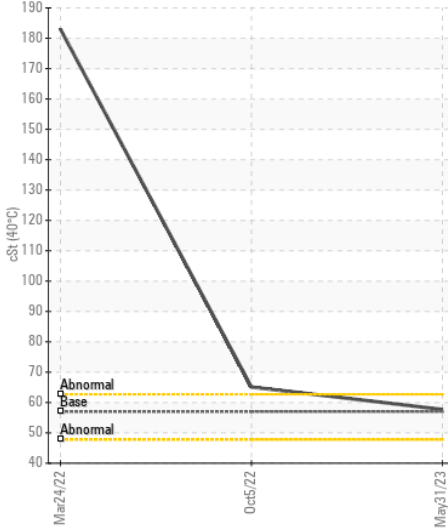

PQ

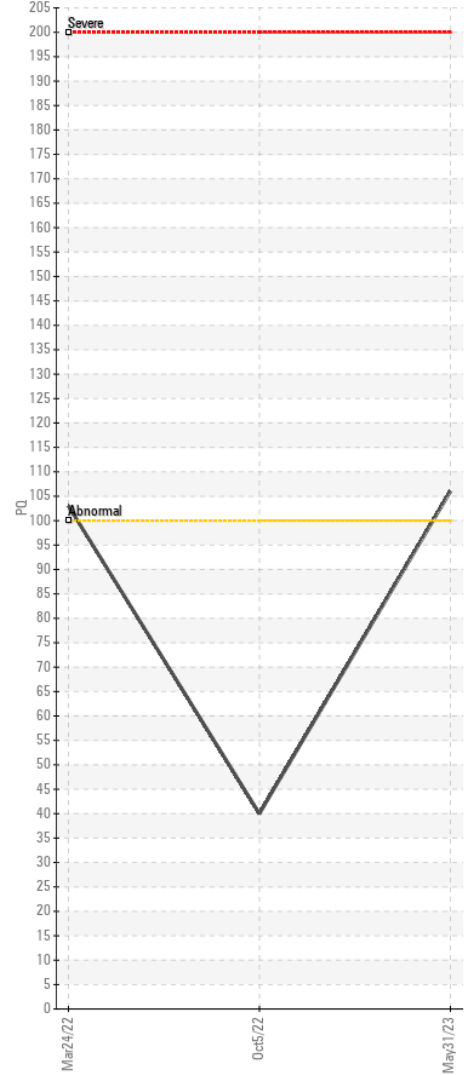

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0041441 **Received** : 02 Jun 2023
Lab Number : 05863221 **Tested** : 05 Jun 2023
Unique Number : 10497686 **Diagnosed** : 05 Jun 2023 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570