



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 5 - Cross Lanes [RO#139821]
Machine Id
JOHN DEERE 1050K 1T01050PCJF323379
Component
Hydrostatic
Fluid
JOHN DEERE HYDRAU (39 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0035505	LECP187437	---
Sample Date		Client Info		08 Jun 2023	30 Nov 2018	---
Machine Age	hrs	Client Info		643	604	---
Oil Age	hrs	Client Info		643	604	---
Filter Age	hrs	Client Info		643	604	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		12	15	---
Iron	ppm	ASTM D5185m	>31	4	4	---
Chromium	ppm	ASTM D5185m	>9	0	0	---
Nickel	ppm	ASTM D5185m	>5	<1	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	0	0	---
Lead	ppm	ASTM D5185m	>11	1	<1	---
Copper	ppm	ASTM D5185m	>41	10	5	---
Tin	ppm	ASTM D5185m	>5	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	<1	1	---
Potassium	ppm	ASTM D5185m	>20	2	6	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647	>20000	7024	---	---
Particles >6µm		ASTM D7647	>5000	1012	---	---
Particles >14µm		ASTM D7647	>640	45	---	---
Particles >21µm		ASTM D7647	>160	11	---	---
Particles >38µm		ASTM D7647	>40	0	---	---
Particles >71µm		ASTM D7647	>10	0	---	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	20/17/13	---	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	1	1	---
Boron	ppm	ASTM D5185m		0	1	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		0	1	---
Calcium	ppm	ASTM D5185m	87	87	80	---
Phosphorus	ppm	ASTM D5185m	727	682	576	---
Zinc	ppm	ASTM D5185m	900	884	750	---
Sulfur	ppm	ASTM D5185m	1500	1970	1306	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.62	---	---
Visc @ 40°C	cSt	ASTM D445	65	59.4	59.17	---

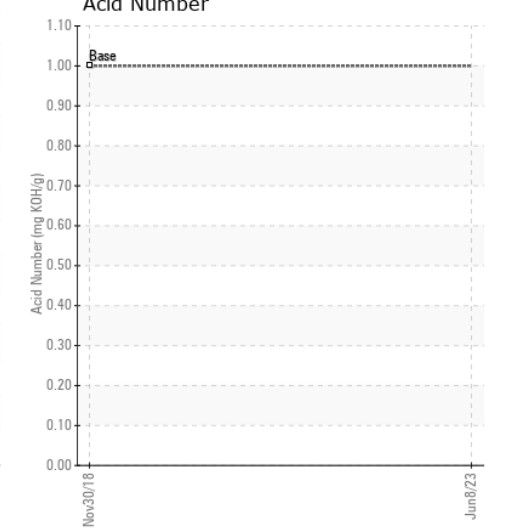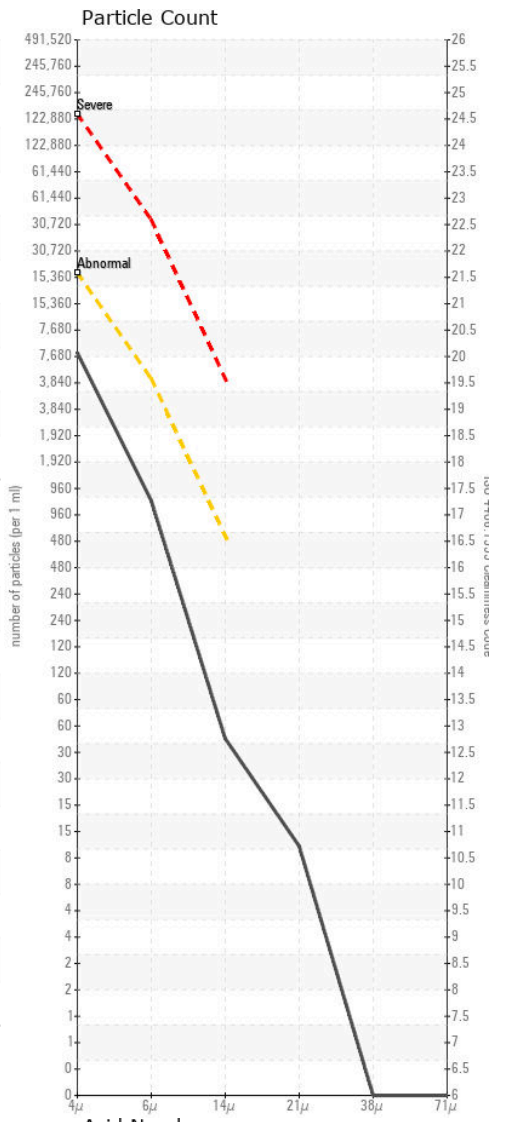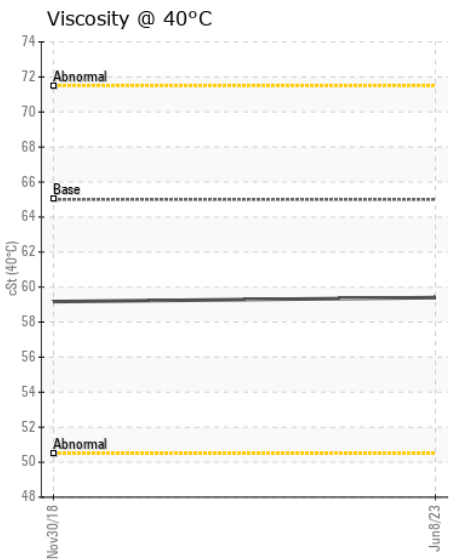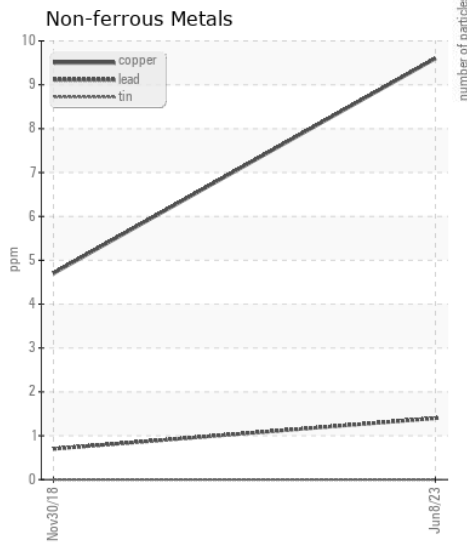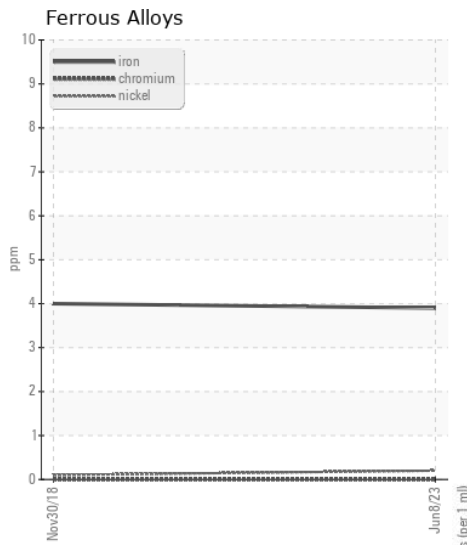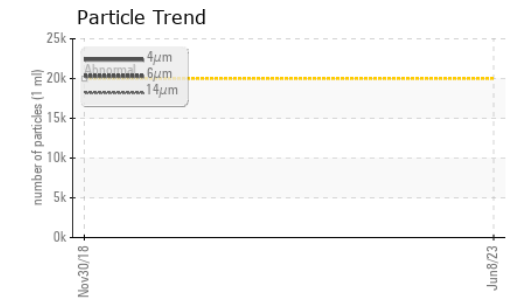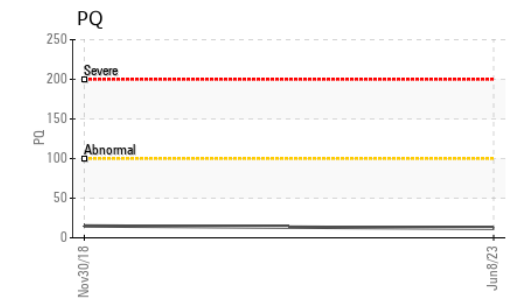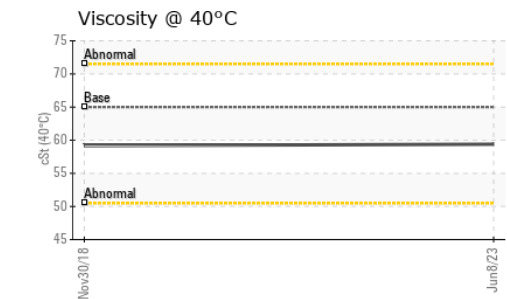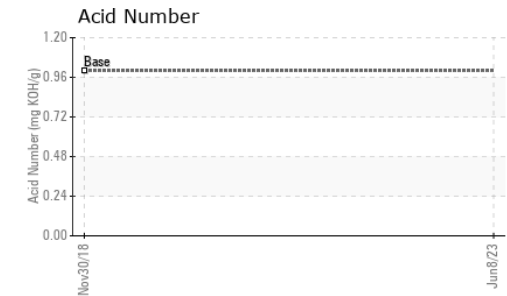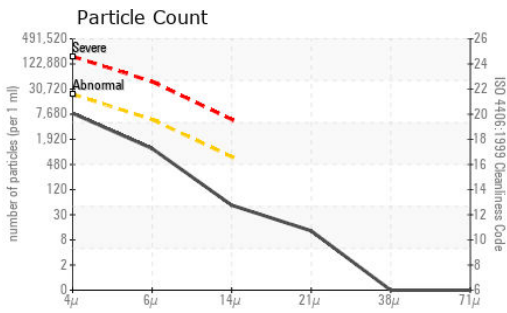

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0035505 **Received** : 12 Jun 2023
Lab Number : 05870802 **Tested** : 13 Jun 2023
Unique Number : 10510586 **Diagnosed** : 14 Jun 2023 - Don Baldrige
Test Package : CONST (Additional Tests: PQ, PrtCount)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (740)373-5570