



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
HIAB 3580269
Component
Hydraulic System
Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.











CONTAMINATION

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0741582	---	---
Sample Date		Client Info		01 Jun 2023	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185m	>20	<1	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	0	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>75	1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>20	<1	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 16869	---	---
Particles >6µm		ASTM D7647	>1300	▲ 2317	---	---
Particles >14µm		ASTM D7647	>160	129	---	---
Particles >21µm		ASTM D7647	>40	27	---	---
Particles >38µm		ASTM D7647	>10	2	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 21/18/14	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		<1	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		2	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		10	---	---
Calcium	ppm	ASTM D5185m		77	---	---
Phosphorus	ppm	ASTM D5185m		337	---	---
Zinc	ppm	ASTM D5185m		438	---	---
Sulfur	ppm	ASTM D5185m		2789	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.39	---	---
Visc @ 40°C	cSt	ASTM D445		35.3	---	---
Visc @ 100°C	cSt	ASTM D445		6.7	---	---
Viscosity Index (VI)	Scale	ASTM D2270		149	---	---

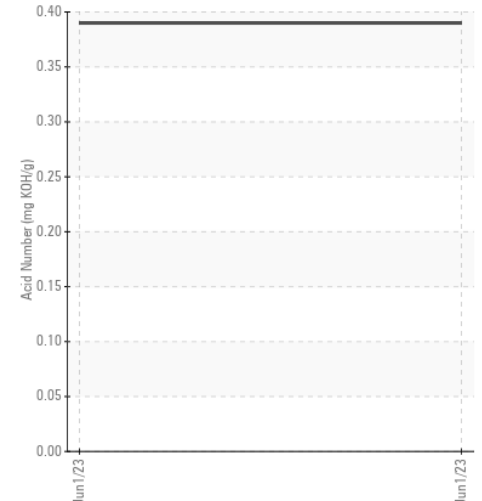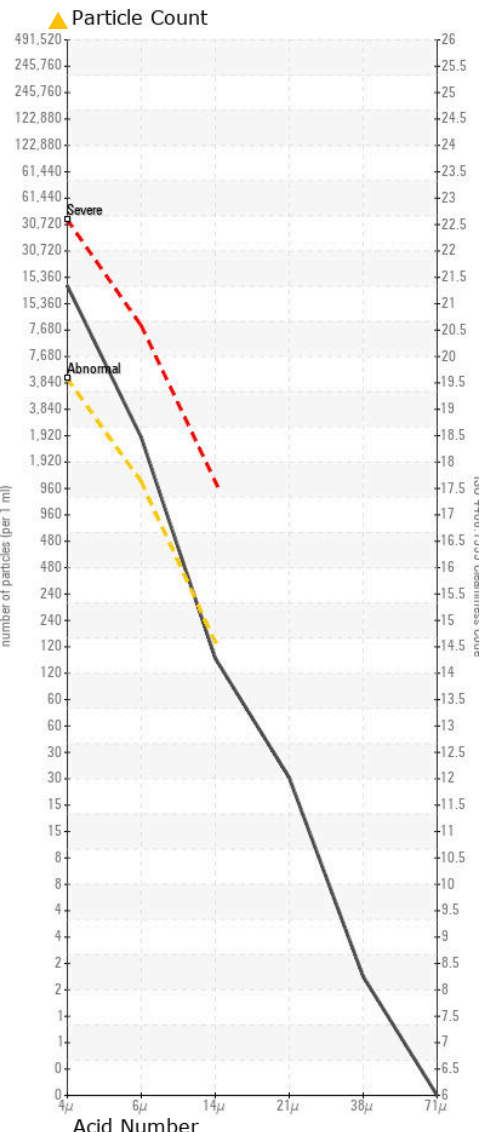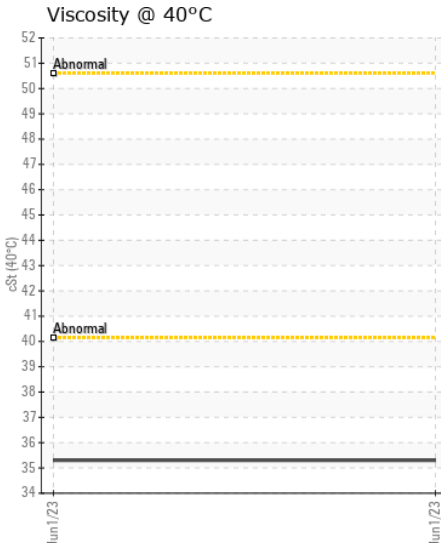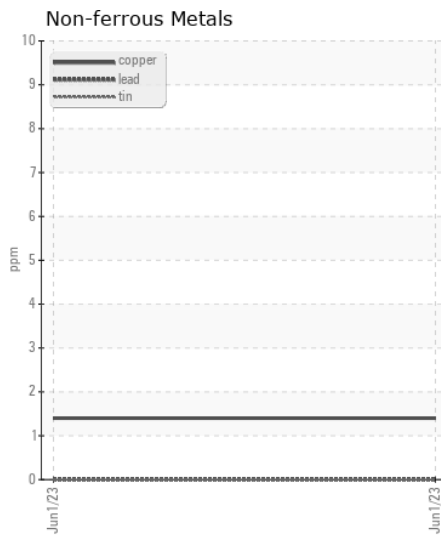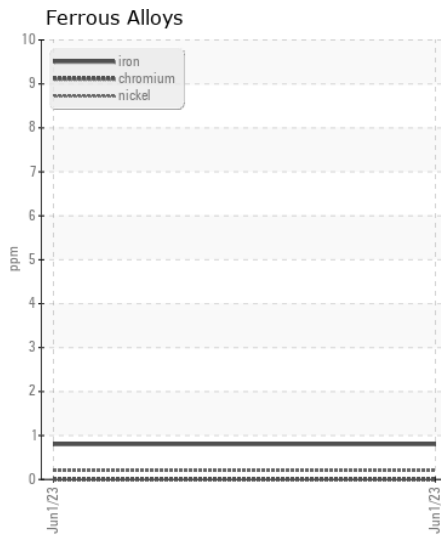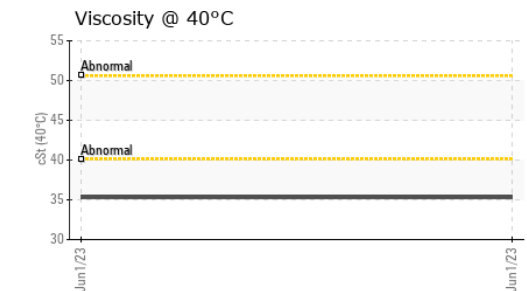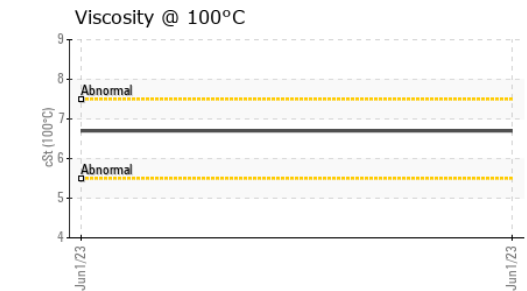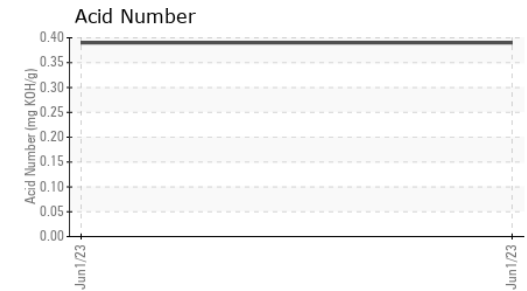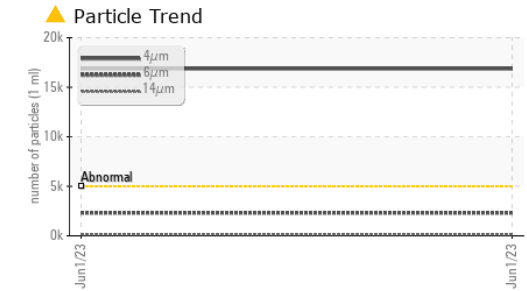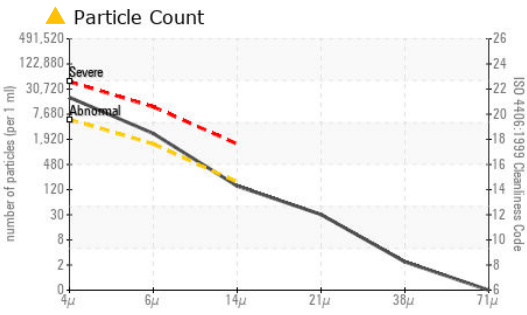

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0741582 **Received** : 14 Jun 2023
Lab Number : 05873884 **Diagnosed** : 16 Jun 2023
Unique Number : 10518987 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: KV100, VI)

HIAB USA - Carnegie
 200 1ST AVE
 CARNEGIE, PA
 US 15106
 Contact: GARY SPANGLE
 gary.spangle@hiab.com
 T: (419)482-6000
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)