



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[W57329]

Machine Id

JOHN DEERE 410L 1T0410LXLJF327803

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W57329)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0171816	JR0102608	JR0072515
Sample Date		Client Info		14 Jun 2023	15 Sep 2021	18 Dec 2020
Machine Age	hrs	Client Info		2494	1995	1631
Oil Age	hrs	Client Info		2130	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	18	6	5
Chromium	ppm	ASTM D5185m	>11	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	0	<1	<1
Aluminum	ppm	ASTM D5185m	>31	7	7	2
Lead	ppm	ASTM D5185m	>26	3	<1	<1
Copper	ppm	ASTM D5185m	>26	2	2	2
Tin	ppm	ASTM D5185m	>4	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	9	6	3
Potassium	ppm	ASTM D5185m	>20	2	1	<1
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.6	7.8	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.2	20.4	17.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	2	<1	2
Boron	ppm	ASTM D5185m		165	239	41
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		213	226	24
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		869	724	304
Calcium	ppm	ASTM D5185m		1471	1458	2114
Phosphorus	ppm	ASTM D5185m		945	881	1007
Zinc	ppm	ASTM D5185m		1197	1001	1154
Sulfur	ppm	ASTM D5185m		4138	2452	3380
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.6	15.1	11
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.9	8.6	8.5
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	13.3	13.3

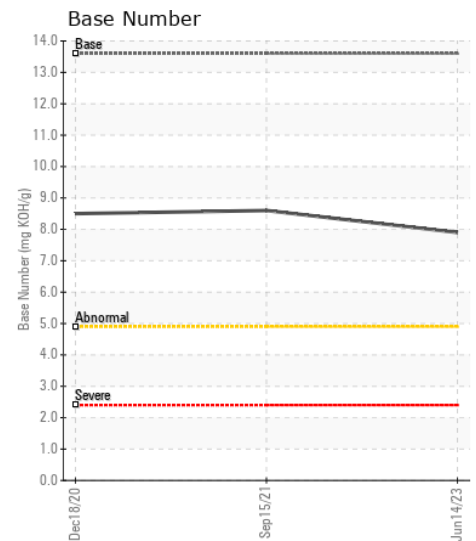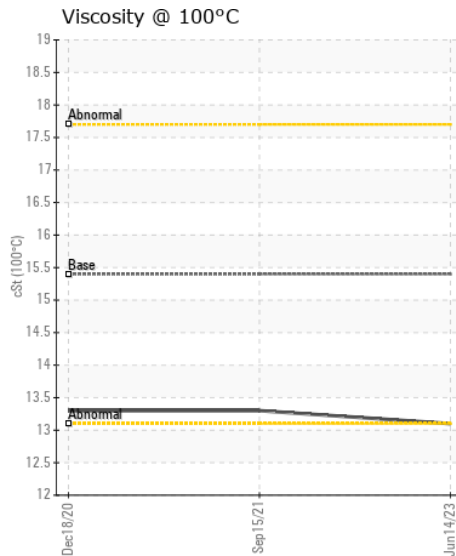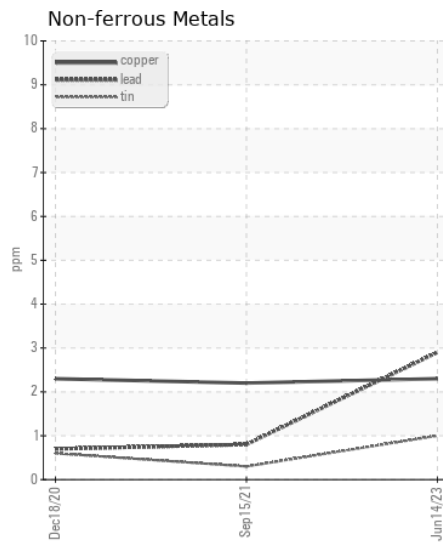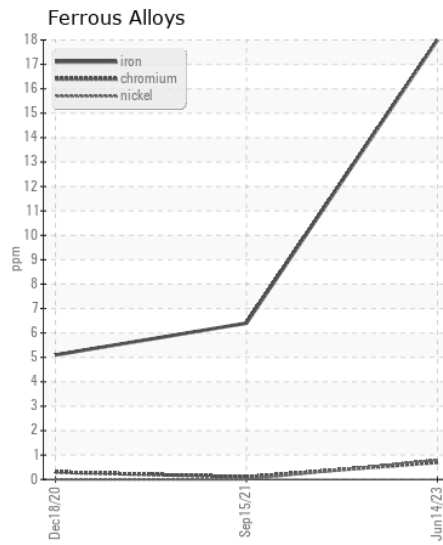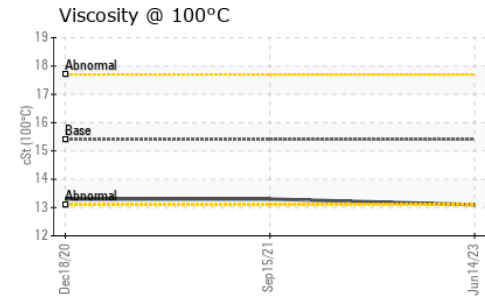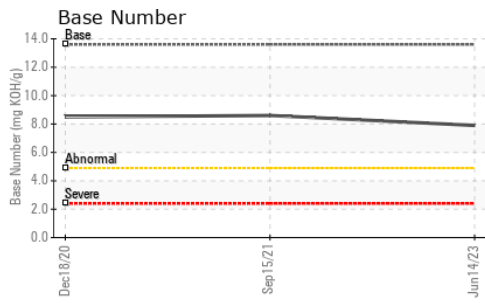

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0171816 **Received** : 16 Jun 2023
Lab Number : 05875372 **Tested** : 16 Jun 2023
Unique Number : 10520475 **Diagnosed** : 18 Jun 2023 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)