



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Machine Id  
**3351225**  
 Component  
**Hydraulic System**  
 Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0640397	---	---
Sample Date		Client Info		17 Jun 2023	---	---
Machine Age	yrs	Client Info		0	---	---
Oil Age	yrs	Client Info		0	---	---
Filter Age	yrs	Client Info		1	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	12	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	0	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>75	3	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION











There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	<1	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 5234	---	---
Particles >6µm		ASTM D7647	>1300	651	---	---
Particles >14µm		ASTM D7647	>160	37	---	---
Particles >21µm		ASTM D7647	>40	12	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 20/17/12	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m		58	---	---
Phosphorus	ppm	ASTM D5185m		334	---	---
Zinc	ppm	ASTM D5185m		428	---	---
Sulfur	ppm	ASTM D5185m		3457	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.30	---	---
Visc @ 40°C	cSt	ASTM D445		35.1	---	---
Visc @ 100°C	cSt	ASTM D445		6.4	---	---
Viscosity Index (VI)	Scale	ASTM D2270		135	---	---

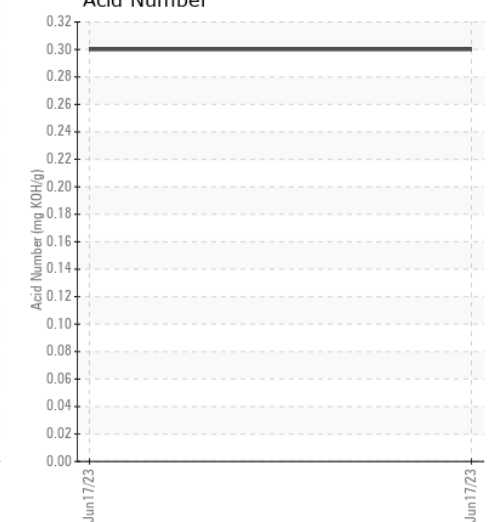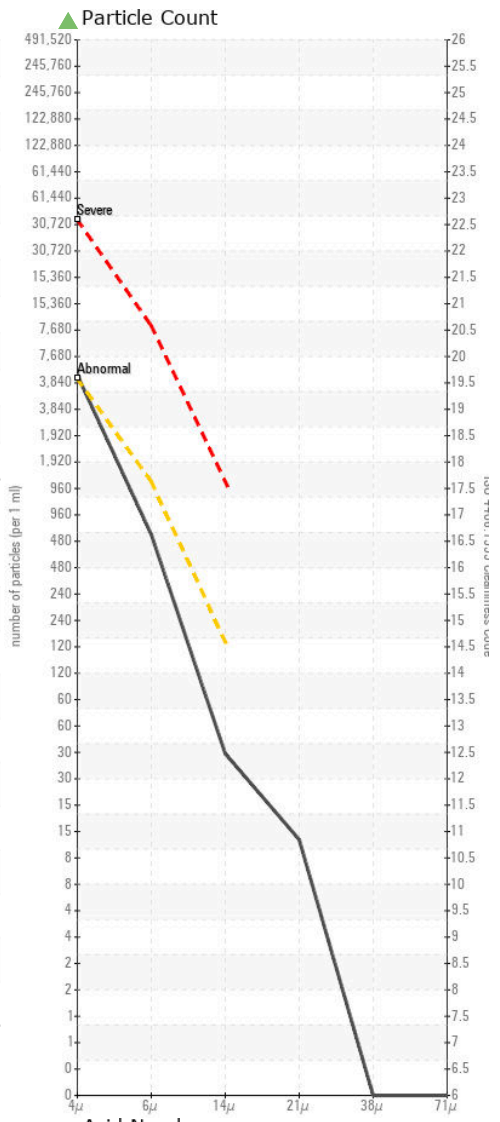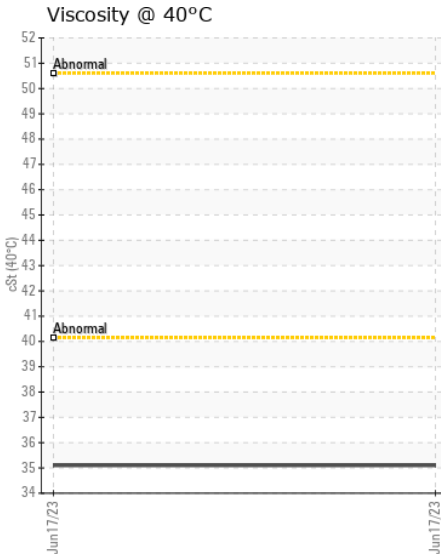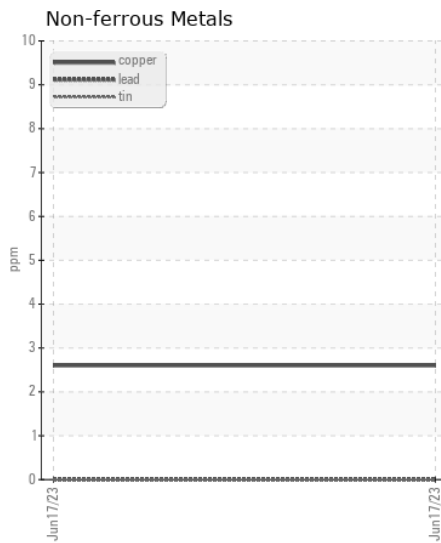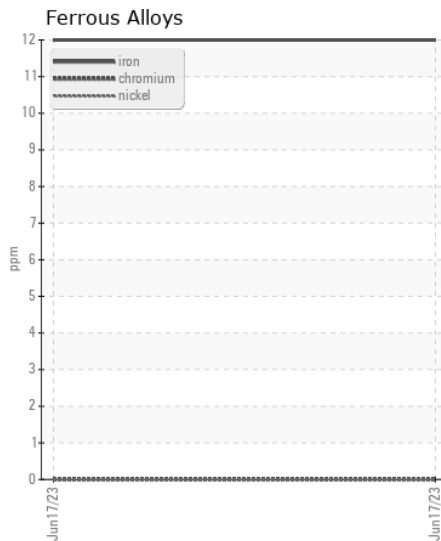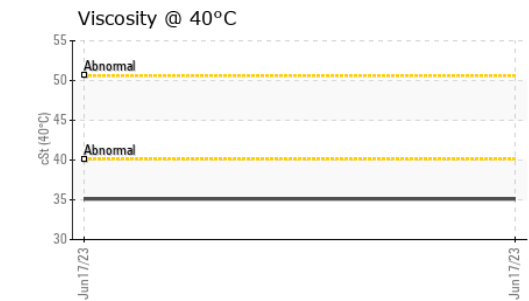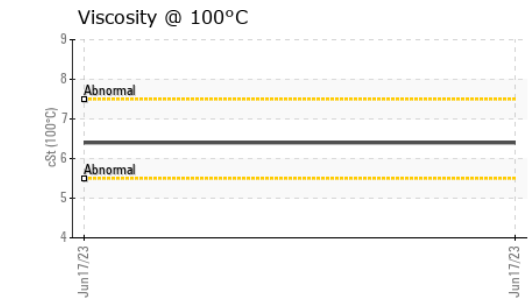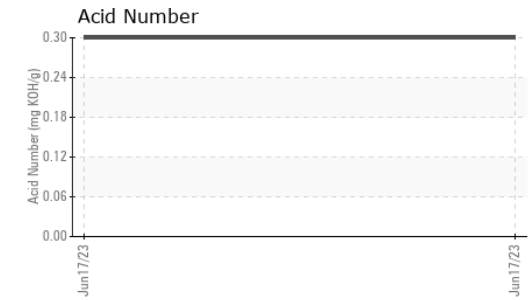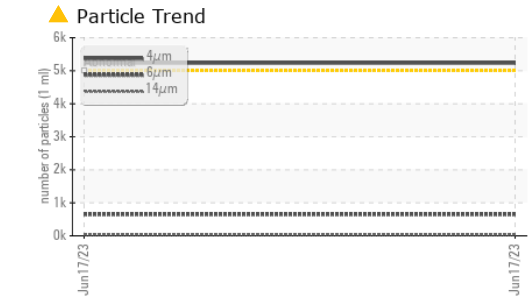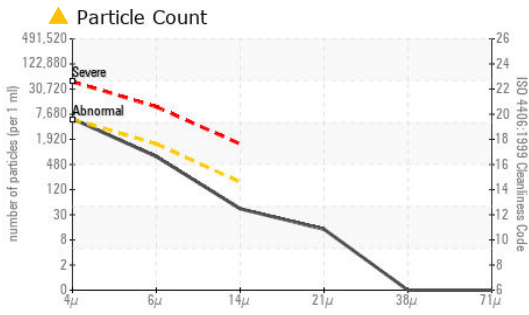

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0640397 **Received** : 16 Jun 2023  
**Lab Number** : 05875540 **Diagnosed** : 19 Jun 2023  
**Unique Number** : 10520643 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: KV100, VI )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**HIAB USA - Oshkosh**  
 1359 PLAINVIEW DR, SUITE 2  
 OSHKOSH, WI  
 US 54904  
 Contact: BRYON EHLERT  
 bryon.ehlert@hiab.com  
 T: (224)808-6000  
 F: