



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>ATTENTION</b>



Area  
**Store 4 - Fairmont**  
Machine Id  
**JOHN DEERE 210G 1FF210GXJNF530237**  
Component  
**Left Propel Gearbox**  
Fluid  
**JOHN DEERE GL-5 80W90 (2 GAL)**

## RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0042387</b>	LEC0020043	---
Sample Date		Client Info		<b>22 Jun 2023</b>	23 Dec 2022	---
Machine Age	hrs	Client Info		<b>1001</b>	473	---
Oil Age	hrs	Client Info		<b>528</b>	473	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>None</b>	N/A	---
Sample Status				<b>ATTENTION</b>	NORMAL	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>223</b>	238	---
Iron	ppm	ASTM D5185m	>1250	<b>340</b>	267	---
Chromium	ppm	ASTM D5185m	>10	<b>6</b>	6	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m		<b>4</b>	2	---
Lead	ppm	ASTM D5185m		<b>0</b>	0	---
Copper	ppm	ASTM D5185m		<b>1</b>	1	---
Tin	ppm	ASTM D5185m		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	MODER	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>34</b>	21	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		<b>0</b>	0	---
Boron	ppm	ASTM D5185m		<b>41</b>	73	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>6</b>	6	---
Magnesium	ppm	ASTM D5185m		<b>69</b>	<1	---
Calcium	ppm	ASTM D5185m		<b>2513</b>	8	---
Phosphorus	ppm	ASTM D5185m		<b>851</b>	505	---
Zinc	ppm	ASTM D5185m		<b>886</b>	15	---
Sulfur	ppm	ASTM D5185m		<b>7791</b>	18536	---
Visc @ 40°C	cSt	ASTM D445		<b>75.8</b>	185	---

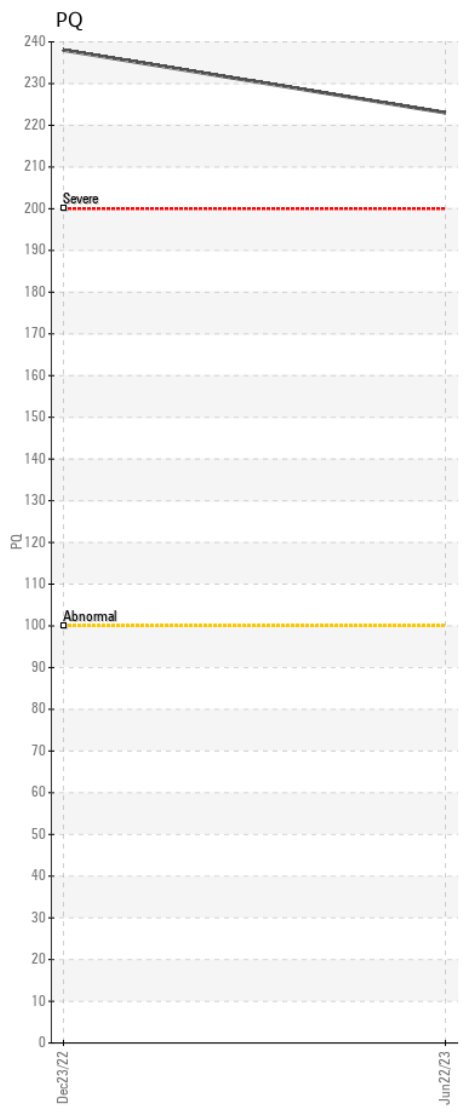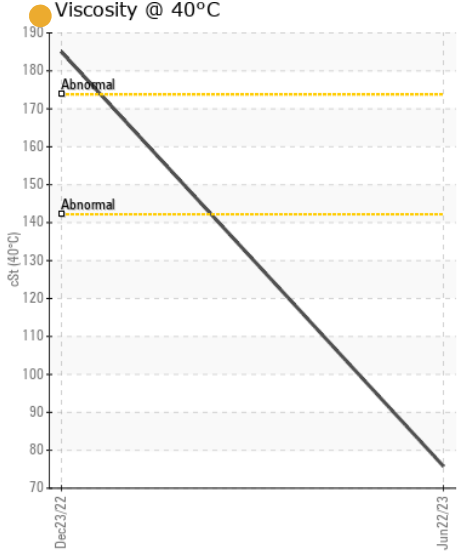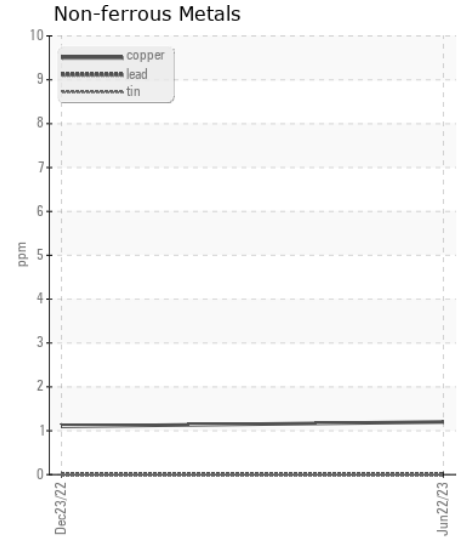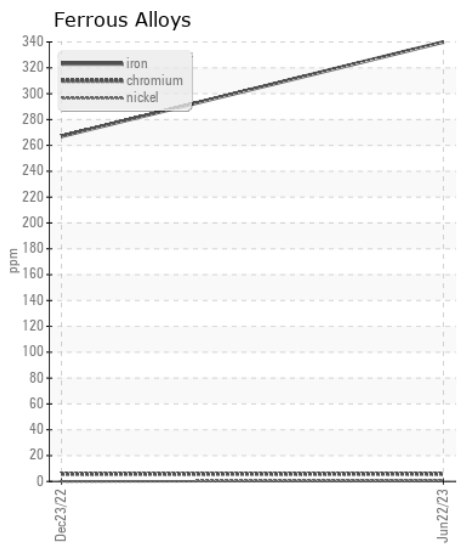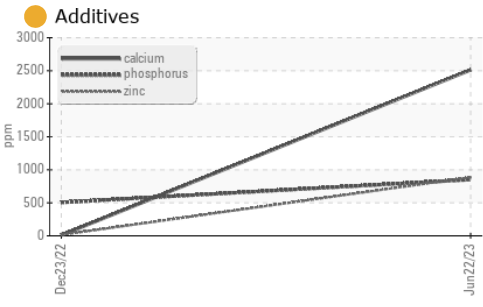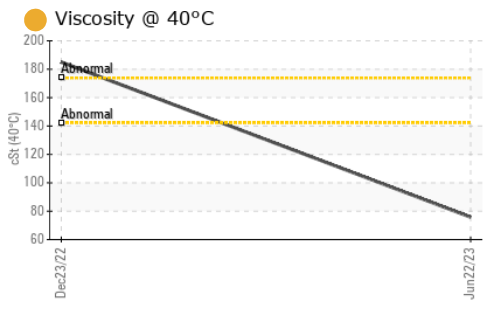

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0042387 **Received** : 28 Jun 2023  
**Lab Number** : 05885860 **Tested** : 02 Jul 2023  
**Unique Number** : 10536343 **Diagnosed** : 02 Jul 2023 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (740)373-5570