



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
CATERPILLAR 972K L11 Z4W00459
 Component
Diesel Engine
 Fluid
TRC MOLY XL PRO-SPEC IV XP 15W40 (9 GAL)

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR05889800	---	---
Sample Date		Client Info		29 Jun 2023	---	---
Machine Age	hrs	Client Info		16351	---	---
Oil Age	hrs	Client Info		987	---	---
Filter Age	hrs	Client Info		987	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	39	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>2	<1	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>25	7	---	---
Lead	ppm	ASTM D5185m	>40	2	---	---
Copper	ppm	ASTM D5185m	>330	2	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Light concentration of carbon/soot present in the oil.


Silicon	ppm	ASTM D5185m	>25	8	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	▲ 3.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	14.8	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	29.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		12	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		129	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		161	---	---
Calcium	ppm	ASTM D5185m		4195	---	---
Phosphorus	ppm	ASTM D5185m		980	---	---
Zinc	ppm	ASTM D5185m		1171	---	---
Sulfur	ppm	ASTM D5185m		5317	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		11.17	---	---
Visc @ 100°C	cSt	ASTM D445		16.2	---	---

▲ FT-IR (Direct Trend)

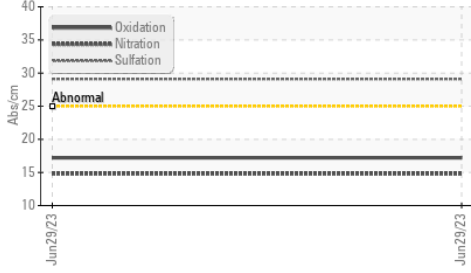

▲ Soot %

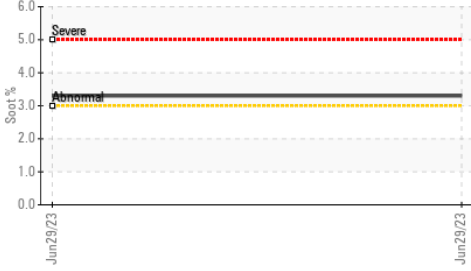


Base Number




Viscosity @ 100°C




Iron (ppm)

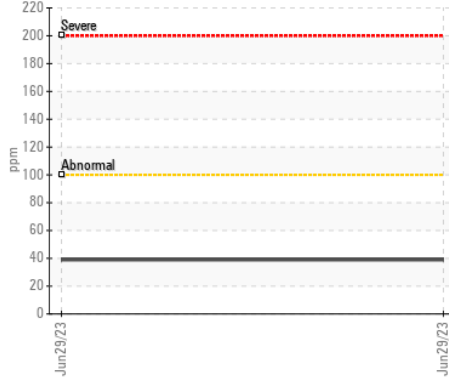


Aluminum (ppm)

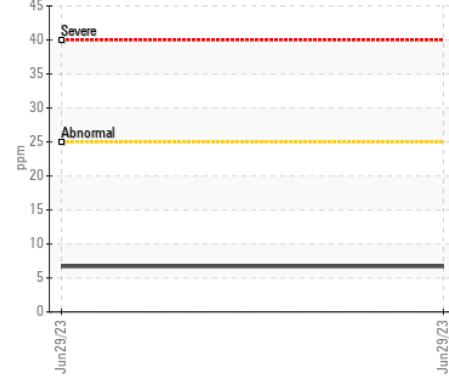


Copper (ppm)

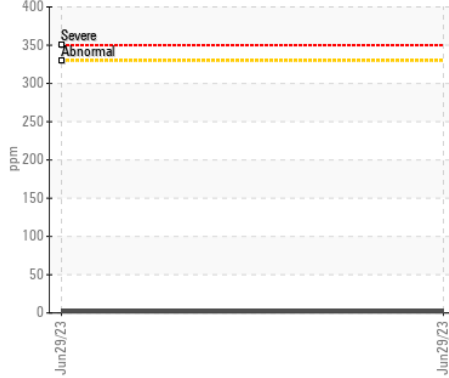


Viscosity @ 100°C

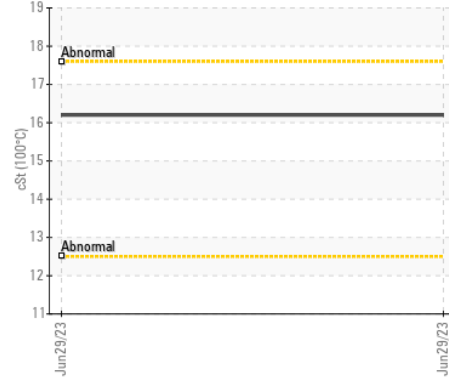


Lead (ppm)

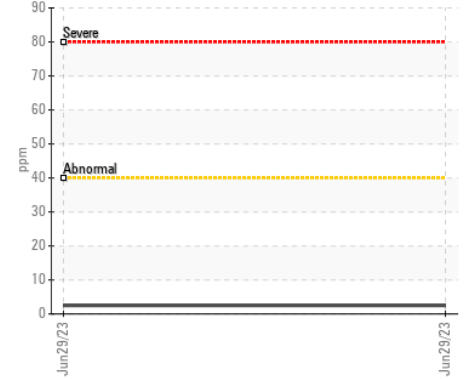


Chromium (ppm)

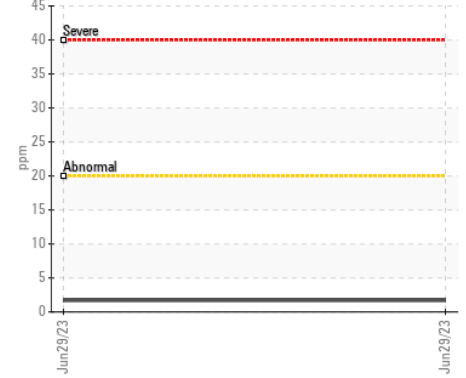

Silicon (ppm)

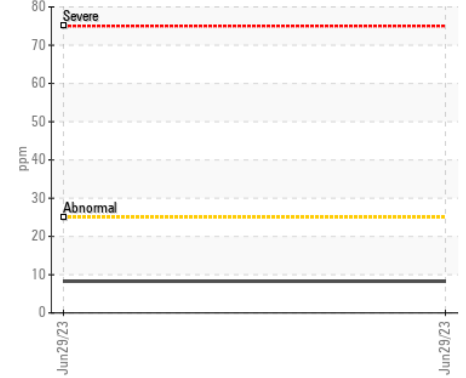

Base Number

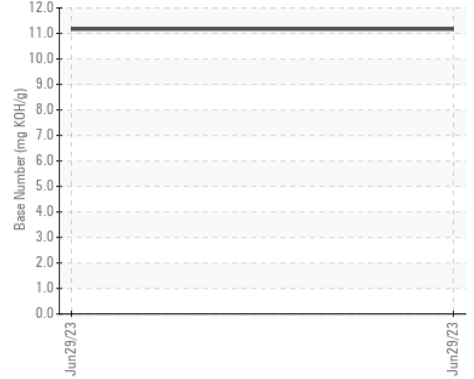

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TR05889800

Lab Number : 05889800

Unique Number : 10545610

Test Package : MOB 2

Received : 03 Jul 2023

Tested : 05 Jul 2023

Diagnosed : 05 Jul 2023 - Wes Davis

BARR-TECH COMPOSTING

9117 KALLENBERGER RD N

SPRAGUE, WA

US 99032

Contact: RON GROGAN

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (509)590-0437

F: