



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Area
{unassigned}
Machine Id
JOHN DEERE 250G 1FF250GXCKF611322
Component
Hydraulic System
Fluid
HITACHI HYDRAULIC SUPER EX 46HN (63 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0043123	LEC0033566	LEC0026431
Sample Date		Client Info		05 Jul 2023	19 Aug 2022	18 Dec 2021
Machine Age	hrs	Client Info		2878	2257	1772
Oil Age	hrs	Client Info		2878	2257	1772
Filter Age	hrs	Client Info		621	485	576
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Not Chngd	Changed	Not Chngd
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>32	14	2	<1
Chromium	ppm	ASTM D5185m	>9	0	0	0
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>9	5	<1	<1
Lead	ppm	ASTM D5185m	>28	<1	<1	0
Copper	ppm	ASTM D5185m	>50	3	<1	<1
Tin	ppm	ASTM D5185m	>5	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. Elemental level of silicon (Si) above normal indicating ingress of dirt/seal material.

Silicon	ppm	ASTM D5185m	>11	▲ 31	<1	<1
Potassium	ppm	ASTM D5185m	>20	1	<1	<1
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	● 106231	5337	13440
Particles >6µm		ASTM D7647	>20000	9259	119	1815
Particles >14µm		ASTM D7647	>640	13	4	117
Particles >21µm		ASTM D7647	>160	4	0	28
Particles >38µm		ASTM D7647	>40	0	0	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/21/16	● 24/20/11	20/14/9	21/18/14
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	0	0	0
Boron	ppm	ASTM D5185m		0	<1	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		0	<1	<1
Calcium	ppm	ASTM D5185m		8	3	0
Phosphorus	ppm	ASTM D5185m	827	485	493	453
Zinc	ppm	ASTM D5185m	0	8	9	17
Sulfur	ppm	ASTM D5185m	13	78	106	87
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.17	0.19	0.150
Visc @ 40°C	cSt	ASTM D445	47	46.2	46.2	46.4

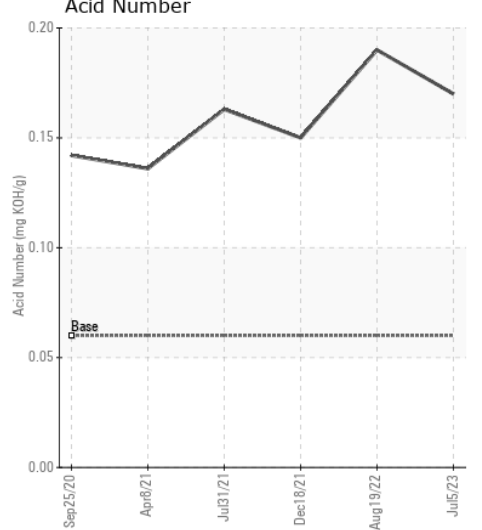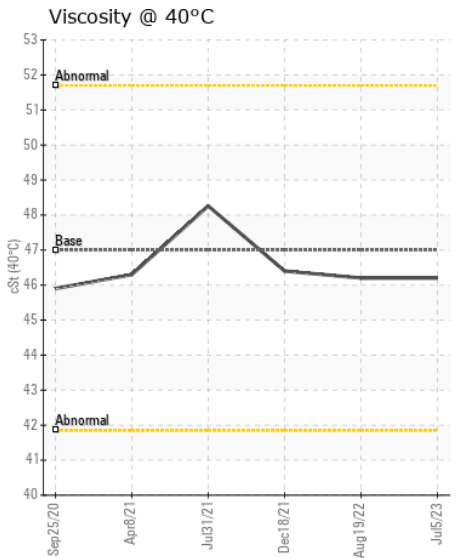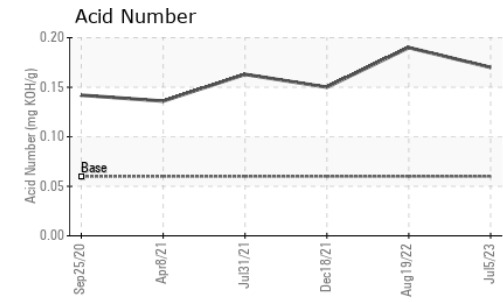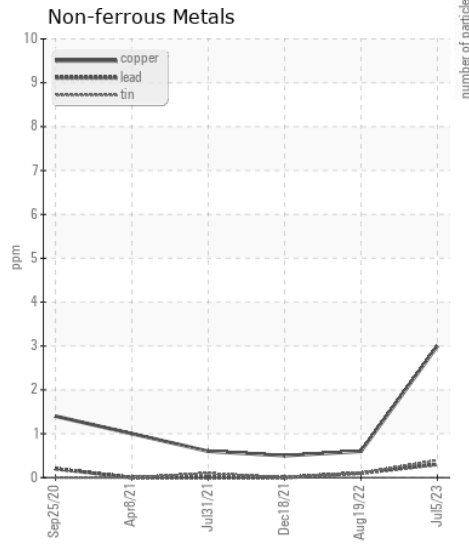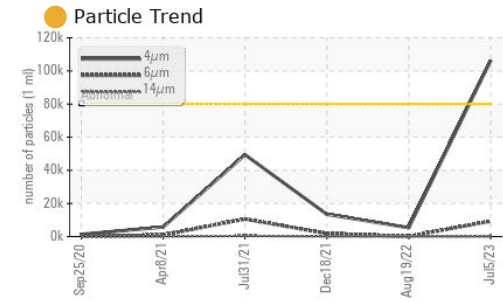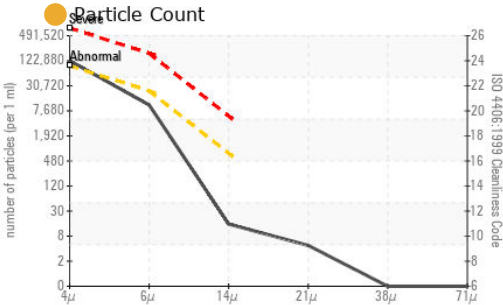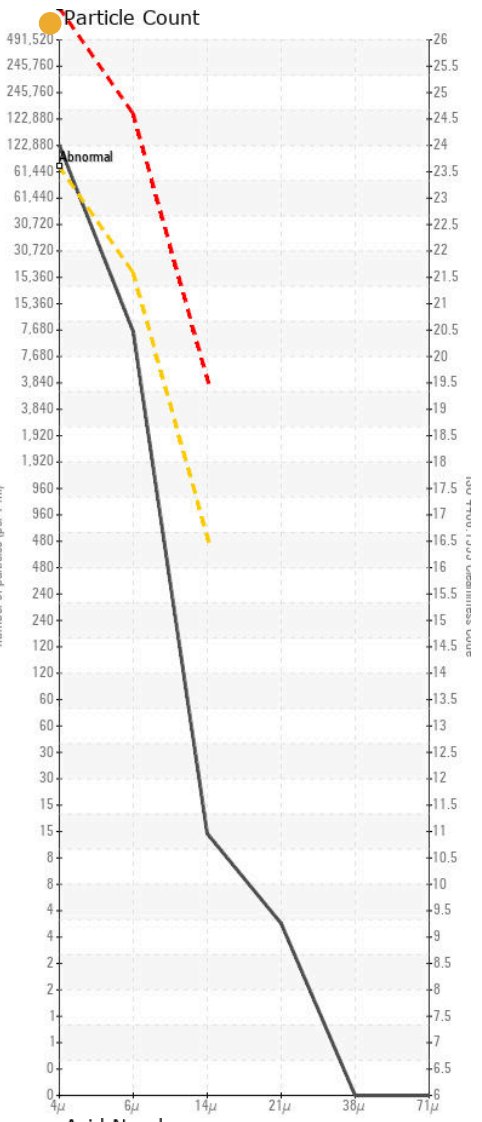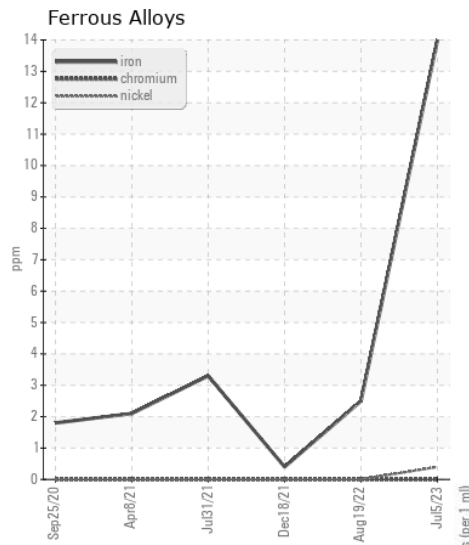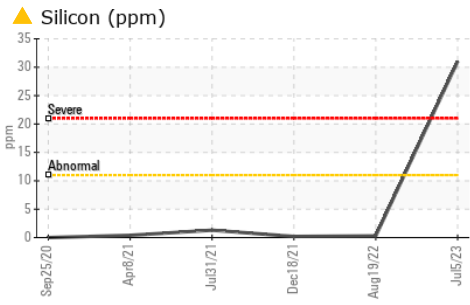

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0043123 **Received** : 07 Jul 2023
Lab Number : 05892090 **Tested** : 10 Jul 2023
Unique Number : 10547900 **Diagnosed** : 10 Jul 2023 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (740)373-5570