



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**MWL**  
Component  
**Port Reduction Gear**  
Fluid  
**PETRO CANADA DURON MARINE SAE 40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW05904495</b>	MW05843480	MW05824229
Sample Date		Client Info		<b>20 Jul 2023</b>	09 May 2023	18 Apr 2023
Machine Age	hrs	Client Info		<b>36889</b>	35715	34136
Oil Age	hrs	Client Info		<b>974</b>	1570	1241
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>24</b>	14	21
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	<1
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>50	<b>8</b>	7	13
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>4</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	<1	2
Boron	ppm	ASTM D5185m	1.0	<b>338</b>	275	275
Barium	ppm	ASTM D5185m	1.0	<b>2</b>	2	0
Molybdenum	ppm	ASTM D5185m	1.0	<b>32</b>	31	30
Manganese	ppm	ASTM D5185m	1	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	15	<b>74</b>	57	77
Calcium	ppm	ASTM D5185m	2540	<b>2297</b>	2366	2227
Phosphorus	ppm	ASTM D5185m	1000	<b>719</b>	715	683
Zinc	ppm	ASTM D5185m	1110	<b>816</b>	823	770
Sulfur	ppm	ASTM D5185m	3700	<b>3114</b>	2853	3187
Acid Number (AN)	mg KOH/g	ASTM D8045	2.7	<b>0.94</b>	0.90	0.79
Visc @ 40°C	cSt	ASTM D445	133.5	<b>127</b>	130	127

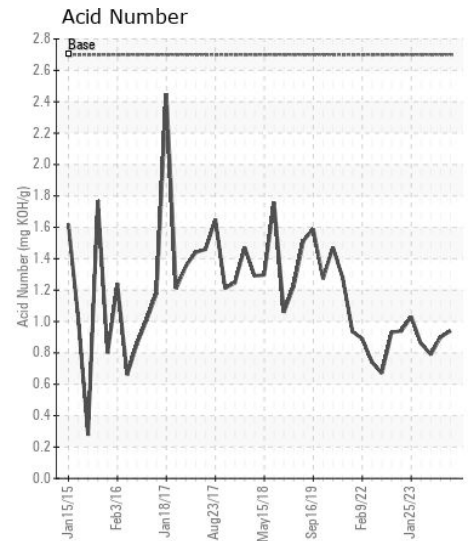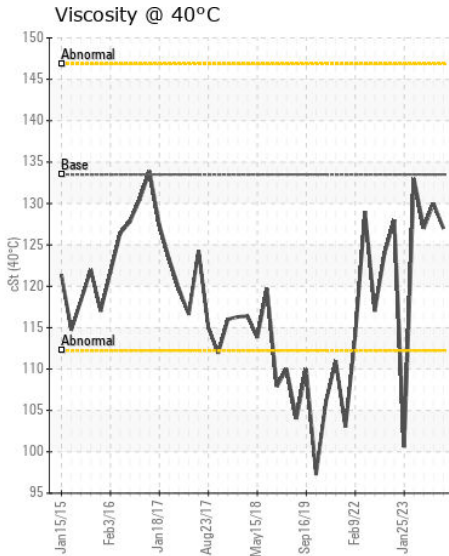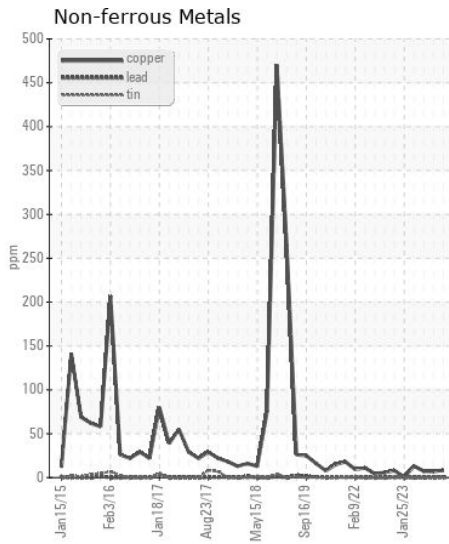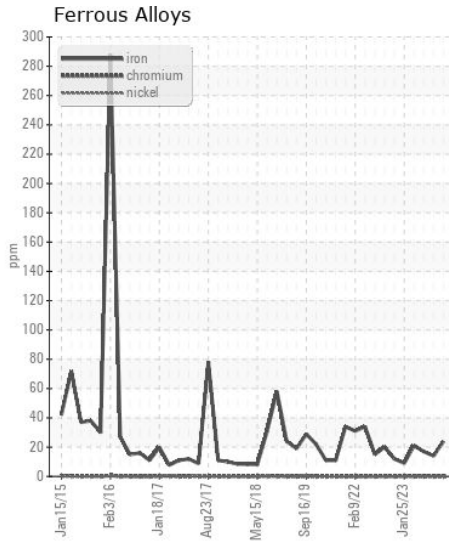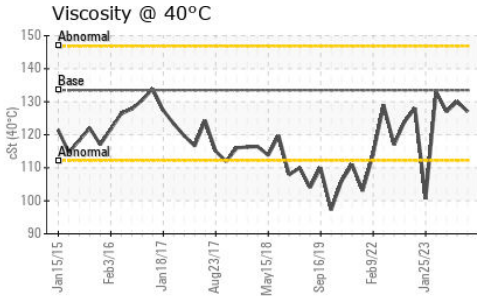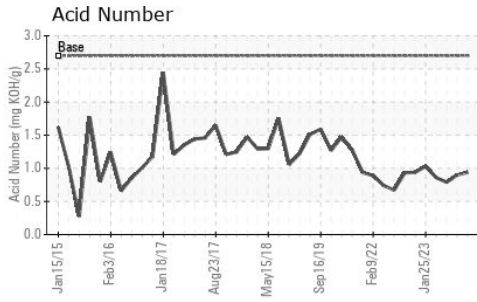

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW05904495  
**Lab Number** : 05904495  
**Unique Number** : 10565851  
**Test Package** : MAR 2  
**Received** : 21 Jul 2023  
**Tested** : 24 Jul 2023  
**Diagnosed** : 25 Jul 2023 - Angela Borella

**ILLINOIS MARINE TOWING**  
 PO BOX 391  
 LEMONT, IL  
 US 60439  
 Contact: RHETT DANIEL  
 rdaniel@imtowing.com  
 T: (630)280-4926  
 F: (630)739-2041

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)