



Machine Id  
**HBR**  
Component  
**Port Reduction Gear**  
Fluid  
**PETRO CANADA DURON MARINE SAE 40 (7 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW05904497</b>	MW05843486	MW05824219
Sample Date		Client Info		<b>20 Jul 2023</b>	09 May 2023	18 Apr 2023
Machine Age	hrs	Client Info		<b>25264</b>	24496	23890
Oil Age	hrs	Client Info		<b>768</b>	1210	607
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>10</b>	8	5
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	0	1
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>7</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	<1	2
Boron	ppm	ASTM D5185m	1.0	<b>665</b>	401	413
Barium	ppm	ASTM D5185m	1.0	<b>2</b>	2	0
Molybdenum	ppm	ASTM D5185m	1.0	<b>61</b>	49	45
Manganese	ppm	ASTM D5185m	1	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	15	<b>47</b>	69	64
Calcium	ppm	ASTM D5185m	2540	<b>4354</b>	3162	3051
Phosphorus	ppm	ASTM D5185m	1000	<b>1317</b>	964	915
Zinc	ppm	ASTM D5185m	1110	<b>1452</b>	1071	1047
Sulfur	ppm	ASTM D5185m	3700	<b>5277</b>	3427	4140
Acid Number (AN)	mg KOH/g	ASTM D8045	2.7	<b>1.33</b>	1.31	1.22
Visc @ 40°C	cSt	ASTM D445	133.5	<b>124</b>	119	128

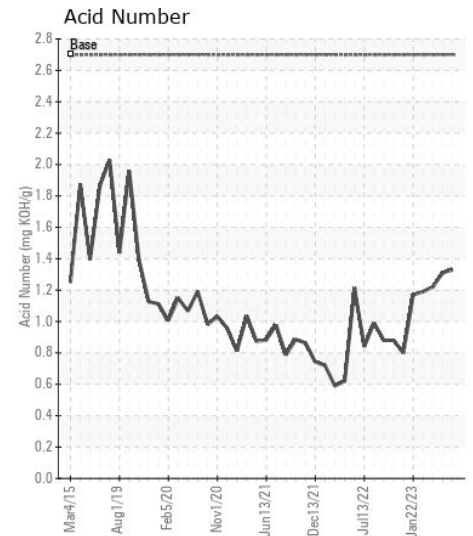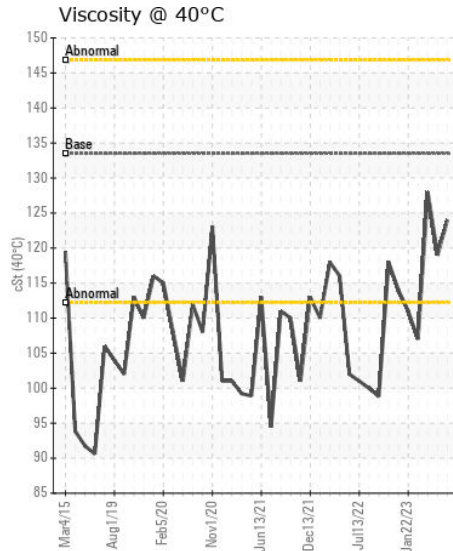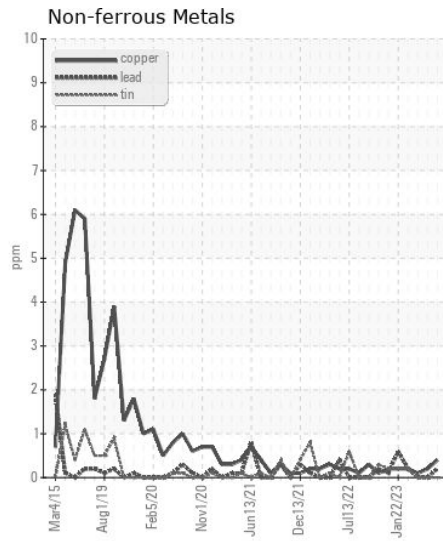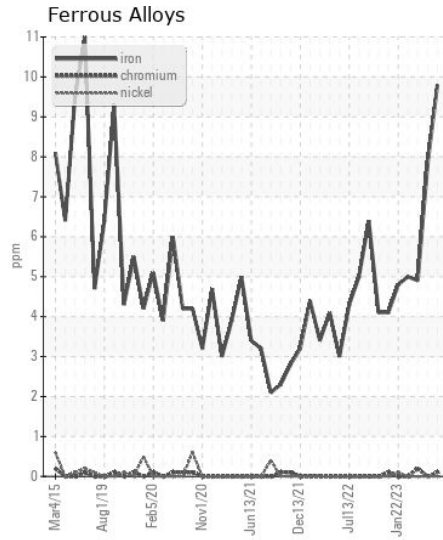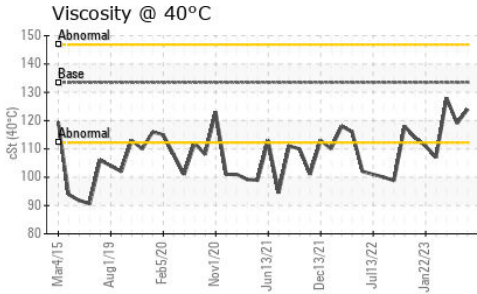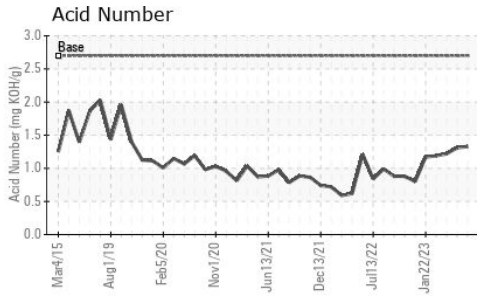

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW05904497

**Lab Number** : 05904497

**Unique Number** : 10565853

**Test Package** : MAR 2

**Received** : 21 Jul 2023

**Tested** : 24 Jul 2023

**Diagnosed** : 25 Jul 2023 - Angela Borella

**ILLINOIS MARINE TOWING**

PO BOX 391

LEMONT, IL

US 60439

Contact: RHETT DANIEL

rdaniel@imtowing.com

T: (630)280-4926

F: (630)739-2041

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)